OMNIDRIVE

# STOCK MOTOR CATALOG

OD-513

WWW.OMNIDRIVE.CA

# OMNIDRIVE

## WHAT'S NEW INSIDE

### NEW OEM REPLACEMENT MOTORS

BROAN, GREENHECK, LOREN COOK, PENN VENTILATOR
TJERNLUND, VENMAR, VANEE & MORE..

### ALUMINUM FRAME TEFC MOTORS

56, 56C & 56J THREE PHASE - REMOVABLE FEET
F-1, F-2 & F-0 MOUNTING - INVERTER DUTY
56 & 56H (5/8" SHAFT) - 56HZ (7/8" SHAFT)

### STAINLESS STEEL MOTORS

1/3 TO 10 HP - 3600, 1800, 1200 RPM - 56C TO 215TC
TEFC & TENV ENCLOSURES - RIGID BASE

### RIGHT ANGLE WORM GEAR REDUCERS

56C INPUT FLANGE - ALUMINUM ALLOY HOUSING
HOLLOW, SINGLE OR DOUBLE OUTPUT SHAFT

A COMPLETE LISTING OF NEW MODELS IS AVAILABLE IN THE INDEX (PAGE 65 - 69)

INDICATED BY SYMBOL "‡"

# TABLE OF CONTENTS


PAGE

'C' Frame Skeleton Motors ..... 1

Crossflow & Centrifugal Blowers ..... 2
Blower Reference Dimension Chart ..... 3
Axial Fans & Accessories + Inline Centrifugal Fans ..... 4

Unit Bearing Fan Motors ..... 5

ECM Evaporator Fan Motors & ECM Unit Bearing Style Motors ..... 6

3.3" Diameter Hubless Fan Motors ..... 7
3.3" Diameter Draft Inducer Motors ..... 8
3.3" Diameter Refrigeration Motors ..... 9
3.3" Diameter Open Construction (115V) ..... 10
3.3" Diameter Open Construction (230V + Double Shaft) ..... 11
3.3" Diameter TEFC Construction (115V) ..... 12
3.3" Diameter TEFC Construction (230V + Double Shaft) ..... 13

4.1" Diameter Open & TEFC Construction ..... 14

5" Diameter Open Construction ..... 15
5" Diameter TEFC Construction ..... 16

OEM Replacement Motors ..... 17 - 39

48 Frame - Single Phase Belt Drive Motors ..... 40
48 Frame - 575 Volt Direct Drive Blower Motors ..... 41
48 Frame - Flex Mount & Direct Drive Blower Motors ..... 42
48 Frame - Condenser Fan Motors ..... 43
48 Frame - Unit Heater & Exhaust Fan Motors ..... 44
48 Frame - Pedestal Fan Air Circulator Motors ..... 44

General Purpose - Single Phase Motors - Rolled Steel TEFC ..... 45
General Purpose - Single Phase Motors - Rolled Steel ODP & TEFC ..... 46

56 Frame - Three Phase Motors - Rolled Steel ODP ..... 47
NEMA Premium - Three Phase Motors - Rolled Steel ODP ..... 48

56 & 56HZ Frame - Three Phase Motors - Aluminum Frame TEFC ..... 49 - 50
56C & 56 HCZ Frame - Three Phase Motors - Aluminum Frame TEFC ..... 51 - 52
56 Frame - Three Phase Motors - Rolled Steel TEFC ..... 53
NEMA Premium - Three Phase Motors - Rolled Steel TEFC ..... 54
NEMA Premium - Three Phase Motors - Cast Iron TEFC ..... 55

Circulator Pump Motors - Single Phase Motors - ODP ..... 56
Jet Pump Motors - Three Phase Motors - Aluminum Frame TEFC ..... 57
Close Coupled Pump Motors - Three Phase Motors - Rolled Steel ODP & TEFC ..... 58

Permanent Magnet DC Motors ..... 59

Stainless Steel Motors - Three Phase Motors - TEFC & TENV ..... 60

Worm Gear - Right Angle Speed Reducer ..... 61

NEMA Transition Motor Bases ..... 62
NEMA Adjustable Motor Bases - Single Adjusting Bolt ..... 63
NEMA Adjustable Motor Bases - Double Adjusting Bolt ..... 64

**Index - Stock Number to Page** ..... 65 - 69

# 'C' Frame - Skeleton Motors

## Heating, Refrigeration & Ventilation Motors

**Features:**

- All Angle Mount
- Continuous Duty, Air Over
- Class 'B' Insulation
- UL Listed & CSA Approved
- Mechanically Reversible
- Shaded Pole
- Impedance or Thermally Protected
- One & Two Speed
- 60 Hz.
- Sleeve Bearings

SS3100

SS3670

SS617 - SS630 - SS3103
SS604 - SS611

SS601 - SS603 - SS613

SS605

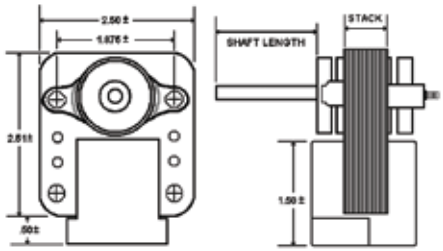

SS610

SS3101

SS635

| Stock # | Stack | Volts | Amps. | RPM | Rotation | Shaft | Comments |
|---|---|---|---|---|---|---|---|
| SS617 | 3/8" | 208-240 | 0.22 | 1900 | CWSE | 3/16" x 1-1/4" | "C" Groove on Shaft, 12" Leads w/ Terminals |
| SS611 | 1/2" | 120 | 0.60 | 1500 | CCWSE | 3/16" x 1-5/8" | "C" Groove on Shaft, 8" Cord & Plug |
| SS630 | 1/2" | 120 | 0.75 | 3000 | CCWSE | 7/32" x 1-13/16" | "C" Groove on Shaft, 6" Cord & Plug |
| SS603 | 5/8" | 120 | 0.63 | 2400 | CCWSE | 7/32" x 2-1/8" | "C" Groove on Shaft, 10" Cord & Plug |
| SS604 | 5/8" | 120 | 0.78 | 2700 | CCWSE | 3/16" x 1-3/16" | Round Shaft 9" Cord & Plug |
| SS613 | 5/8" | 120 | 0.56 | 1600 | CCWSE | 7/32" x 2-7/16" | 2 "C" Groove on Shaft 10" Cord & Plug |
| SS3100 | 5/8" | 115 | 0.59 | 3000 | CCWSE | 7/32" x 1-11/16" | Includes Paddle Fan Blade |
| SS3670 | 5/8" | 120 / 240 | 0.40 / 0.26 | 3000 | CWSE | 3/16" x 1-9/16" | Fan Kit and Mounting Accessories |
| SS601 | 3/4" | 120 | 0.75 | 3000 | CCWSE | 1/4" x 2-5/16" | Includes 1/4" to 5/16" Bushing, 6" Cord & Plug |
| SS3103 | 3/4" | 120 | 0.81 | 3000 | CCWSE | 7/32" x 2-7/16" | Breakaway Shaft 15" Cord & Plug |
| SS605 | 7/8" | 120 | 1.00 | 2800 | CCWSE | 3/16" x 1-3/4" | 30" Leads |
| SS610 | 7/8" | 120 | 1.20 / 0.75 | 2400 / 2 | CCWSE | 7/32" x 1-3/16" | "C" Groove on Shaft - 2 Speed |
| SS3101 | 7/8" | 120 | 0.70 | 3000 / 2 | CWSE | 7/32" x 1-15/16" | "C" Groove on Shaft - 2 Speed |
| SS635 | 1-1/2" | 208 - 240 | 1.20 / 0.83 | 1550 | CCWSE | 1/4" x 1-1/2" | 12" Leads with Terminals |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

# Crossflow & Centrifugal Blowers

## General Purpose & OEM Replacement

Refrigeration, Food Service, Gas/Wood Burning Stoves and Fireplaces

### Features:

- All Angle Mount
- Continuous Duty, Air Over
- Class 'B' Insulation
- UL Listed & CSA Approved
- Shaded Pole
- Thermally Protected
- Single, Two & Three Speed Models
- Variable Speed Model
- 60 Hz.
- Sleeve Bearings
- 115 Volts

UB5

UB3

UB4

UB33

UFB189

UB579

UFB500

UB160

UB168

UB1

UB200T-2

UB265

UB465




| Stock # | CFM | HP | Amps. | RPM | A | B | E | Comments |
|---|---|---|---|---|---|---|---|---|
| UB5 | 50 | 1/125 | 0.40 | 1550 | 6-3/8" | 5-3/4" | 3-3/4" | 32" Leads - T.E. Motor |
| UB3 | 100 | 1/50 | 0.80 | 3000 | 6-1/2" | 6-7/8" | 3-3/8" | 6' Cord & Plug |
| UB4 • | 100 | 1/40 | 0.88 | 3000 | 6-1/4" | 5-1/2" | 3-1/2" | 17" Leads - T.E. Motor |
| UB33 | 100 | 1/50 | 0.88 | 3200 | 6-7/8" | 6-7/8" | 3-3/4" | 6' Cord & Plug - Variable Speed |
| UFB189 | 100 | 1/50 | 1.10 | 3000 | 7.10" | 7.61" | 4.81" | Hot Water Heater |
| UB579 | 100 | 1/35 | 1.20 | 3000 | 7.13" | 7.67" | 4.70" | Radiant Tube Heater |
| UFB500 | 140 | 1/30 | 1.10 | 2860 | 6-1/2" | 6-1/2" | 3-1/8" | Conduit Box |
| UB160 | 160 | 1/33 | 1.10 | 1550 | 8-1/4" | 8-1/8" | 4-1/4" | Leads - No Conduit Box |
| UB168 | 168 | ---- | 1.00 | 3000 | 4-1/8" | 4.00" | 3-1/4" | 24" Cord & Plug |
| UB1 | 200 | 1/30 | 1.20 | 2700 | 6-1/8" | 5-1/2" | 3-1/4" | 6' Cord & Plug |
| UB200T-2 | 200 | 1/100 | 0.60 | 1600 | ---- | ---- | ---- | 3 Speed Switch w/ Cord & Plug, 8" Heat Sensor Leads |
| UB265 | 265 | 1/25 | 1.40 | 1550 | 8-1/2" | 9-1/4" | 4-1/4" | Conduit Box |
| UB465 | 465 | 1/15 | 2.60 | 1550 | 8-1/2" | 9-1/4" | 5-5/8" | 2 Speed - Conduit Box - Heat Sink |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# Crossflow & Centrifugal Blowers

## Blower Reference Dimension Chart




Figure 1

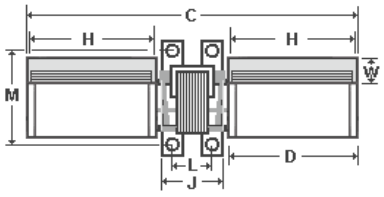


Figure 2




Figure 3




Figure 4

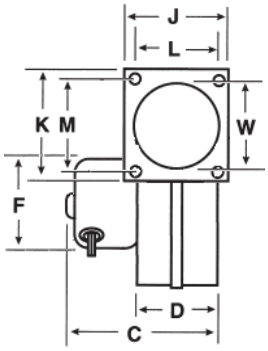


Figure 5

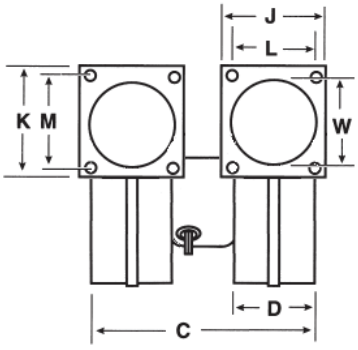


Figure 6

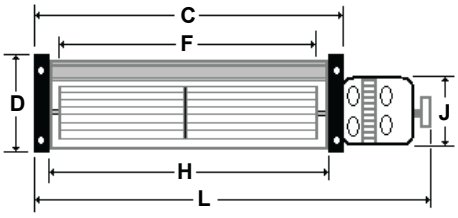


Figure 7

| Stock # | CFM | Figure | C | D | F | H | L | J | K | M | W |
|---|---|---|---|---|---|---|---|---|---|---|---|
| UB5 | 50 | 5 | 4-3/4” | 2-1/4” | 3-3/8” | ---- | 1-7/8” | 2-3/4” | 3-1/2” | 2-1/2” | 2.00” |
| UB3 | 100 | 5 | 5-1/2” | 2-5/16” | 3-3/8” | ---- | 2-1/4” | 3.00” | 3.00” | 2-1/4” | 2.00” |
| UB4 • | 100 | 4 | 6-3/8” | 2-1/4” | 3-3/8” | ---- | ---- | ---- | ---- | ---- | 2-1/8” |
| UB33 | 100 | 5 | 6-3/4” | 2-1/4” | 3-3/8” | ---- | 2-1/4” | 3.00” | 3.00” | 2-1/4” | 2.00” |
| UFB189 | 100 | 3 | 5-3/4” | 1-3/4” | 3-3/8” | 1.65” | ---- | 2-3/4” | 3.76” | 1.00” | 2.57” |
| UB579 | 100 | 3 | 5 3/8” | 1.70” | 3-3/8” | 1.78” | 3.01” | 4-1/2” | 5-1/8” | 3.01” | 2.46” |
| UFB500 | 140 | 3 | 6.00” | 2-1/2” | 3-3/8” | 2-1/2” | 4.00” | 5-1/8” | 4.00” | 1-1/2” | 2-1/2” |
| UB160 | 160 | 3 | 6-3/4” | 3-1/2” | 3-3/8” | 3-1/4” | 4-1/8” | 4-3/4” | 4-3/4” | 1-1/2” | 3-1/4” |
| UB168 | 168 | 2 | 12-1/4” | 4-5/8” | 3-3/8” | 4-1/2” | 1-5/8” | 2-5/8” | ---- | 3-5/8” | 1.00” |
| UB1 | 200 | 6 | 8-1/2” | 2-3/4” | 3-3/8” | ---- | 2-1/4” | 3.00” | 3.00” | 2-1/4” | 2.00” |
| UB200T-2 | 200 | 7 | 11-1/2” | 4-1/4” | 9-1/2” | 10-1/4” | 15.00” | 3-3/8” | ---- | ---- | ---- |
| UB265 | 265 | 3 | 7.00” | 1-1/4” | 3-3/8” | 4.00” | 4-3/4” | 5-1/2” | 5.00” | 4-1/4” | 3-1/2” |
| UB465 | 465 | 1 | 10-1/2” | 8.00” | 3-3/8” | 7-7/8” | 8-3/4” | 9-1/2” | 5.00” | 4-3/8” | 3-5/8” |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

BF51 - BF52

BF61 - BF62

BF101 - BF102

BFC24 - BFC36

FG5 - FG6 - FG10

Includes 24" Lead Assembly

| Stock # | CFM | Watts | Volts | Amps. | Dimensions | Hz | Replaces |
|---|---|---|---|---|---|---|---|
| BF51 | 100 | 21/19 | 115 | 0.40/0.28 | 4-11/16" x 4-11/16" x 1.50" | 50/60 | 4WT42, RF205 |
| BF61 • | 240 | 30/29 | 115 | 0.28/0.25 | 6-3/4" x 6-1/8" x 2.00" | 50/60 | 4C720, 4WT42, RF240 |
| BF101 • | 560 | 36 | 115 | 0.35 | 10" x 10" x 3.50" | 50/60 | 4C688, 4WT44, RF250 |
| BF52 | 100 | 25/19 | 230 | 0.20/0.14 | 4-11/16" x 4-11/16" x 1.50" | 50/60 | 4WT33, RF215 |
| BF62 • | 240 | 29/28 | 230 | 0.13/0.12 | 6-3/4" x 6-1/8" x 2.00" | 50/60 | 4WT43, RF245 |
| BF102 • | 560 | 36 | 230 | 0.19 | 10" x 10" x 3.50" | 50/60 | 4C829, 4WT45, RF255 |

| Stock # | Description |
|---|---|
| BFC24 | Axial Fan Lead Assembly 24 Inches |
| BFC36 | Axial Fan Lead Assembly 36 Inches |
| FG5 | Fan Guard for 4-11/16" (BF51 & BF52) |
| FG6 | Fan Guard for 6-3/4" (BF61 & BF62) |
| FG10 | Fan Guard for 10" (BF101 & BF102) |

# Inline Centrifugal Fans

Ventilation, Exhaust, In-line Boosting, Dryer Vent Boosting and Hydroponics

**Features:**

- Installs In Any Position
- High Pressure & Volume
- Supplied With 8 Foot Cord & Plug
- Mounting Bracket Included
- Backwards Inclined Fan Blades
- Steel Housing, Baked Powder Coat Finish
- Permanently Sealed Ball Bearings

THREE YEAR WARRANTY

| Stock # | Duct Diameter | CFM | Watts | Volts | Amps. | Hz. | dBA |
|---|---|---|---|---|---|---|---|
| VENT-100 | 4 INCH | 175 | 98 | 120 | 0.97 | 60 | 0.90 |
| VENT-150 | 6 INCH | 435 | 130 | 120 | 0.97 | 60 | 1.00 |
| VENT-200 | 8 INCH | 745 | 210 | 120 | 1.76 | 60 | 1.90 |
| VENT-250 | 10 INCH | 785 | 230 | 120 | 2.00 | 60 | 1.90 |
| VENT-315 | 12 INCH | 1075 | 295 | 120 | 2.50 | 60 | 2.60 |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# Unit Bearing Fan Motors
## Cast Iron - Two Mounting Feet

**Features:**

- Totally Enclosed Construction
- Cast Iron Construction
- Continuous Duty, Air Over
- Shaded Pole Design
- All Models Include; Vibration Dampening Hub Washer, Speed Nut & 4 Mounting Screws
- 115 & 230 Volt
- UL & CSA Recognized
- Horizontal & Shaft Up Mounting Only

All Models

| Stock # | Watts | RPM | Volts | Amps. | Rotation | "A" | Rear Mounting Holes |
|---|---|---|---|---|---|---|---|
| SS5109 | 2 | 1550 | 115 | 0.25 | CWLE | 2.39" | 3 |
| SS5211 | 4 | 1550 | 115 | 0.29 | CWLE | 2.39" | 3 |
| SS5212 | 4 | 1550 | 115 | 0.29 | CCWLE | 2.39" | 3 |
| SS5221 | 4 | 1550 | 230 | 0.15 | CWLE | 2.39" | 3 |
| SS5222 | 4 | 1550 | 230 | 0.15 | CCWLE | 2.39" | 3 |
| SS5311 | 6 | 1550 | 115 | 0.40 | CWLE | 2.93" | 3 |
| SS5312 | 6 | 1550 | 115 | 0.40 | CCWLE | 2.93" | 3 |
| SS5411 | 9 | 1550 | 115 | 0.55 | CWLE | 2.93" | 3 |
| SS5412 | 9 | 1550 | 115 | 0.55 | CCWLE | 2.93" | 3 |
| SS5421 | 9 | 1550 | 230 | 0.27 | CWLE | 2.93" | 3 |
| SS5422 | 9 | 1550 | 230 | 0.27 | CCWLE | 2.93" | 3 |
| SS5811 | 16 | 1550 | 115 | 1.00 | CWLE | 3.19" | 3 |
| SS5812 | 16 | 1550 | 115 | 1.00 | CCWLE | 3.19" | 3 |
| SS5821 | 16 | 1550 | 230 | 0.50 | CWLE | 3.19" | 3 |
| SS5822 | 16 | 1550 | 230 | 0.50 | CCWLE | 3.19" | 3 |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

# ECM Evaporator Fan Motors

## Commerical Refrigeration Applications

Energy Efficient Electronically Commutated Brushless DC Motors

### Features:

- Up to 70% Efficiency
- Cost Effectiveness, Competitively Priced For Low Initial Investment
- Energy & Cost Saving, Payback In Less Than One Year
- $CO^2$ Reduction, Eco-Friendly Technology
- ECR Motors Are Ideal For Retrofit & New Installations
- Clockwise Shaft End Rotation, 19" Sleeved Leads With 2 Pin Plug
- Standard 5/16" Shaft Diameter, 2-1/2" Length With 1-3/4" Flat
- Moisture & Humidity Resistant, IP42 Enclosure Rating
- Operating Temperature Range of -30°C to +40°C (-22°F to 104°F)
- Input Voltage Range For ECR501 Motor is 100V…127V; ECR502 Motor is 190V…254V
- Drop In Replacement For Traditional Shaded Pole & P.S.C. Evaporator Fan Motors
- Reduce Inventories; One Motor Replaces 1/20HP (35W) & 1/15HP (50W) 1550 RPM Evaporator Motor Designs
- Flexible Mounting With Four Extended 8-32 UNC Threaded Thru-Bolts on 2.84" B.C.D. at Both Ends
- Fully Enclosed, Long Life Ball Bearings
- Automatic Thermal Overload/Electronic Protection

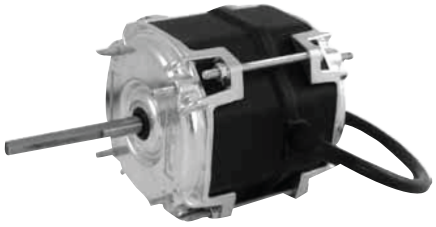

ECR501 - ECR502

| Stock # | Enclosure | Watts | Volts | Amps. | RPM | "A" | Shaft | Rotation | Industry Reference |
|---|---|---|---|---|---|---|---|---|---|
| ECR501 • | TEAO | 50 | 115 | 1.30 | 1550 | 3.58" | 5/16" x 2-1/2" | CWSE | R358, R1052, R90572, D1124, 1043336 5101, 5103, E1058, E1052 |
| ECR502 • | TEAO | 50 | 208-240 | 0.60 | 1550 | 3.58" | 5/16" x 2-1/2" | CWSE | R359, R1053, R90573, D1126, 1043766 5201, 5203, E1059, E1053 |

# ECM Unit Bearing Style Motors

## Commerical Refrigeration Applications

Energy Efficient Electronically Commutated Brushless DC Motors

### Features:

- Up to 70% Efficiency
- Cost Effectiveness, Competitively Priced For Low Initial Investment
- Reduce Inventories, One Motor Covers 4W Through 16W Applications
- Energy & Cost Saving, Payback In Less Than One Year
- $CO^2$ Reduction, Eco-Friendly Technology
- Drop In Replacement For Traditional Shaded Pole Unit Bearing Motors
- ECR Motors Are Ideal For Retrofit & New Installations
- Clockwise Opposite Shaft End Rotation, 19" Sleeved Leads With 2 Pin Plug
- Rear Mounting With Three Standard 8-32 UNC Threaded Holes
- Foot Mounting With 4 Threaded 8-32 UNC Holes
- Universal Hubless Shaft Accommodates Standard Axial Fan Blades
- Moisture & Humidity Resistant
- Input Voltage Range For ECR161 Motor Is 90V…140V
- Operating Temperature Range of -10°C to +40°C (14°F to 104°F)
- Mounting Shroud & Fan Guard Mounting With Four Extended M4 Threaded Thru-Bolts on Motor Shaft Side
- Fully Enclosed, Long Life Ball Bearings
- Automatic Thermal Overload/Electronic Protection

ECR161

| Stock # | Enclosure | Watts | Volts | Amps. | RPM | "A" | Shaft | Rotation | Industry Reference |
|---|---|---|---|---|---|---|---|---|---|
| ECR161 • | TEAO | 4...16 | 120 | 0.34 | 1800 | 2.50" | Hubless | CWOSE | 5211, 5311, 5411, 5611, 5811, 5213, 5313, 5413, 5813 |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 3.3" Diameter
## Hubless Fan Design

Commercial Refrigeration, Condensers, Unit Coolers & Display Cases

**Features:**

- Threaded Shaft (5/16") With Speed Nut
- Continuous Duty
- Class 'B' Insulation
- UL Listed & CSA Approved
- Shaded Pole
- Thermally Protected
- 60 Hz
- Totally Enclosed Construction
- Sleeve Bearings

SS124 - SS125

SS101 - SS103 - SS122 - SS137

SS101L - SS103L

SS119 - SS120 - SS133

SS250

SS108 - SS123

SS127




| Stock # | HP | Volts | Amps. | RPM | "A" | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|
| SS124 • | 1/20 | 115 | 1.55 | 1550 | 2.80" | CWSE | Lyall Cord & Plug / 4 Bolt Mounting | Foster / Dunham Bush / Hussmann |
| SS133 | 1/30 | 115 | 1.10 | 1550 | 2.59" | CWSE | 2 Speed | Markhot |
| SS101 | 1/45 | 115 | 0.90 | 1550 | 2.40" | CCWSE | Lyall Cord & Plug / 2 or 3 Bolt Mounting | Foster / Hussmann |
| SS101L | 1/45 | 115 | 0.90 | 1550 | 2.34" | CCWSE | Lyall Cord & Plug / "L" Mounting Bracket | Foster / Hussmann |
| SS103 | 1/45 | 115 | 0.90 | 1550 | 2.34" | CWSE | Lyall Cord & Plug / 2 or 3 Bolt Mounting | Foster / Hussmann |
| SS103L | 1/45 | 115 | 0.90 | 1550 | 2.34" | CWSE | Lyall Cord & Plug / "L" Mounting Bracket | Foster / Hussmann |
| SS137 | 1/70 | 115 | 0.59 | 1550 | 2.19" | CCWSE | 3 Prong Lyall Cord & Plug / 2 or 3 Bolt Mounting | Coldstream |
| SS119 | 1/70 | 115 | 0.70 | 1550 | 2.25" | CWSE | 2 or 3 Bolt Mounting | Foster |
| SS120 | 1/70 | 115 | 0.62 | 1550 | 2.25" | CCWSE | 2 or 3 Bolt Mounting | Foster |
| SS123 | 1/70 | 115 | 0.60 | 1550 | 2.59" | CCWSE | Double "U" Bracket | Ideal |
| SS250 | 1/70 | 115 | 0.65 | 1550 | 3.71" | CWSE | 3 Bolt Mounting Shaft End / 2 Speed Switch with Cord & Plug | Wood Stove |
| SS127 | 1/75 | 120 | 0.78 | 1600 | 2.00" | CWSE | 2 Bolt Mounting Shaft End / Hex Hub Shaft End | Foster |
| SS108 | 1/100 | 115 | 0.60 | 1550 | 2.00" | CWSE | "U" Bracket | Hunter / Ideal / Lear |
| SS125 • | 1/20 | 230 | 0.80 | 1550 | 2.80" | CWSE | Lyall Cord & Plug / 4 Bolt Mounting | Foster / Hunter / Dunham Bush |
| SS122 | 1/60 | 230 | 0.35 | 1550 | 2.47" | CCWSE | Lyall Cord & Plug / 2 or 3 Bolt Mounting | Coldstream / Foster |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 3.3" Diameter
## Draft Inducer Motors

**Features:**

- Continuous Duty
- Class 'B' Insulation
- UL Listed & CSA Approved
- Thermally Protected
- 60 Hz
- Ball Bearings

UFM3714

UFM410

UFM78

131410

UFM653

148053

148055



| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UFM3714 •* | 1/8 | 115/230 | 1.6 / 0.8 | 3200 | 6.98" | 1/4" x 4.00" | REV. | Conduit Box 1/4" to 5/16" Bushing | Carrier / Gen. Replacement |
| UFM410 •* | 1/10 | 115/230 | 1.4 / 0.7 | 3000 | 6.98" | 1/4" x 3.70" | REV. | Conduit Box - 3 Mounting Lugs Stainless Shaft 1/4" to 5/16" Bushing | Reznor / Fasco |
| UFM78 •* | 1/10 | 115/230 | 1.3 / 0.7 | 3200 | 4-1/8" | 5/16" x 3.25" | REV. | 4 Mounting Studs on each end - No Switch | Reznor / 43846 & 43424 |
| 131410 •* | 1/10 | 115 | 1.60 | 3000 | 4.10" | 5/16" x 3.20" | CWLE | No Conduit Box | Reznor / 131410 |
| UFM653 • | 1/12 | 230/460 | 0.60 | 3200 | 6-3/4" | 1/4" x 2.25" | CCWSE | Conduit Box - 1/4" to 5/16" Bushing | Carrier / York |
| 148053 •* | 1/20 | 115 | 0.70 | 3300 | 4.54" | 5/16" x 3.00" | CWSE | 4 Mounting Studs | Reznor / 148053 |
| 148055 | 1/33 | 115 | 1.00 | 3300 | 3.26" | 5/16" x 2.00" | CWSE | Sleeve Bearing | Reznor / 148055 |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 3.3" Diameter
## Refrigeration Motors

**Features:**

- GE 11 Frame Replacements
- Open Fan Cooled
- Resilient Rings Included For Base Mounting
- Sleeve & Sealed Ball Bearings

SS671 - SS672

SS1332

| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|
| SS671 • | 1/15 | 115 / 208-230 | 2.10 / 1.10 | 1550 | 4.50" | 5/16" x 2.20" | CCWSE | 1231, 1331, 1431, 1432 |
| SS672 | 1/15 | 115 / 208-230 | 2.10 / 1.10 | 1550 | 4.50" | 5/16" x 2.20" | CWSE | 1342, 1441, 1442 |
| SS1332 • | 1/20 | 208-230 | 1.10 | 1550 | 4.60" | 5/16" x 2.00" | CCWSE | 1332 |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 3.3" Diameter

## Open Construction

Kitchen / Bathroom Fans, Humidifiers / Dehumidifiers,
Unit Heaters, Unit Coolers & Display Cases

### Features:

- Continuous Duty
- Class 'B' Insulation
- UL Listed & CSA Approved
- Shaded Pole & P.S.C
- Thermally Protected
- 60 Hz
- Sleeve Bearings

SS307 - SS313 - SS332
SS336 - SS360 - SS368

SS358

SS315 - SS355

SS300 - SS356 - SS357

SS318 - SS326

SS030

SS370

SS303

SS205

SS304 - SS319
SS305 - SS350 - SS409

SS311




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS313 • | 1/15 | 115 | 2.20 | 1550 | 3.58" | 5/16" x 2.75" | CWSE | 12" Lyall Cord & Plug | Bohn / Torin / Kraack |
| SS355 • | 1/15 | 115 | 2.20 | 1550 | 3.11" | 5/16" x 1.90" | CCWSE | Hex Hubs | Nutone |
| SS358 | 1/15 | 115 | 2.20 | 1550 | 3.35" | 5/16" x 3.20" | CWSE | 12" Lyall Cord & Plug - Hex Hubs | Blanchard / Bohn |
| SS318 | 1/20 | 115 | 1.60 | 1550 | 2.84" | 5/16" x 2.75" | CCWSE | "U" Bracket - Grooved Shaft | Blanchard |
| SS336 | 1/20 | 115 | 1.80 | 1550 | 2.50" | 1/4" x 1.17" | CWSE | 2 Bolts Opposite Shaft End | Woods |
| SS356 | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CWSE | 12" Leads | General Replacement |
| SS357 | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CCWSE | 12" Leads | General Replacement |
| SS368 | 1/20 | 115 | 1.80 | 1550 | 2.84" | 5/16" x 2.75" | CCWSE | 15" Lyall Cord & Plug | Ref-Plus |
| SS370 * | 1/20 | 115 | 0.77 | 1550 | 4.09" | 5/16" x 2.71" | CCWSE | Lyall Cord & Plug | Keeprite |
| SS300 | 1/25 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.50" | CWSE | 12" Leads | Blanchard |
| SS030 | 1/25 | 115 | 1.70 | 1550 | 2.75" | 5/16" x 2.57" | CWSE | 12" Leads | General Replacement |
| SS303 • | 1/25 | 115 | 1.50 | 1550 | 3.77" | 5/16" x 3.28" | CWSE | C/Box & Triangle Bracket | Caloritech / Trane |
| SS307 | 1/25 | 115 | 1.45 | 3000 | 3.30" | 1/4" x 1.30" | CWSE | 9" Lyall Cord & Plug | Keeprite / Nutone |
| SS332 | 1/25 | 115 | 1.50 | 1550 | 2.59" | 5/16" x 1.50" | CCWSE | 9" Leads | Blanchard / Bohn |
| SS360 | 1/35 | 115 | 1.00 | 1550 | 2.50" | 1/4" x 1.60" | CCWSE | 3 Bolts S.E. | Keeprite |
| SS205 | 1/37 | 115 | 1.20 | 1575 | 2.75" | 1/4" x 1.75" | CCWSE | Triangle Bracket | Keeprite |
| SS304 | 1/40 | 115 | 0.89 | 1550 | 2.47" | 1/4" x 1.50" | CCWSE | 12" Leads | Nutone |
| SS305 | 1/50 | 115 | 1.00 | 2800 | 2.33" | 1/4" x 1.50" | CCWSE | 9" Cord & Plug, Grooved Shaft | Nutone |
| SS319 | 1/50 | 120 | 0.90 | 1430 | 2.09" | 1/4" x 2.22" | CWSE | 18" Cord & Plug | Dehumidifier |
| SS409 | 1/50 | 115 | 1.30 | 1550 | 2.12" | 5/16" x 1.56" | CWSE | 19" Leads | General Replacement |
| SS326 | 1/85 | 115 | 0.50 | 1550 | 1.90" | 1/4" x 1.45" | CCWSE | "U" Bracket | Blanchard / Bohn |
| SS311 | 1/100 | 115 | 0.65 | 1550 | 2.09" | 1/4" x 1.20" | CCWSE | 6" Cord & Plug - Hex Hubs | Nutone |
| SS315 | 1/100 | 120 | 0.50 | 1550 | 2.09" | 1/4" x 1.20" | CWSE | Cord & Plug - Hex Hubs Grooved Shaft | Nutone |
| SS350 | ---- | 115 | 1.20 | 1050 | 2.89" | 5/16" x 1.50" | CCWSE | 2 Speed | MarkHot |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 3.3" Diameter

## Open Construction

Kitchen / Bathroom Fans, Humidifiers / Dehumidifiers,
Unit Heaters, Unit Coolers & Display Cases

### Features:

- Continuous Duty
- Class 'B' Insulation
- UL Listed & CSA Approved
- Shaded Pole & P.S.C
- Thermally Protected
- 60 Hz
- Sleeve Bearings

SS462

56347

12027

SS671 - SS672

SS1332

SS359

SS369

SS371

SS467

SS324

SS480

SS413

SS130

SS408 - SS510

SS302




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS462 ~* | 1/12 | 120 | 1.20 | 1625/3 | 4.14" | 3.50" x 3/8" x 3.50" | CWLE | Capacitor Attached - Double Shaft | 02101 |
| 56347 ~* | 1/12 | 115 | 1.60 | 1050 | 4.14" | 3/8" x 6.10" | CCWLE | Capacitor Attached - Double Shaft | 56347-0 |
| 12027 ~* | 1/12 | 120 | 1.20 | 1625/3 | 4.14" | 3.50" x 3/8" x 3.50" | CWLE | Capacitor Attached - Double Shaft | 12027 |
| SS671 • | 1/15 | 115/208-230 | 2.10/1.10 | 1550 | 4.50" | 5/16" x 2.20" | CCWSE | Resilient Rings Included - Fan cooled | 1231, 1331, 1431, 1432 |
| SS672 | 1/15 | 115/208-230 | 2.10/1.10 | 1550 | 4.50" | 5/16" x 2.20" | CWSE | Resilient Rings Included - Fan cooled | 1342, 1441, 1442 |
| SS1332 • | 1/20 | 208 - 230 | 1.10 | 1550 | 4.60" | 5/16" x 2.00" | CCWSE | Resilient Rings Included - Fan cooled | 1332 |
| SS359 | 1/20 | 208 - 230 | 1.10 | 1550 | 3.35" | 5/16" x 3.20" | CWSE | 12" Lyall Cord & Plug - Hex Hubs | Blanchard / Bohn |
| SS369 | 1/20 | 208 - 230 | 0.95 | 1550 | 2.82" | 5/16" x 2.75" | CCWSE | 10" Lyall Cord & Plug | Ref-Plus |
| SS371 •* | 1/20 | 230 | 0.36 | 1550 | 4.09" | 5/16" x 2.71" | CCWSE | Lyall Cord & Plug | Keeprite |
| SS467 ~ | 1/20 | 120 | 1.40 | 1550 | 3.10" | 1.70" x 5/16" x 1.70" | CWLE | Cord & Plug / Hex Hubs | Broan / Nutone |
| SS324 ~ | 1/25 | 115 | 2.10 | 1550 | 2.92" | 1.95" x 5/16" x 1.95" | CWLE | Cord & Plug / Hex Hubs | Chromalox, Thermador |
| SS480 | 1/30 | 208 - 230 | 0.80 | 1500 | 4.05" | 3/8" x 2.38" | CWSE | 8 Mounting Lugs | Chromalox |
| SS413 ~ | 1/35 | 120 | 1.10 | 3000 | 3.00" | 2.25" x 1/4" x 2.50" | CCWLE | 31" Cord & Plug - Grooved Shafts | Lau |
| SS130 | 1/45 | 208 - 230 | 0.80 | 1550 | 2.71" | 5/16" x 1.50" | CCWSE | "U" Bracket - 36" Leads | Blanchard |
| SS510 ~ | 1/50 | 120 | 1.10 | 1250 | 2.12" | 1.10" x 1/4" x 1.50" | CWLE | 3 Speed - Grooved Shaft | Camco / Woods |
| SS408 ~ | 1/80 | 115 | 0.60 | 1550 | 2.20" | 1.60" x 1/4" x 1.60" | CCWLE | 2 Speed - 27" Leads | Federal Pioneer / Lau |
| SS302 | 1/100 | 240 | 0.30 | 1400 | 2.00" | 1/4" x 1.50" | CCWSE | 12" Leads | Federal Pioneer |



(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

# 3.3" Diameter
## Totally Enclosed Construction
Kitchen / Bathroom Fans, Humidifiers, Unit Heaters, Fireplace Blowers

**Features:**

- Continuous Duty
- Class 'A' or 'B' Insulation
- UL Listed & CSA Approved
- Shaded Pole
- Thermally Protected
- 60 Hz
- Sleeve Bearings

SS201 - SS202 - SS203
SS206 - SS207 - SS208
SS230 - SS232 - SS260
SS262 - SS264 - SS401
SS506

SS209 - SS214 - SS219
SS220 - SS235 - SS236
SS266 - SS801

SS213

SS403




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS266 | 1/20 | 120 | 1.45 | 1550 | 2.84" | 5/16" x 1.40" | CCWSE | 5" Cord & Plug | Reversomatic |
| SS220 | 1/20 | 115 | 1.80 | 1550 | 2.84" | 5/16" x 1.22" | CWSE | 10" Cord & Plug | Miami Carey / Leigh |
| SS219 | 1/20 | 115 | 1.80 | 1550 | 2.84" | 5/16" x 2.25" | CCWSE | 10" Cord & Plug | Nutone |
| SS213 | 1/25 | 115 | 1.40 | 1550 | 3.09" | 5/16" x 1.78" | CWSE | Conduit Box - Triangle Bracket | Chromalox / Trane |
| SS214 | 1/40 | 115 | 0.80 | 2700 | 2.83" | 1/4" x 1.45" | CCWSE | 6" Cord & Plug | Nutone / Miami Carey |
| SS202 | 1/40 | 115 | 1.00 | 1550 | 2.50" | 1/4" x 1.25" | CCWSE | 2 Speed - Grooved Shaft | Nutone |
| SS208 | 1/40 | 115 | 1.20 | 1550 | 2.50" | 1/4" x 1.95" | CCWSE | 19" Leads | General Replacement |
| SS262 | 1/40 | 115 | 1.10 | 1550 | 2.34" | 5/16" x 1.60" | CCWSE | 6" Cord & Plug | Reversomatic |
| SS801 | 1/45 | 115 | 0.90 | 1550 | 2.25" | 5/16" x 1.90" | CCWSE | 8" Cord & Plug | Nutone |
| SS236 | 1/50 | 115 | 1.00 | 1575 | 2.10" | 1/4" x 1.00" | CWSE | 2 Speed - Grooved Shaft | Woods |
| SS209 | 1/50 | 115 | 0.85 | 1550 | 2.30" | 1/4" x 1.60" | CCWSE | 5" Cord & Plug | Nutone / Miami Carey |
| SS201 | 1/50 | 115 | 0.90 | 1430 | 2.12" | 1/4" x 2.25" | CCWSE | 18" Leads | Nutone / Air King |
| SS230 | 1/70 | 115 | 0.66 | 2800 | 2.33" | 1/4" x 1.25" | CWSE | 12" Leads | Coldstream / CGE |
| SS232 | 1/70 | 120 | 0.70 | 2800 | 2.56" | 1/4" x 1.28" | CWSE | 2 Speed | Nutone |
| SS203 | 1/70 | 115 | 0.90 | 1600 | 2.10" | 1/4" x 1.50" | CWSE | 8" Cord & Plug | Nutone / Miami Carey |
| SS264 | 1/75 | 120 | 0.70 | 1550 | 2.32" | 5/16" x 2.00" | CCWSE | 8" Cord & Plug | Reversomatic |
| SS207 | 1/80 | 115 | 0.80 | 1600 | 2.00" | 1/4" x 1.56" | CCWSE | 8" Cord & Plug | Nutone / Miami Carey |
| SS235 | 1/80 | 115 | 0.90 | 1050 | 2.35" | 1/4" x 1.10" | CWSE | Grooved Shaft | Woods |
| SS260 | 1/90 | 115 | 0.60 | 1500 | 2.10" | 5/16" x 1.13" | CCWSE | 7" Cord & Plug | Reversomatic |
| SS206 | 1/100 | 115 | 0.56 | 1550 | 2.10" | 1/4" x 1.52" | CCWSE | 2 Speed | Miami Carey / Air King |
| SS403 | 1/125 | 115 | 0.40 | 1550 | 2.78" | 1/4" x 1.25" | CCWSE | On/Off Switch - 72" Cord & Plug | Newmac |
| SS506 | 1/140 | 115 | 0.50 | 1400 | 1.87" | 1/4" x 2.00" | CCWSE | 9" Cord & Plug - Grooved Shaft | Nutone / Woods |
| SS401 | 1/150 | 115 | 0.40 | 1600 | 2.10" | 1/4" x 1.50" | CWSE | 33" Leads | Enterprise |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 3.3" Diameter
## Totally Enclosed Construction

Kitchen / Bathroom Fans, Humidifiers, Unit Heaters, Fireplace Blowers

**Features:**

- Continuous Duty
- Class 'B' Insulation
- UL Listed & CSA Approved
- Shaded Pole
- Thermally Protected
- 60 Hz
- Sleeve Bearings

SS440

SS212S - SS212B - SS215

SS210 - SS217 - SS511




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS440 ~ | 1/20 | 120 | 1.60 | 1550 | 3.10" | 3.80" x 5/16" x 3.80" | CWLE | Double Shafted w/ Cord & Plug - Hex Hubs | Nutone |
| SS212S | 1/35 | 240 | 0.55 | 1550 | 2.80" | 5/16" x 3.50" | CWSE | Triangle Bracket | Chromalox |
| SS212B • | 1/35 | 240 | 0.55 | 1550 | 2.80" | 5/16" x 3.50" | CWSE | Triangle Bracket | Chromalox |
| SS217 | 1/40 | 240 | 0.50 | 1550 | 2.30" | 1/4" x 1.50" | CCWSE | 24" Leads | Chromalox / FPE |
| SS210 | 1/50 | 230 | 0.40 | 1550 | 2.30" | 1/4" x 1.50" | CWSE | 24" Leads | Chromalox / FPE |
| SS511 | 1/100 | 230 | 0.38 | 1350 | 2.00" | 1/4" x 2.00" | CCWSE | Groove on Shaft - 11" Leads | Blanchard / FPE |
| SS215 | 1/300 | 240 | 0.24 | 1200 | 2.20" | 5/16" x 2.25" | CWSE | Triangle Bracket - 24" Leads | Chromalox |



(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

# 4.1" Diameter

## Open / Totally Enclosed Construction

Exhaust Fans, Coolers, Heaters, Condensers

**Features:**

- Continuous Duty
- Class 'A' or 'B' Insulation *(Open)*
- Class 'B' Insulation *(Closed)*
- UL Listed & CSA Approved
- Shaded Pole
- Thermally Protected
- 60 Hz.
- Sleeve Bearings

Open

SS958

SS174

SS2657 - SS2658

SS2604 - SS2603

Totally Enclosed

SS008

SS2609 - SS2612




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS958 | 1/8 | 115 | 3.80 | 1550 | 3.94" | 3/8" x 2.39" | CWSE | 18" Leads - Hex Hubs | Franklin 80958 |
| SS174 | 1/10 | 115 | 3.40 | 1450 | 3.25" | 3/8" x 3.20" | CWSE | 24" Leads - Hex Hubs | Fasco D174 |
| SS2604 | 1/10 | 120 | 2.65 | 1550 | 3.42" | 1/2" x 2.03" | CCWSE | 12" Cord & Plug | Reversomatic DB300 |
| SS2657 | 1/15 | 230 | 1.20 | 1550 | 3.42" | 3/8" x 2.42" | CCWSE | 10" Lyall Cord & Plug - Hex Hubs | Keeprite 8/335 |
| SS2658 | 1/15 | 115 | 2.30 | 1550 | 3.42" | 3/8" x 2.42" | CCWSE | 10" Cord & Plug - Hex Hubs | Keeprite 8/356 |
| SS2603 | 1/35 | 115 | 1.15 | 1550 | 3.17" | 1/2" x 2.10" | CCWSE | 12" Cord & Plug - Hex Hubs | Reversomatic DB200/260 |
| SS008 • | 1/12 | 230 | 1.30 | 1550 | 3.94" | 3/8" x 1.82" | CCWSE | 13" Leads | Franklin, 75008 |
| SS2609 | 1/30 | 115 | 1.21 | 1550 | 2.92" | 1/2" x 2.35" | CCWSE | Conduit Box | Inter-City |
| SS2612 | 1/30 | 115 | 1.21 | 1550 | 2.92" | 1/2" x 2.35" | CWSE | Conduit Box | Inter-City |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 5" Diameter
## Open Construction
Unit Heaters, Furnace Blowers, Refrigeration

**Features:**

- Continuous Duty
- Mechanically Reversible
- Class "B" Insulation
- UL Listed & CSA Approved
- Shaded Pole
- Thermally Protected
- 60 Hz.
- Sleeve Bearings

SS2398

SS8318

SS2930 - SS2932 - SS2940 - SS2942

SS2497

G018

SS2605

F062




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS2398 | 1/8 | 115 | 5.00 | 1050 | 3.88" | 1/2" x 3.75" | CWSE | Cushion Rings - 3 Speed Hex Hubs, 4 Bolt Mounting Pattern 2-9/16" x 4-1/8" | General Replacement |
| SS8318 | 1/8 | 115 | 2.60 | 1550 | 3.50" | 1/2" x 2-3/4" | CCWSE | 4 Bolts - Mounted Capacitor | Greenheck 308318, McMillan A0820B3680, A0820B3859, Packard 90318 |
| SS2930 | 1/10 | 115 / 230 | 4.10 / 2.00 | 1050 | 3.88" | 3/8" x 2.80" | CWSE | Cushion Rings - Base 3/8" to 1/2" Bushing - 4 Studs on 3.50" B.C.D. | General Replacement Robbins & Myers GE 21/29 Frame |
| SS2932 | 1/10 | 115 / 208-230 | 5.00 / 2.50 | 1550 | 3.88" | 3/8" x 2.88" | CCWSE | Cushion Rings - Base 3/8" to 1/2" Bushing - 4 Studs on 3.50"B.C.D. | General Replacement Robbins & Myers GE 21/29 Frame |
| SS2940 | 1/10 | 115 / 230 | 4.10 / 2.00 | 1050 | 3.88" | 3/8" x 2.80" | CCWSE | Cushion Rings - Base 3/8" to 1/2" Bushing - 4 Studs on 3.50"B.C.D. | General Replacement Robbins & Myers GE 21/29 Frame |
| SS2942 | 1/10 | 115 / 208-230 | 5.00 / 2.50 | 1550 | 3.88" | 3/8" x 2.88" | CWSE | Cushion Rings - Base 3/8" to 1/2" Bushing - 4 Studs on 3.50"B.C.D. | General Replacement Robbins & Myers GE 21/29 Frame |
| SS2497 | 1/10 | 115 | 3.40 | 1100 | 2.25" | 1/2" x 1-5/8" | CWSE | Includes Mounting Hardware | A0510B2497, A0416B2059 A0510B2389 |
| G018 • | 1/10 | 600 | 0.64 | 1550 | 4.00" | 1/2" x 7.23" | CWSE | Extended Thru-Bolts BX Connector | Federal Pioneer |
| SS2605 | 1/12 | 115 | 3.00 | 1050 | 3.00" | 1/2" x 3.00" | CCWSE | 8" Cord & Plug, 4 Bolt Mounting Pattern 2-9/16" x 4-1/8" | Reversomatic |
| F062 • | 1/20 | 600 | 0.42 | 1550 | 4.00" | 1/2" x 2.58" | CWSE | Tapped Holes on Shaft End | HACFM |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 5" Diameter
## Totally Enclosed Construction
Unit Heaters, Furnace Blowers, Refrigeration

**Features:**

- Continuous Duty
- Mechanically Reversible (S.P. Only)
- Class "A" Insulation
- UL Listed & CSA Approved
- Shaded Pole & P.S.C Designs
- Thermally Protected
- Long Life Sleeve Bearings or Sealed Ball Bearings

SS2615 - SS2360

SS2380

J011

SS6920




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS2615 | 1/8 | 115 | 4.60 | 1050 | 3.87" | 1/2" x 3.30" | CWSE | Cushion Rings 3 Mounting Studs S.E. | Reznor / Luxaire |
| SS2380 * | 1/8 | 115 | 2.30 | 1075 | 4.90" | 1/2" x 2.20" | CWSE | Resilient Base | Robbins & Myers / Reznor |
| J011 • | 1/10 | 600 | 0.83 | 1550 | 4.00" | 1/2" x 7.23" | CWSE | 4 Studs on Shaft End | Chromalox |
| SS2360 | 1/15 | 115 | 2.30 | 1050 | 3.26" | 1/2" x 2.80" | CWSE | Cushion Rings 3 Mounting Studs S.E. | Reznor / Luxaire |
| SS6920 | 1/15 | 115 | 2.70 | 1050 | 3.87" | 3/8" x 3.55" | CWSE | Cushion Rings 4 Studs on 3.50" B.C.D. | Robbins & Myers / Lennox ICP / Keeprite |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Airdex

UB160

UB265

UB465

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB160 | Blower | 1/33 | 115 | 1.10 | 1550 | 6-3/4" | ---- | 160 | 50755-D500, 7017340 |
| UB265 | Blower | 1/25 | 115 | 1.40 | 1500 | 7.00" | ---- | 265 | B45227, 7017300 |
| UB465 | Blower | 1/15 | 115 | 2.60 | 1550/2 | 10-1/2" | ---- | 465 | B45267, 7017320 |

## Air King

SS3670

SS603

SS201 - SS206

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS3670 | Skeleton | ---- | 120 / 240 | 0.40 / 0.26 | 3000 | 5/8" | 3/16" x 1-9/16" | CWSE | Vent Fan |
| SS603 | Skeleton | ---- | 120 | 0.63 | 2400 | 5/8" | 7/32" x 2-1/8" | CCWSE | 2108370033, 56, 57 |
| SS201 | 3.3" | 1/50 | 115 | 0.90 | 1430 | 2.12" | 1/4" x 2.25" | CCWSE | Vent Fan |
| SS206 | 3.3" | 1/100 | 115 | 0.56 | 1550 | 2.10" | 1/4" x 1.52" | CCWSE | 2108375036, 44 |

## Aston / Air2000

SS356

A2000

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS356 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CWSE | Heat Recovery Ventilator |
| A2000 • | 3.3" | 1/25 | 120 | 1.20 | 1550 | 2.85" | 5/16" x 1.40" | CWSE | Heat Recovery Ventilator |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Blanchard-Ness

SS605

SS358 - SS359

SS318 - SS326

SS300

SS332

SS130

SS302

SS511

SS739B

RMT0062

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS605 | Skeleton | --- | 120 | 1.00 | 2800 | 5/8" | 3/16" x 1-3/4" | CCWSE | 79103, 79104, E1014 |
| SS358 | 3.3" | 1/15 | 115 | 2.20 | 1550 | 3.32" | 5/16" x 3.20" | CWSE | 50011, E1008, E1052, E1055, E1058 |
| SS318 | 3.3" | 1/20 | 115 | 1.60 | 1550 | 2.85" | 5/16" x 2.80" | CCWSE | 79105, 5010S, E1007, E1057 |
| SS359 | 3.3" | 1/20 | 208 - 230 | 1.10 | 1550 | 3.35" | 5/16" x 3.20" | CWSE | 5008T, 503414, E1009, E1053, E1056, E1059 |
| SS300 | 3.3" | 1/25 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.50" | CWSE | E1068 |
| SS332 | 3.3" | 1/25 | 115 | 1.50 | 1550 | 2.59" | 5/16" x 1.50" | CCWSE | 79107, 5001F |
| SS130 | 3.3" | 1/45 | 230 | 0.80 | 1550 | 2.71" | 5/16" x 1.50" | CCWSE | 79106, 79108, 79113, 5001M |
| SS326 | 3.3" | 1/85 | 115 | 0.50 | 1550 | 1.90" | 1/4" x 1.45" | CCWSE | 79101, E1001, E1002, E1003 |
| SS302 | 3.3" | 1/100 | 240 | 0.30 | 1400 | 2.00" | 1/4" x 1.50" | CCWSE | E1004 |
| SS511 | 3.3" | 1/100 | 240 | 0.28 | 1350 | 2.10" | 1/4" x 2.00" | CCWSE | 79115 |
| SS739B ● | 5.5" | 1/4 | 208 - 230 | 1.70 | 825 | 4.25" | 1/2" x 6-1/2" | REV. | E1026 |
| RMT0062 ●* | 56Y | 1-1/2 | 575 | 2.50 | 860 | 10.50" | 5/8" x 2.50" | REV. | E5039 |

## Bohn / Larkin (Heatcraft)

SS605

SS9721

SS358 - SS359

SS574 - SS575

SS332

SS326

SS3729 - SS3730

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS605 | Skeleton | --- | 120 | 1.00 | 2800 | 7/8" | 3/16" x 1-3/4" | CCWSE | Vent Fan |
| SS9721 ●* | 3.3" | 1/12 | 115 / 208 - 230 | 1.10 / 0.60 | 1550 | 3.62" | 5/16" x 3.15" | REV. | 253-9101 |
| SS358 | 3.3" | 1/15 | 115 | 2.20 | 1550 | 3.32" | 5/16" x 3.20" | CWSE | 5001L, 8S, 4L |
| SS359 | 3.3" | 1/20 | 208 - 230 | 1.10 | 1550 | 3.35" | 5/16" x 3.20" | CWSE | 5009T, 5034M |
| SS574 | 3.3" | 1/20 | 115 | 1.90 | 1550 | 2.75" | 5/16" x 2.50" | CCWSE | 253-1194 |
| SS575 | 3.3" | 1/20 | 230 | 0.89 | 1550 | 2.75" | 5/16" x 2.50" | CCWSE | 253-1195 |
| SS332 | 3.3" | 1/25 | 115 | 1.50 | 1550 | 2.59" | 5/16" x 1.50" | CCWSE | 79107, 112, 5001F, 11S, 20F, 35F |
| SS326 | 3.3" | 1/85 | 115 | 0.50 | 1550 | 1.90" | 1/4" x 1.45" | CCWSE | 79101 |
| SS3729 ● | 5.5" | 1/3 | 208 - 230 | 2.70 | 1075 | 4.61" | 1/2" x 6.00" | REV. | 7.5 / 370 (Capacitor) |
| SS3730 ● | 5.5" | 1/2 | 208 - 230 | 3.50 | 1075 | 5.11" | 1/2" x 6.00" | REV. | 10 / 370 (Capacitor) |

(●) Ball Bearing
(*) Permanent Split Capacitor Design

## Broan

(also see Nutone)

30080058

99080481 - 99080482

99080483 - 99080484 - 99080485

99080486 - 99080487 - 99080488

SS324

16230

30080135

SS9316 - SS9317

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 30080058 | 3.3" | 1/100 | 115 | 0.61 | 1050 | 2-1/2" | 5/16" x 1-7/8" | CCWSE | 30080058, JA2C290, JA2C291 |
| 99080481 * | 3.3" | 1/200 | 120 | 0.43 | 648 | 2.73" | 3/8" x 3.25" | CCWSE | JA2R322 |
| 99080482 * | 3.3" | 1/70 | 120 | 0.56 | 745 | 2.87" | 3/8" x 3.00" | CCWSE | JA2R321 |
| 99080483 | 3.3" | 1/25 | 120 | 1.60 | 1550 | 4.37" | 3/8" x 1.45" | CCWSE | JA2Y043 |
| 99080484 | 3.3" | 1/20 | 120 | 2.00 | 1550 | 4.37" | 3/8" x 1.45" | CCWSE | JA2Y045 |
| 99080485 | 3.3 | 1/20 | 120 | 2.60 | 1550 | 4.37" | 3/8" x 1.45" | CCWSE | JA2Y044 |
| 99080486 | 3.3" | 1/20 | 120 | 0.90 | 1625 | 4.44" | 3.98" x 3/8" x 3.98" | CWLE | JE2G095 |
| 99080487 ~* | 3.3" | 1/12 | 120 | 2.00 | 1625 | 4.09" | 4.14" x 3/8" x 4.14" | CWLE | JE2J051, JE2J066 |
| 99080488 ~* | 3.3" | 1/7 | 120 | 2.70 | 1625 | 4.09" | 4.14" x 3/8" x 4.14" | CWLE | JE2J052 |
| SS324 | 3.3" | 1/25 | 115 | 2.10 | 1550 | 2.92" | 1.95" x 5/16" x 1.95" | CWLE | 99080151, 99080152, 30080059, 30080060 |
| 16230 • | 4.1" | 1/8 | 115 | 3.40 | 1550 | 4.65" | 3/8" x 2.40" | CWSE | CB2J088 |
| 30080135 * | 4.4" | 1/10 | 120 | 1.80 | 1050 | 3-1/2" | 1/2" x 2-3/8" | CWSE | 30080135 |
| SS9316 | 5.0" | --- | 115 | 3.40 | 1100 | 2-1/4" | 1/2" x 3.00" | CWSE | 97009316 |
| SS9317 | 5.0" | --- | 115 | 4.30 | 1100 | 2-5/8" | 1/2" x 2-5/8" | CWSE | 97009317, 99080267 |

## Caloritech

SS303

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS303 • | 3.3" | 1/25 | 115 | 1.50 | 1550 | 3.70" | 5/16" x 3.30" | CWSE | Electric Heaters |

## Camco

SS510

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS510 | 3.3" | 1/50 | 115 | 1.16 | 1250/3 | 2.12" | 1.10" x 1/4" x 1.50" | CWLE | Humidifier |



(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

## Canarm / Pleasantaire

P1000-B4

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| P1000-B4 ● | 3.3" | 1/20 | 115 | 1.70 | 1600/2 | 2.87" | 5/16" x 1.75" | CWSE | S8-B2, S10-B2 |

## Cancoil Thermal

MA1074

| Stock # | Frame | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments |
|---|---|---|---|---|---|---|---|---|---|
| MA1074 ● | 56Y | 2 | 575 | 3.10 | 1140 | 10" | 5/8" x 3.00" | REV. | Rigid Base - TEAO |

## Carrier

UFM653

UFM3714

5BD1106

HD60FE575

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UFM653 ● | 3.3" | 1/12 | 230 / 460 | 1.20 / 0.60 | 3000 | 6-3/4" | 1/4" x 2.25" | CCWSE | 4653 |
| UFM3714 ●* | 3.3" | 1/8 | 115 / 230 | 1.60 / 0.80 | 3200 | 7-1/8" | 1/4" x 4.00" | REV. | HC30GB231A |
| HD60FE575 ● | 6.5" | 5 | 575 - 3Ø | 5.60 | 1725 | 13.00" | 7/8" x 3-1/4" | REV. | HD60FE575 |
| 5BD1106 ●* | 5.5" | 1 | 575 - 1Ø | 2.40 | 1075/2 | 6.50" | 1/2" x 5.00" | REV. | F1575DD, 50HJ900575, 88C7601, X70671181-017, X70671479-001, 50HJ900575 |

## CGE

SS230

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments |
|---|---|---|---|---|---|---|---|---|---|
| SS230 | 3.3" | 1/70 | 115 | 0.66 | 2800 | 2.33" | 1/4" x 1.25" | CWSE | 12" Leads |

(●) Ball Bearing
(*) Permanent Split Capacitor Design

## Chromalox (Dimplex)

SS3670

SS611

SS617 - SS635

SS210 - SS217

SS213

SS212B - SS212S - SS215

SS480

G018

J011

E004 - F006

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS3670 | Skeleton | --- | 120 / 240 | 0.40 / 0.26 | 3000 | 1.76" | 3/16" x 1.50" | CWSE | Heater |
| SS611 | Skeleton | --- | 120 | 0.60 | 1500 | 1.60" | 3/16" x 1.65" | CCWSE | Heater |
| SS617 | Skeleton | --- | 208 - 240 | 0.22 | 1900 | 1.47" | 3/16" x 1.30" | CWSE | 04290-004 |
| SS635 | Skeleton | --- | 208 - 240 | 1.20 | 1550 | 2.64" | 1/4" x 1.50" | CCWSE | Heater |
| SS210 | 3.3" | 1/50 | 230 | 0.40 | 1550 | 2.30" | 1/4" x 1.56" | CWSE | 2868-407-128, 2868-405-168, 2868-405-131 |
| SS213 | 3.3" | 1/25 | 115 | 1.40 | 1550 | 3.10" | 5/16" x 1.78" | CWSE | 2868-507-125, 2868-511-020 |
| SS215 | 3.3" | 1/300 | 240 | 0.24 | 1200 | 2.22" | 5/16" x 2.25" | CWSE | 2868-505-016, 085 |
| SS217 | 3.3" | 1/40 | 240 | 0.50 | 1550 | 2.34" | 1/4" x 1.56" | CCWSE | 2868-407-130 |
| SS212B • | 3.3" | 1/35 | 240 | 0.55 | 1550 | 2.84" | 5/16" x 3.50" | CWSE | 2868-405, 23405, 23388 |
| SS212S | 3.3" | 1/30 | 240 | 0.55 | 1550 | 2.80" | 5/16" x 3.54" | CWSE | 2868-405, 23405, 23388 |
| SS480 | 3.3" | 1/30 | 208 - 240 | 0.80 | 1500 | 4.05" | 3/8" x 2.38" | CWSE | 2868-511-105 |
| G018 • | 5.0" | 1/10 | 600 | 0.64 | 1550 | 4.00" | 1/2" x 7.23" | CWSE | 01520-003, 01520-007 |
| J011 • | 5.0" | 1/10 | 600 | 0.83 | 1550 | 4.00" | 1/2" x 7.23" | CWSE | 01520-115 |
| E004 • | 5.5" | 1/6 | 575 - 3Ø | 0.30 | 1140 | 3.80" | 1/2" x 4.60" | REV. | 03167-007 |
| F006 • | 5.5" | 1/6 | 575 - 3Ø | 0.30 | 1725 | 4.80" | 1/2" x 4.60" | REV. | 01520-020 |

## Coldstream

SS122 - SS137

SS230

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS122 | 3.3" | 1/60 | 230 | 0.35 | 1550 | 2.50" | Hubless | CCWSE | Refrigeration Cases |
| SS137 | 3.3" | 1/70 | 115 | 0.59 | 1550 | 2.25" | Hubless | CCWSE | Refrigeration Cases |
| SS230 | 3.3" | 1/70 | 115 | 0.66 | 2800 | 2.33" | 1/4" x 1.25" | CWSE | Refrigeration Cases |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Drolet

UB33

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB33 | Blower | 1/50 | 115 | 0.88 | 3200 | 6-3/4" | ---- | 100 | RB33, Wood & Pellet Stove |

## Dundas Foundry

UFB500

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UFB500 | Blower | 1/33 | 115 | 1.10 | 2860 | 6.00" | ---- | 140 | 4C442, RFB500 |

## Dunham Bush

SS124 - SS125

SS9428

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS124 • | 3.3" | 1/20 | 115 | 1.55 | 1550 | 2.80" | Hubless | CWSE | 350044, 350046, MM2847 |
| SS125 • | 3.3" | 1/20 | 230 | 0.80 | 1550 | 2.80" | Hubless | CWSE | 350043, 350045, MM2848 |
| SS9428 | 5.5" | 1 | 575-3Ø | 1.70 | 1100 | 7.50" | 1/2" x 2.75" | REV. | 142935, HM3T007, 010 |

## Elmira

UB200T-2

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB200T-2 | Blower | 1/100 | 120 | 0.60 | 1600 | 14.96" | 5/16" x 3.25" | 200 | 2812-681-002, RB200T-2 |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Electrohome

UB1

UB3

UB4

UB5

SS324

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C"/"A" | Shaft | CFM/Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB1 | Blower | 1/30 | 115 | 1.20 | 2700 | 8-1/2" | ---- | 200 | EB1 |
| UB3 | Blower | 1/50 | 120 | 0.80 | 3000 | 5-1/2" | ---- | 100 | EB3 |
| UB4 • | Blower | 1/40 | 120 | 0.88 | 3000 | 5.58" | ---- | 100 | EB4 |
| UB5 | Blower | 1/125 | 115 | 0.40 | 1550 | 4.94" | ---- | 50 | EB5 |
| SS324 | 3.3" | 1/25 | 115 | 2.10 | 1550 | 2.92" | 1.95" x 5/16" x 1.95" | CWLE | 2568-511-098 |

## Enterprise Foundry

SS401

SS403

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS401 | 3.3" | 1/150 | 115 | 0.40 | 1600 | 2.10" | 1/4" x 1.60" | CWSE | Heaters |
| SS403 | 3.3" | 1/125 | 115 | 0.40 | 1550 | 2.77" | 1/4" x 1.25" | CCWSE | Heaters |

## Fasco
(Blowers)

UB3

UB5

UB160

UB265

UB465

UFB500

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB3 | Blower | 1/50 | 120 | 0.80 | 3000 | 5-1/2" | ---- | 100 | B24220 |
| UB5 | Blower | 1/125 | 115 | 0.40 | 1550 | 4.94" | ---- | 50 | B30 |
| UB160 | Blower | 1/33 | 120 | 1.10 | 1550 | 6.50" | ---- | 160 | 50755-D500 |
| UB265 | Blower | 1/25 | 115 | 1.40 | 1550 | 7.00" | ---- | 265 | B45227 |
| UB465 | Blower | 1/15 | 115 | 2.60 | 1550 | 10-1/2" | ---- | 465 | B45267 |
| UFB500 | Blower | 1/33 | 115 | 1.10 | 2860 | 6.00" | ---- | 140 | 850752-D500 |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Fasco

SS3103

SS212B

SS213

SS356 - SS357- SS368 - SS369

SS359

SS370 - SS371

SS409 - SS510

SS440

UFM410

SS174

SS2658

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS3103 | Skeleton | ---- | 120 | 0.81 | 3000 | 0.75" | 7/32" x 2-7/16" | CCWSE | K109 |
| SS212B ● | 3.3" | 1/35 | 230 | 0.55 | 1550 | 2.80" | 5/16" x 3.50" | CWSE | D1118 |
| SS213 | 3.3" | 1/25 | 115 | 1.40 | 1550 | 3.10" | 5/16" x 1.78" | CWSE | D184 |
| SS356 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CWSE | D132 |
| SS357 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CCWSE | D133 |
| SS359 | 3.3" | 1/20 | 208 - 230 | 1.10 | 1550 | 3.35" | 5/16" x 3.20" | CWSE | D1126 |
| SS368 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.88" | 5/16" x 2.80" | CCWSE | D1101 |
| SS369 | 3.3" | 1/20 | 208 - 230 | 0.95 | 1550 | 2.82" | 5/16" x 2.75" | CCWSE | D1103 |
| SS370 ●* | 3.3" | 1/20 | 115 | 0.77 | 1550 | 4.10" | 5/16" x 2.71" | CCWSE | D1243 |
| SS371 ●* | 3.3" | 1/20 | 230 | 0.37 | 1550 | 4.10" | 5/16" x 2.71" | CWSE | D1245 |
| SS409 | 3.3" | 1/50 | 115 | 1.30 | 1550 | 2.12" | 5/16" x 1.60" | CWSE | D126 |
| SS440 ~ | 3.3" | 1/20 | 120 | 1.60 | 1550 | 3.16" | 3.80" x 5/16" x 3.80" | CWLE | D1163 |
| SS510 ~ | 3.3" | 1/50 | 120 | 1.10 | 1250 | 2.12" | 1.19" x 1/4" x 1.53" | CWLE | D1134 |
| UFM410 ●* | 3.3" | 1/10 | 115 / 230 | 1.40 / 0.70 | 3000 | 7.12" | 1/4" x 3.75" | REV. | D410 |
| SS174 | 4.1" | 1/10 | 115 | 3.40 | 1450 | 3.25" | 3/8" x 3.20" | CWSE | D174 |
| SS2658 | 4.1" | 1/15 | 115 | 2.30 | 1550 | 3.42" | 3/8" x 2.44" | CCWSE | D1246 |

## Federal Pioneer

SS217 - SS210 - SS511

SS408

S302

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Comments |
|---|---|---|---|---|---|---|---|---|---|
| SS217 | 3.3" | 1/40 | 240 | 0.50 | 1550 | 2.30" | 1/4" x 1.60" | CCWSE | L82116A4 |
| SS210 | 3.3" | 1/50 | 230 | 0.40 | 1550 | 2.30" | 1/4" x 1.50" | CWSE | Electric Heater |
| SS408 ~ | 3.3" | 1/80 | 115 | 0.60 | 1550 | 2.20" | 1.60" x 1/4" x 1.60" | CCWLE | Electric Heater |
| SS511 | 3.3" | 1/100 | 240 | 0.28 | 1350 | 2.10" | 1/4" x 2.00" | CCWSE | Electric Heater |
| SS302 | 3.3" | 1/100 | 240 | 0.30 | 1400 | 2.00" | 1/4" x 1.50" | CCWSE | L81512W1 |

(●) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

## Foster

SS605

SS119 - SS120

SS127

SS101 - SS103 -SS122

SS101L - SS103L

SS124 - SS125

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS605 | Skeleton | --- | 120 | 1.00 | 2800 | 5/8" | 3/16" x 1-3/4" | CCWSE | 366864 |
| SS120 | 3.3" | 1/70 | 115 | 0.63 | 1550 | 2.25" | Hubless | CCWSE | Refrigeration Cases |
| SS119 | 3.3" | 1/70 | 115 | 0.70 | 1550 | 2.22" | Hubless | CWSE | Refrigeration Cases |
| SS127 | 3.3" | 1/80 | 115 | 0.75 | 1600 | 2.00" | Hubless | CWSE | Refrigeration Cases |
| SS101 | 3.3" | 1/45 | 115 | 0.90 | 1550 | 2.34" | Hubless | CCWSE | Refrigeration Cases |
| SS101L | 3.3" | 1/45 | 115 | 0.90 | 1550 | 2.34" | Hubless | CCWSE | Refrigeration Cases |
| SS103 | 3.3" | 1/45 | 115 | 0.90 | 1550 | 2.36" | Hubless | CWSE | Refrigeration Cases |
| SS103L | 3.3" | 1/45 | 115 | 0.90 | 1550 | 2.34" | Hubless | CWSE | Refrigeration Cases |
| SS124 • | 3.3" | 1/20 | 115 | 1.55 | 1550 | 2.80" | Hubless | CWSE | Refrigeration Cases |
| SS122 | 3.3" | 1/60 | 230 | 0.35 | 1550 | 2.50" | Hubless | CCWSE | Refrigeration Cases |
| SS125 • | 3.3" | 1/20 | 230 | 0.80 | 1550 | 2.80" | Hubless | CWSE | Refrigeration Cases |

## Franklin

UB1

UB4

UB5

UB160

UB265

UB465

SS008

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C"/"A" | Shaft | CFM/Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB1 | Blower | 1/30 | 115 | 1.20 | 2700 | 8.30" | ---- | 140 | 76001 |
| UB4 | Blower | 1/40 | 120 | 0.88 | 3000 | 5-1/2" | ---- | 100 | 76004, 80042 |
| UB5 | Blower | 1/125 | 115 | 0.40 | 1550 | 4.94" | ---- | 50 | B30, 76005, 80239 |
| UB160 | Blower | 1/33 | 120 | 1.10 | 1550 | 6.59" | ---- | 160 | 50755-D500, 80611 |
| UB265 | Blower | 1/25 | 115 | 1.40 | 1550 | 7.00" | ---- | 265 | B45227, 80224, 8214117524 |
| UB465 | Blower | 1/15 | 115 | 2.60 | 1550 | 10-1/2" | ---- | 465 | B45267 |
| SS008 • | 4.1" | 1/12 | 230 | 1.30 | 1550 | 3.94" | 3/8" x 1.82" | CCWSE | 75008 |

## General Purpose
(Blowers)

UB1

UB3

UB160

UB265

UB465

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB1 | Blower | 1/30 | 115 | 1.10 | 2860 | 6.00" | ---- | 140 | RB1, B24220 |
| UB3 | Blower | 1/50 | 120 | 0.80 | 3000 | 5.42" | ---- | 100 | RB3, B30 |
| UB160 | Blower | 1/33 | 115 | 1.10 | 1550 | 5.00" | ---- | 160 | RB160, 50755-D500 |
| UB265 | Blower | 1/25 | 115 | 1.40 | 1500 | 7.00" | ---- | 265 | RB265, B45227 |
| UB465 | Blower | 1/15 | 115 | 2.60 | 1550 | 10-1/2" | ---- | 465 | RB465, B45267 |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## General Purpose

SS208

SS409

SS356 - SS357

UFM78

UFM653

UFM3714

SS958

SS2398

SS2930 - SS2932 - SS2940 - SS2942

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS208 | 3.3" | 1/40 | 115 | 1.20 | 1550 | 2.50" | 5/16" x 1.95" | CCWSE | R208 |
| SS409 | 3.3" | 1/50 | 115 | 1.30 | 1550 | 2.12" | 5/16" x 1.56" | CWSE | R409, D126 |
| SS356 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CWSE | R356, D132 |
| SS357 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.59" | 5/16" x 2.30" | CCWSE | R357, D133 |
| UFM78 •* | 3.3" | 1/10 | 115 / 230 | 1.30 / 0.70 | 3200 | 4-1/8" | 5/16" x 3.25" | REV. | RFM78 |
| UFM653 • | 3.3" | 1/12 | 230 / 460 | 1.20 / 0.60 | 3000 | 6-3/4" | 1/4" x 2.25" | CCWSE | RFM653 |
| UFM3714 •* | 3.3" | 1/8 | 115 / 230 | 1.60 / 0.80 | 3200 | 7-1/8" | 1/4" x 4.00" | REV. | RFM3714 |
| SS958 | 4.1" | 1/8 | 115 | 3.80 | 1550 | 3.94" | 3/8" x 2.44" | CWSE | R2390 |
| SS2398 | 5.0" | 1/8 | 115 | 5.00 | 1050 | 3.87" | 1/2" x 3.75" | CWSE | R2398 |
| SS2930 | 5.0" | 1/10 | 115 / 230 | 4.10 / 2.00 | 1050 | 3.87" | 3/8" x 2.80" | CWSE | R2930 |
| SS2932 | 5.0" | 1/10 | 115 / 208-230 | 5.00 / 2.50 | 1550 | 3.87" | 3/8" x 2.80" | CCWSE | R2932 |
| SS2940 | 5.0" | 1/10 | 115 / 230 | 4.10 / 2.00 | 1050 | 3.87" | 3/8" x 2.80" | CCWSE | R2940 |
| SS2942 | 5.0" | 1/10 | 115 / 208-230 | 5.00 / 2.50 | 1550 | 3.87" | 3/8" x 2.80" | CWSE | R2942 |

## Grainger (Dayton)

UB160

UB265

UB465

SS262

SS356

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C"/"A" | Shaft | CFM/Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB160 | Blower | 1/33 | 115 | 1.10 | 1550 | 6-3/4" | ---- | 160 | 4C458, 50755-D500 |
| UB265 | Blower | 1/25 | 115 | 1.40 | 1500 | 7.00" | ---- | 265 | 4C447, B45227 |
| UB465 | Blower | 1/15 | 115 | 2.60 | 1550/2 | 10-1/2" | ---- | 465 | 4C448, B45267 |
| SS262 | 3.3" | 1/40 | 115 | 1.10 | 1550 | 2.34" | 5/16" x 1.50" | CCWSE | 3M723 |
| SS356 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.32" | 5/16" x 2.30" | CWSE | 3M547 |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Greenheck

SS8318

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS8318 | 5.0" | 1/8 | 115 | 2.60 | 1550 | 3.50" | 1/2" x 2-3/4" | CCWSE | 308318 |

## Greenhouse Blowers

UB160

UB265

UB465

UFB500

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB160 | Blower | 1/33 | 120 | 1.10 | 1550 | 6.59" | ---- | 160 | 50755-D500 |
| UB265 | Blower | 1/25 | 115 | 1.40 | 1550 | 7.00" | ---- | 265 | B45227 |
| UB465 | Blower | 1/15 | 115 | 2.60 | 1550 | 10-1/2" | ---- | 465 | B45267 |
| UFB500 | Blower | 1/33 | 115 | 1.10 | 2860 | 6.00" | ---- | 140 | 4C442, RFB500 |

## Heat & Glow

UB168

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB168 | Blower | ---- | 115 | 1.00 | 3000 | 12-3/8" | ---- | 168 | GFK-160A, 7002-1241 |

## Heritage

UB33

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB33 | Blower | 1/50 | 115 | 0.88 | 3200 | 6-3/4" | ---- | 100 | Wood Stove |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Hunter

SS108

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS108 | 3.3" | 1/100 | 115 | 0.60 | 1550 | 2.00" | Hubless | CWSE | 2-SR |

## Hussmann

SS34201 J055 F062

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS34201 ●* | 5.0" | 1/5 | 575 - 1Ø | 0.50 | 1075 | 4.50" | 1/2" x 3.30" | CCWSE | 1042140, 204201, R34201, R30575 |
| J055 ●* | 5.5" | 1/6 | 575 - 1Ø | 0.80 | 1650 | 4.32" | 1/2" x 3.20" | REV. | 77238, 1042140, R30575 |
| F062 ● | 5.5" | 1/20 | 600 - 1Ø | 0.42 | 1550 | 4.00" | 1/2" x 2.58" | CWSE | 206578, DA2F062, DA2F091 |

## Ideal

SS611 SS108 - SS123

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS611 | Skeleton | 1/50 | 115 | 1.30 | 1550 | 2.20" | 3/16" x 1.65" | CWSE | Evaporator Motor |
| SS108 | 3.3" | 1/100 | 115 | 0.60 | 1550 | 2.00" | Hubless | CWSE | Evaporator Motor |
| SS123 | 3.3" | 1/70 | 115 | 0.60 | 1550 | 2.59" | Hubless | CCWSE | Evaporator Motor |

## Intercity

SS2609 - SS2612

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS2609 | 4.1" | 1/30 | 115 | 1.21 | 1550 | 2.94" | 1/2" x 2.38" | CCWSE | UE009 |
| SS2612 | 4.1" | 1/30 | 115 | 1.21 | 1550 | 2.94" | 1/2" x 2.38" | CWSE | UE010 |

(●) Ball Bearing
(*) Permanent Split Capacitor Design

## Keeprite

SS205

SS307

SS360

SS370 - SS371

SS2657 - SS2658

SS2269

E015

J055

G004

5BD1076

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS205 | 3.3" | 1/37 | 115 | 1.20 | 1575 | 2.75" | 1/4" x 1.70" | CCWSE | 11796-8, R205 |
| SS307 | 3.3" | 1/25 | 115 | 1.45 | 3000 | 3.30" | 1/4" x 1.30" | CWSE | 85680 |
| SS360 | 3.3" | 1/35 | 115 | 1.20 | 1550 | 2.50" | 1/4" x 1.60" | CCWSE | 50424, 1043291 |
| SS370 •* | 3.3" | 1/20 | 115 | 0.77 | 1550 | 4.10" | 5/16" x 2.71" | CCWSE | 501898, 501899, 505124 |
| SS371 •* | 3.3" | 1/20 | 230 | 0.36 | 1550 | 4.10" | 5/16" x 2.71" | CCWSE | 501908, 501909, 505125 |
| SS2658 | 4.1" | 1/15 | 115 | 2.30 | 1550 | 3.42" | 3/8" x 2.42" | CCWSE | 81356 |
| SS2657 | 4.1" | 1/15 | 230 | 1.20 | 1550 | 3.42" | 3/8" x 2.42" | CCWSE | 81335 |
| SS2269 | 5.0" | 1/15 | 115 | 2.70 | 1050 | 2.97" | 1/2" x 3.00" | CWSE | 160269 |
| E015 | 5.5" | 1/20 | 230 | 0.89 | 1050/3 | 3.44" | 1/2" x 2.38" | CCWSE | 130784 |
| J055 •* | 5.5" | 1/6 | 575 - 1Ø | 0.80 | 1650 | 4.32" | 1/2" x 3.20" | REV. | 1042140 |
| G004 • | 5.5" | 1/4 | 575 - 3Ø | 0.46 | 1100 | 6.00" | 5/8" x 3.00" | REV. | 171065 |
| 5BD1076 • | 5.5" | 3/4 | 575 - 1Ø | 2.30 | 1075/2 | 6.30" | 4-1/2" x 5.00" | REV. | HQ1095096 |

## Krack (Hussmann)

SS313

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS313 • | 3.3" | 1/15 | 115 | 2.20 | 1550 | 3.58" | 5/16" x 3.00" | CWSE | E206444 |

## Larkin (See Bohn)



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Lau

SS408

SS413

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS408 ~ | 3.3" | 1/80 | 115 | 0.60 | 1550 | 2.20" | 1.60" x 1/4" x 1.60" | CCWLE | 421306-01 |
| SS413 ~ | 3.3" | 1/35 | 120 | 1.10 | 3000 | 3.00" | 2.25" x 1/4" x 2.50" | CCWLE | 421532-02 |

## Lear (Siegler)

SS108

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS108 | 3.3" | 1/100 | 115 | 0.60 | 1550 | 2.00" | Hubless | CWSE | Furnace |

## Leigh

SS220

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS220 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.84" | 5/16" x 1.22" | CWSE | 16603, 97721 |

## Luxaire (See York)

(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

## Lomanco

SS2497

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS2497 | 5.0" | 1/10 | 115 | 3.40 | 1100 | 2.25" | 1/2" x 1-5/8" | CWSE | A0510B2497, A0416B2059 A0510B2389 |

## Loren Cook

SS2224 - SS3234 - SS4200

SS5200



SS6264 - SS7274

C06E2A

C07E4A

C09E4A

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS2224 | 4.4" | 1/114 | 115 | 0.75 | 1500 | 2-3/8" | 3/8" x 2-3/4" | CWSE | 220/240, 615053 |
| SS3234 | 4.4" | 1/16 | 115 | 2.20 | 1550 | 2-5/8" | 3/8" x 2-1/2" | CWSE | 320/340, 615054 |
| SS4200 | 4.4" | 1/23 | 115 | 1.50 | 1500 | 2-5/8" | 3/8" x 2-3/4" | CWSE | 420, 615055 |
| SS6264 | 4.4" | 1/11 | 115 | 4.60 | 1500 | 3.00" | 1/2" x 6-1/4" | CWSE | 620/640, 615057 |
| SS5200 * | 5.0" | 1/16 | 115 | 1.50 | 1200 | 3.00" | 3/8" x 2-1/4" | CWSE | 520, 615056 |
| SS7274 * | 5.0" | 1/4 | 115 | 3.90 | 1625 | 3 3/8" | 1/2" x 6-1/4" | CWSE | 720/740, 615058 |
| C06E2A * | 5.5" | 1/8 | 115 | 1.40 | 1600 | 3.53" | 1/2" x 3.00" | CWSE | C03E2A, CK48HC21P87, 100133 |
| C07E4A * | 5.5" | 1/6 | 115 | 1.80 | 1100 | 3.83" | 1/2" x 3.43" | CWSE | 100170, K55HXDRT-498 CK48HCZ1M75 |
| C09E4A * | 5.5" | 1/3 | 115 | 4.80 | 1080 | 5.00" | 1/2" x 3.00" | CWSE | 100172, CK48HC21589 |

## Markhot

SS133

SS350

J020

G156

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS133 | 3.3" | 1/30 | 115 | 1.10 | 1550 | 2.63" | Hubless | CWSE | 5DH1A1-P456 |
| SS350 | 3.3" | --- | 115 | 1.20 | 1050 | 2.89" | 5/16 x 1.50" | CCWSE | 5AA1A3-P4S |
| G156 | 4.1" | 1/20 | 115 | 2.10 | 1550 | 3.27" | 5/16" x 3.20" | CWSE | 8424015054 |
| J020 | 5.0" | 1/10 | 115 | 2.70 | 1550 | 3.88" | 1/2" x 3.50" | CWSE | Unit Heater |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Miami-Carey

SS610

SS203 - SS206 - SS207

SS209 - SS214 - SS220

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS610 | Skeleton | --- | 120 | 1.20 | 2400/2 | 7/8" | 7/32" x 1-3/16" | CCWSE | 1V4217 |
| SS203 | 3.3" | 1/70 | 115 | 0.90 | 1600 | 2.10" | 1/4" x 1.50" | CWSE | 1V2430 |
| SS206 | 3.3" | 1/100 | 115 | 0.56 | 1550 | 2.10" | 1/4" x 1.52" | CCWSE | Vent Fan |
| SS207 | 3.3" | 1/80 | 115 | 0.80 | 1600 | 2.00" | 1/4" x 1.50" | CCWSE | Vent Fan |
| SS209 | 3.3" | 1/50 | 115 | 0.85 | 1550 | 2.30" | 1/4" x 1.60" | CCWSE | 1V3117, 39328 |
| SS214 | 3.3" | 1/40 | 115 | 0.80 | 2700 | 2.87" | 1/4" x 1.45" | CCWSE | Vent Fan |
| SS220 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.87" | 5/16" x 1.30" | CWSE | 1V2429 |

## Newmac

UB33

SS403

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C"/"A" | Shaft | CFM/Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB33 | Blower | 1/50 | 115 | 0.88 | 3200 | 6-3/4" | ---- | 100 | 2040001 |
| SS403 | 3.3" | 1/125 | 115 | 0.40 | 1550 | 2.78" | 1/4" x 1.25" | CCWSE | 7017011 |

## Nordica

UB3

UB33

| Stock # | Diameter | HP | Volts | Amps. | RPM | "C" | Shaft | CFM | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UB3 | Blower | 1/50 | 120 | 0.80 | 3000 | 5-1/2" | ---- | 100 | B24220 |
| UB33 | Blower | 1/50 | 115 | 0.88 | 3200 | 6-3/4" | ---- | 100 | Diamond & Furnace Variable Speed |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Nutone
(also see Broan)

SS601 - SS603 - SS613

SS604 - SS611 - SS3103

SS605 - SS610

SS3100

SS3101

SS3670

SS201 - SS202 - SS203
SS207 - SS506 - SS232

SS209 - SS214 - SS219
SS801

SS304 - SS305

SS307

SS311 - SS315 - SS355

SS440

SS467

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS601 | Skeleton | --- | 120 | 0.75 | 3000 | 1.89" | 1/4" x 2-5/16" | CCWSE | 30070007, 162 |
| SS603 | Skeleton | --- | 120 | 0.63 | 2400 | 1.72" | 7/32" x 2-1/8" | CCWSE | 81096, 81795, 81826, 81827, 81993, 81994, K2230 |
| SS604 | Skeleton | --- | 120 | 0.78 | 2700 | 1.72" | 3/16" x 1.26" | CCWSE | 81058 |
| SS605 | Skeleton | --- | 120 | 1.00 | 2800 | 1.97" | 3/16" x 1.74" | CCWSE | Vent Fan |
| SS610 | Skeleton | --- | 120 | 1.20 | 2400/2 | 1.97" | 7/32" x 1.21" | CCWSE | 300990011, 12, 51000 |
| SS611 | Skeleton | --- | 120 | 0.60 | 1500 | 0.60" | 3/16" x 1.65" | CCWSE | 3008001 |
| SS613 | Skeleton | --- | 120 | 0.56 | 1600 | 1.72" | 7/32" x 2.50" | CCWSE | 64620 |
| SS3100 | Skeleton | --- | 115 | 0.59 | 3000 | 1.72" | 7/32" x 1-11/16" | CCWSE | C-65878 |
| SS3101 | Skeleton | --- | 120 | 0.70 | 3000/2 | 2.10" | 7/32" x 1-15/16" | CWSE | C-52736, C-27987 |
| SS3103 | Skeleton | --- | 120 | 0.81 | 3000 | 1.85" | 7/32" x 2-7/16" | CCWSE | C-63676, C-68626, 27 |
| SS3670 | Skeleton | --- | 120 / 240 | 0.40 / 0.26 | 3000 | 1.76" | 3/16" x 1-9/16" | CWSE | Vent Fan Kit |
| SS201 | 3.3" | 1/50 | 115 | 0.90 | 1430 | 2.12" | 1/4" x 2.20" | CCWSE | 18692 |
| SS202 | 3.3" | 1/40 | 115 | 1.00 | 1550 | 2.47" | 1/4" x 1.30" | CCWSE | 2868-407, 409,076, 82879 |
| SS203 | 3.3" | 1/70 | 115 | 0.90 | 1600 | 2.09" | 1/4" x 1.56" | CWSE | Vent Fan |
| SS207 | 3.3" | 1/80 | 115 | 0.80 | 1600 | 2.00" | 1/4" x 1.56" | CCWSE | 2868-405, 23405, 23388 |
| SS209 | 3.3" | 1/50 | 115 | 0.85 | 1550 | 2.34" | 1/4" x 1.56" | CCWSE | 80230, 80469 |
| SS214 | 3.3" | 1/40 | 115 | 0.80 | 2700 | 2.83" | 1/4" x 1.45" | CCWSE | Vent Fan |
| SS219 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.84" | 5/16" x 2.20" | CCWSE | 80405, 80747 |
| SS232 | 3.3" | 1/70 | 120 | 0.70 | 2800 | 2.56" | 1/4" x 1.28" | CWSE | 80215, 80675, 26733 |
| SS304 | 3.3" | 1/40 | 115 | 0.89 | 1550 | 2.47" | 1/4" x 1.60" | CCWSE | Vent Fan |
| SS305 | 3.3" | 1/50 | 115 | 1.00 | 2800 | 2.33" | 1/4" x 1.50" | CCWSE | 80695 |
| SS307 | 3.3" | 1/25 | 115 | 1.45 | 3000 | 3.30" | 1/4" x 1.26" | CWSE | 85680 |
| SS311 | 3.3" | 1/100 | 115 | 0.65 | 1550 | 2.10" | 1/4" x 1.20" | CCWSE | 2868-505-022 |
| SS315 | 3.3" | 1/100 | 120 | 0.50 | 1550 | 2.09" | 1/4" x 1.20" | CWSE | 2868-507-098 |
| SS355 • | 3.3" | 1/15 | 115 | 2.20 | 1550 | 3.10" | 5/16" x 1.90" | CCWSE | 81918 |
| SS440 ~ | 3.3" | 1/20 | 120 | 1.60 | 1550 | 3.16" | 3.80" x 5/16" x 3.80" | CWLE | 81905, 80734, 26757 |
| SS467 ~ | 3.3" | 1/20 | 120 | 1.40 | 1550 | 3.10" | 1.70" x 5/16" x 1.70" | CWLE | 30080059, 30080060 |
| SS506 | 3.3" | 1/140 | 115 | 0.50 | 1400 | 1.87" | 1/4" x 2.00" | CCWSE | 2868-402-001, 004 |
| SS801 | 3.3" | 1/45 | 115 | 0.90 | 1550 | 2.25" | 5/16" x 1.87" | CCWSE | 118013, 18692, 26754, 80101, 80469 |



(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

## Nutech

SS2655

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS2655 ●*~ | 5.5" | 1/12 | 120 | 1.34 | 1550 | 3.16" | 2.82" x 3/8" x 2.82" | CCWLE | A0812B2355 |

## Ouellet

SS212S - MO-019

SS217

MO-020

MO-022

E004

F026

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS212S | 3.3" | 1/35 | 230 | 0.55 | 1550 | 2.80" | 5/16" x 3.50" | CWSE | MOT03 |
| SS217 | 3.3" | 1/40 | 230 | 0.50 | 1550 | 2.30" | 1/4" x 1.50" | CCWSE | MOT04 |
| MO-019 | 3.3" | 1/25 | 240 | 0.70 | 1550 | 2.75" | 5/16" x 3.50" | CWSE | JA2P265 |
| MO-020 ● | 3.3" | 1/30 | 240 | 0.64 | 1550 | 2.88" | 5/16" x 1.50" | CCWSE | JB2P080 |
| MO-022 ● | 5.5" | 1/3 | 575 - 3Ø | 0.68 | 1140 | 6.37" | 1/2" x 4.56" | REV. | 12348-001 |
| E004 ● | 5.5" | 1/6 | 575 - 3Ø | 0.30 | 1140 | 3.80" | 1/2" x 4.60" | REV. | 3J124HAX |
| F026 ● | 5.5" | 1/3 | 480 / 575 -1Ø | 0.90 | 1725 | 4.32" | 1/2" x 4.13" | CWSE | PCA1800-61-1, MOT07 |

## Penn Ventilator (Zephyr)

(Continued on Page 35)

56342 - 56343

56344

56345

56346

56347

56348

60024 - 60030

60076 - 63699

63745 - 63746

63747 - 63748

63749

63750

63751 - 63752

63821

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 56342 | 3.3" | 1/70 | 115 | 1.00 / 0.50 | 1550/2 | 2.46" | 3/8" x 5-1/2" | CWSE | 56342-0 |
| 56343 | 3.3" | 0.27 | 115 | 1.32 | 1550/2 | 2.46" | 3/8" x 5-3/4" | CWSE | 56343-0, JA2M414 |
| 56344 ●* | 3.3" | 0.08 | 115 | 1.60 / 1.00 | 1550/2 | 4.11" | 3/8" x 4.75" | CWSE | 56344-0, JE2H047 |
| 56345 * | 3.3" | 1/25 | 115 | 1.00 | 1050 | 4.80" | 3/8" x 4.75" | CWSE | 56345-0 |
| 56346 ●* | 3.3" | 0.27 | 115 | 3.20 / 1.90 | 1550/2 | 4.62" | 3/8" x 5.50" | CWSE | 56346-0, JE2K007 |
| 56347 ~* | 3.3" | 1/12 | 115 | 1.60 | 1050 | 4.14" | 6.10" x 3/8" x 6.10" | CCWLE | 56347-0 |
| 56348 ~ | 5.0" | 1/10 | 115 | 3.90 | 1050 | 3.62" | 6-1/4" x 1/2" x 6-1/4" | CCWLE | 56348-0 |
| 60024 | 3.3" | 1/30 | 115 | 1.40 | 1550 | 2.75" | 5/16" x 1-1/2" | CWSE | 60024-0 |

(●) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

## Penn Ventilator (Zephyr)

(Continued from Page 34)

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 60030 | 3.3" | 1/80 | 115 | 0.74 | 1400 | 2.17" | 1/4" x 1-3/4" | CWSE | 60030-0 |
| 60076 •* | 5.5" | 1/6 | 115 | 3.40 | 1300/2 | 4.34" | 1/2" x 2.65" | CWSE | 60076-0 |
| 63699 •* | 5.5" | 1/4 | 115 | 3.40 | 1725 | 4.37" | 1/2" x 4.77" | CWSE | 63699-0 |
| 63745 * | 3.3" | 1/30 | 115 | 0.50 / 0.40 | 1550/2 | 3.54" | 3/8" x 3.69" | CWSE | 63745-0 |
| 63746 •* | 3.3" | 1/12 | 115 | 1.50 / 0.90 | 1550/2 | 4.10" | 3/8" x 3.40" | CWSE | 63746-0, JE2H057 |
| 63747 * | 4.4" | 1/7 | 115 | 2.50 | 1550/3 | 4.00" | 1/2" x 2.20" | CWSE | 63747-0 |
| 63748 * | 4.4" | 1/6 | 115 | 1.80 | 1550/3 | 4.00" | 1/2" x 2.60" | CWSE | 63748-0 |
| 63749 •* | 5.5" | 1/4 | 115 | 2.80 | 1725 | 4.52" | 1/2" x 3.00" | CWSE | 63749-0 |
| 63750 •* | 5.5" | 1/3 | 115 | 4.00 | 1550/3 | 6.00" | 1/2" x 5.55" | CWSE | 63750-0 |
| 63751 •* | 5.5" | 1/2 | 120 | 5.00 | 1650/2 | 4.27" | 1/2" x 5.50" | CWSE | 63751-0 |
| 63752 •* | 5.5" | 3/4 | 115 | 8.60 / 9.60 | 1625 | 5.72" | 1/2" x 5.33" | CWSE | 63752-0 |
| 63821 • * | 4.4" | 1/4 | 115 | 2.70 | 1550 | 5.00" | 1/2" x 2.60" | CCWSE | 63821-0 |

## Ref Plus

RMT0004 - RMT0005

RMT0062

SS368 - SS369

MA1074

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| RMT0004 • | SQ | 34W | 115 | 1.60 | 1550 | 3-9/16" | Hubless | CCWSE | NU-34-45-2/1543 |
| RMT0005 • | SQ | 34W | 230 | 0.80 | 1550 | 3-9/16" | Hubless | CCWSE | NU-34-45-4/1542 |
| RMT0062 •* | 56Y | 1-1/2 | 575 | 2.50 | 860 | 10.50" | 5/8" x 2.50" | REV. | 43846, 43424 |
| SS368 | 3.3" | 1/20 | 115 | 1.80 / 2.10 | 1550 / 1300 | 2.84" | 5/16" x 2.75" | CCWSE | RMT-0011 |
| SS369 | 3.3" | 1/20 | 208 / 230 | 0.95 | 1550 | 2.84" | 5/16" x 2.75" | CCWSE | RMT-0012 |
| MA1074 • | 56Y | 2 | 575 | 3.10 | 1140 | 10.00" | 5/8" x 3.00" | REV. | RMT-0064 |

## Reversomatic

SS630

SS260 - SS262 - SS264 - SS266

SS2603 - SS2604

SS2605

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS630 | Skeleton | --- | 120 | 0.75 | 3000 | 1.64" | 7/32" x 1-13/16" | CCWSE | EB50 |
| SS260 | 3.3" | 1/90 | 115 | 0.60 | 1500 | 2.09" | 5/16" x 1.09" | CCWSE | B100, EB60 |
| SS262 | 3.3" | 1/40 | 115 | 1.10 | 1550 | 2.34" | 5/16" x 1.60" | CCWSE | K100, BB100 |
| SS264 | 3.3" | 1/75 | 120 | 0.70 | 1550 | 2.34" | 5/16" x 2.06" | CCWSE | QK100 |
| SS266 | 3.3" | 1/20 | 120 | 1.45 | 1550 | 2.84" | 5/16" x 1.40" | CCWSE | BK100 |
| SS2603 | 4.1" | 1/35 | 115 | 1.15 | 1550 | 3.17" | 1/2" x 2.10" | CCWSE | DB200, DB260 |
| SS2604 | 4.1" | 1/10 | 120 | 2.65 | 1550 | 3.42" | 1/2" x 2.05" | CCWSE | DB300 |
| SS2605 | 5.0" | 1/12 | 115 | 3.00 | 1050 | 2.97" | 1/2" x 1.98" | CCWSE | QBD300, GPD450 |



(•) Ball Bearing
(*) Permanent Split Capacitor Design

## Reznor

131410

UFM78

UFM410

148053

148055

SS2360 - SS6920 - SS2615

SS2380

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 131410 * | 3.3" | 1/10 | 115 | 1.60 | 3000 | 4.10" | 5/16" x 3.20" | CWLE | 131410 |
| UFM78 ●* | 3.3" | 1/10 | 115 / 230 | 1.30 / 0.70 | 3200 | 4-1/8" | 5/16" x 3.25" | REV. | 43846 & 43424 |
| UFM410 ●* | 3.3" | 1/10 | 115 / 230 | 1.40 / 0.70 | 3000 | 6.98" | 1/4" x 3.70" | REV. | D410, 43846 & 43424 |
| 148053 ●* | 3.3" | 1/20 | 115 | 0.70 | 3300 | 4.54" | 5/16" x 3.00" | CWSE | 148053 |
| 148055 | 3.3" | 1/33 | 115 | 1.00 | 3300 | 3.26" | 5/16" x 2.00" | CWSE | 148055 |
| SS2360 | 5.0" | 1/15 | 115 | 2.30 | 1050 | 3.26" | 1/2" x 2.80" | CWSE | R2360 |
| SS6920 | 5.0" | 1/15 | 115 | 2.70 | 1050 | 3.87" | 3/8" x 3.62" | CWSE | R6920 |
| SS2615 | 5.0" | 1/8 | 115 | 4.60 | 1050 | 3.87" | 1/2" x 2.32" | CWSE | R2615 |
| SS2380 * | 5.0" | 1/8 | 115 | 2.30 | 1075 | 4.90" | 1/2" x 2.20" | CWSE | R2380 |

## Swimming Pool Heat Pump (MaxTemp)

87219

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 87219 | 3.3" | 1/25 | 230 | 0.86 | 1550 | 2-3/4" | 5/16" x 1.88" | CWSE | 7163-7219 |

## Schwank

UB579




| Stock # | HP | Volts | Amps. | RPM | Rotation | "C" | "D" | "F" | "J" | "K" | "L" | "M" | "H" | "W" |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| UB579 | 1/35 | 120 | 1.20 | 3000 | CWLE | 5.38" | 1.88" | 3.30" | 4.50" | 5.13" | 4.13" | 4.13" | 1.75" | 3.00" |

(●) Ball Bearing
(*) Permanent Split Capacitor Design

## Temspec

SS799 - SS2799

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS799 * | 5.0" | 1/8 | 115 | 2.10 | 1000/5 | 3.61" | 1/2" x 5.00" | CWSE | DD-029 |
| SS2799 * | 5.5" | 1/6 | 115 | 2.60 | 950/5 | 3.98" | 1/2" x 4.40" | CWSE | DD-030 |

## Tjernlund

950-1020

950-1021

950-1022

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 950-1020 | 3.3" | 1/25 | 115 | 1.37 | 3000 | 4.20" | 5/16" x 2.25" | CCWSE | 950-1020 |
| 950-1021 * | 3.3" | 1/7 | 115 | 1.50 | 3300 | 5.42" | 3/8" x 2.25" | CCWSE | 950-1021 |
| 950-1022 ●* | 5.5" | 1/5 | 115 | 2.80 | 1700 | 4.87" | 1/2" x 3.40" | CCWSE | 950-1022 |

## Torin

SS610

SS313

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS610 | Skeleton | --- | 120 | 1.20 | 2400/2 | 1.97" | 7/32" x 1-3/16" | CCWSE | 7627171 |
| SS313 ● | 3.3" | 1/15 | 115 | 2.20 | 1550 | 3.58" | 5/16" x 3.00" | CWSE | Evaporator |

## Trane

SS303 - SS213

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS303 ● | 3.3" | 1/25 | 115 | 1.50 | 1550 | 3.77" | 5/16" x 3.26" | CWSE | 70270010 |
| SS213 | 3.3" | 1/25 | 115 | 1.40 | 1550 | 3.09" | 5/16" x 1.78" | CWSE | 70200011 |



(●) Ball Bearing
(*) Permanent Split Capacitor Design

## Tyler

SS605

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS605 | Skeleton | --- | 120 | 1.00 | 2800 | 1.97" | 3/16" x 1.74" | CCWSE | Evaporator |

## Unilux

SS799 - SS2799

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS799 * | 5.0" | 1/8 | 115 | 2.10 | 1000/5 | 3.61" | 1/2" x 5.00" | CWSE | DD-029 |
| SS2799 * | 5.5" | 1/6 | 115 | 2.60 | 950/5 | 3.98" | 1/2" x 4.40" | CWSE | DD-030 |

## Venmar, VanEE

11811

12026

12027

SS348

SS438

SS462

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 11811 * | 3.3" | 1/6 | 120 | 2.10 | 1630 / 2 | 5.10" | 3/8" x 1.90" | CCWSE | 11811, ER40200 |
| 12026 •* | 3.3" | 1/8 | 120 | 1.89 | 1630 | 4.75" | 2.93" x 3/8" x 2.93" | CWLE | 12026 |
| 12027 ~* | 3.3" | 1/12 | 120 | 1.20 | 1625 / 3 | 4.14" | 3.50" x 3/8" x 3.50" | CWLE | 12027 |
| SS348 * | 3.3" | 1/15 | 115 | 1.30 | 1550 / 2 | 5.00" | 3/8" x 3.00" | CWSE | M1703, 11802100 |
| SS438 * | 3.3" | 1/14 | 115 | 1.46 | 1625 / 2 | 4.05" | 5/16" x 1.88" | CCWSE | 01038 |
| SS462 ~* | 3.3" | 1/12 | 120 | 1.20 | 1625 / 3 | 4.14" | 3.50" x 3/8" x 3.50" | CWLE | 02101 |

(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

## Woodstove

SS250

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS250 | 3.3" | 1/70 | 120 | 0.65 | 1500 | 3.71" | Hubless | CWSE | 7173-0867, 2868-509-042 |

## Woods

SS235 - SS236

SS336

SS506

SS510

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| SS235 | 3.3" | 1/80 | 115 | 0.90 | 1050 | 2.35" | 1/4" x 1.10" | CWSE | 270099010 |
| SS236 | 3.3" | 1/50 | 115 | 1.00 | 1575 | 2.10" | 1/4" x 1.00" | CWSE | 27009909 |
| SS336 | 3.3" | 1/20 | 115 | 1.80 | 1550 | 2.50" | 1/4" x 1.17" | CWSE | 270099012 |
| SS506 | 3.3" | 1/140 | 115 | 0.50 | 1400 | 1.87" | 1/4" x 2.00" | CCWSE | 2N8701 |
| SS510 ~ | 3.3" | 1/50 | 120 | 1.10 | 1250 | 2.12" | 1.19" x 1/4 x 1.53" | CWLE | Humidifier |

## York

UFM653

SS2360 - SS6920 - SS2615

SS2380

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| UFM653 • | 3.3" | 1/12 | 230/460 | 1.20 / 0.60 | 3000 | 6-7.50" | 1/4" x 2.25" | CCWSE | D1, D2, D3 Roof Top Units |
| SS2360 | 5.0" | 1/15 | 115 | 2.30 | 1050 | 3.32" | 1/2" x 2.80" | CWSE | Unit Heater |
| SS6920 | 5.0" | 1/15 | 115 | 2.70 | 1050 | 3.87" | 3/8" x 3.55" | CWSE | Unit Heater |
| SS2615 | 5.0" | 1/8 | 115 | 4.60 | 1050 | 3.87" | 1/2" x 3.30" | CWSE | Unit Heater |
| SS2380 * | 5.0" | 1/8 | 115 | 2.30 | 1075 | 4.90" | 1/2" x 2.30" | CWSE | Unit Heater |



(•) Ball Bearing
(*) Permanent Split Capacitor Design
(~) Double Shafted

# 48 Frame
## Split Phase Belt Drive Motors

**Features:**

- Continuous Duty
- Class ‘B’ Insulation
- Reversible
- Single Speed
- 40°C Ambient Rating
- Open Drip-Proof
- Single & Dual Voltage
- Automatic Overload
- 60 Hz.
- 1/2” to 5/8” Sleeve & Key Included
- Resilient Base has 48 & 56 Frame Mounting Holes
- Self Aligning Sleeve & Sealed Ball Bearings

All Models

| Stock # | HP | Volts | Amps. | RPM | “A” | Shaft | Rotation | Frame |
|---|---|---|---|---|---|---|---|---|
| SS933 | 1/4 | 115 | 4.80 | 1725 | 6.81” | 1/2” x 1.50” | REV. | 48Y |
| SS934 | 1/3 | 115 | 6.60 | 1725 | 6.81” | 1/2” x 1.50” | REV. | 48Y |
| SS935 | 1/2 | 115 | 8.30 | 1725 | 7.76” | 1/2” x 1.50” | REV. | 48Y |
| SS934B • | 1/3 | 115 | 6.60 | 1725 | 6.81” | 1/2” x 1.50” | REV. | 48Y |
| SS935B • | 1/2 | 115 | 7.60 | 1725 | 6.81” | 1/2” x 1.50” | REV. | 48Y |
| SS933D • | 1/4 | 115/208-230 | 4.60/2.20-2.10 | 1725 | 6.75” | 1/2” x 1.88” | REV. | 48/56 |
| SS934D • | 1/3 | 115/208-230 | 6.60/3.40-3.10 | 1725 | 6.75” | 1/2” x 1.88” | REV. | 48/56 |
| SS935D • | 1/2 | 115/208-230 | 7.60/3.70-3.80 | 1725 | 8.58” | 1/2” x 1.88” | REV. | 48/56 |
| SS936D • | 3/4 | 115/208-230 | 11.60/5.90-5.80 | 1725 | 10.55” | 5/8” x 1.88” | REV. | 56H |

(•) Ball Bearing
(*) Permanent Split Capacitor Design

# 48 Frame
## 575 Volt - Direct Drive Blower Motors

**Features:**

- Resilient Rings
- P.S.C Design
- Extended Thru-Bolts on Shaft End
- Reversible Rotation
- Single Phase
- Open Construction
- Sealed Ball Bearings

All Models

Available Accessories

POC15-1 - POC25-1

1223A - 1364A

1479 - 1495

## Motors

| Stock # | Diameter | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Replaces |
|---|---|---|---|---|---|---|---|---|---|
| 5BD1076 | 5.5" | 3/4 | 575 | 2.30 | 1075 / 2 | 6.30" | 1/2" x 5.00" | REV. | HQ1095096, F34575DD, 21A309661P01 X70671479-010, 024-31946-003 |
| 5BD1106 | 5.5" | 1 | 575 | 2.40 | 1075 / 2 | 6.50" | 1/2" x 5.00" | REV. | F1575DD, 50HJ900575, 88C7601 X70671181-017, X70671479-001 |

## Accessories

| Stock # | Description | | | |
|---|---|---|---|---|
| POC15-1 | 15 MFD / 370 VAC - Oval | Case Size: 2.16" x 3.60" | Fits: 5BD1076 | |
| POC25-1 | 25 MFD / 370 VAC - Oval | Case Size: 2.90" x 3.60" | Fits: 5BD1106 | |
| 1223A | Diameter: 48 Frame | Min B.C.D: 6-7/8" | Max B.C.D: 8-1/8" | Lug Size: SML. 1-3/4" |
| 1364A | Diameter: 48 Frame | Min B.C.D: 8-1/8" | Max B.C.D: 12-1/8" | Lug Size: LRG. 4" |
| 1479 | Diameter: 5-5/8" | Bolt Circle: 10" | | |
| 1495 | Diameter: 5-5/8" | Bolt Circle: 11" | | |

# 48 Frame
## Flex Mount & Direct Drive Blower Motors

**Features:**

- P.S.C Design
- 40°C Ambient Rating
- Reversing Plug
- Extended Thru-Bolts
- Resilient Rings Included
- Thermally Protected
- Open Construction
- Long Life Self Aligning Sleeve Bearings

All Models

SS752 - SS753 - SS754 - SS973 - SS974

Available Accessories

POC5-1 - POC7.5-1
POC10-1 - POC15-1

FLEX50 - FLEX55

1223A - 1364A

## Motors

| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Capacitor |
|---|---|---|---|---|---|---|---|---|
| SS3583 | 1/4 | 115 | 4.20 | 1075 / 3 | 4.00" | 1/2" x 4.00" | REV. | 5 / 370 |
| SS3584 | 1/4 | 208 - 230 | 2.00 | 1075 / 3 | 4.00" | 1/2" x 4.00" | REV. | 5 / 370 |
| SS3585 | 1/3 | 115 | 5.50 | 1075 / 3 | 4.36" | 1/2" x 4.00" | REV. | 7.5 / 370 |
| SS3586 | 1/3 | 208 - 230 | 2.80 | 1075 / 3 | 4.36" | 1/2" x 4.00" | REV. | 5 / 370 |
| SS3587 | 1/2 | 115 | 7.50 | 1075 / 3 | 4.86" | 1/2" x 4.00" | REV. | 10 / 370 |
| SS3588 | 1/2 | 208 - 230 | 3.60 | 1075 / 3 | 4.86" | 1/2" x 4.00" | REV. | 10 / 370 |
| SS3589 | 3/4 | 115 | 10.20 | 1075 / 3 | 5.36" | 1/2" x 4.00" | REV. | 15 / 370 |
| SS3590 | 3/4 | 208 - 230 | 5.50 | 1075 / 3 | 5.36" | 1/2" x 4.00" | REV. | 10 / 370 |
| SS752 | 1/4 | 115 | 3.60 | 1075 / 4 | 4.05" | 1/2" x 6.00" | REV. | 5 / 370 |
| SS753 | 1/3 | 115 | 4.80 | 1075 / 4 | 4.27" | 1/2" x 6.00" | REV. | 10 / 370 |
| SS754 | 1/2 | 115 | 8.00 | 1075 / 4 | 4.82" | 1/2" x 6.00" | REV. | 10 / 370 |
| SS973 | 1/3 | 208 - 230 | 2.30 - 2.50 | 1075 / 4 | 4.27" | 1/2" x 6.00" | REV. | 10 / 370 |
| SS974 | 1/2 | 208 - 230 | 3.30 - 4.00 | 1075 / 4 | 4.82" | 1/2" x 6.00" | REV. | 10 / 370 |

## Accessories

| Stock # | Description | | | |
|---|---|---|---|---|
| POC5-1 | 5 MFD / 370 VAC - Oval | Case Size: 2.16" x 2.062" | | |
| POC7.5-1 | 7.5 MFD / 370 VAC - Oval | Case Size: 2.16" x 2.812" | | |
| POC10-1 | 10 MFD / 370 VAC - Oval | Case Size: 2.16" x 2.812" | | |
| POC15-1 | 5 MFD / 370 VAC - Oval | Case Size: 2.16" x 3.60" | | |
| FLEX50 | Flex Mounting Kit for 5" Diameter Motors 2" Band - 9" & 10" B.C. Mounting Holes | | | |
| FLEX55 | Flex Mounting Kit for 5-5/8" Diameter Motors 2" Band - 9" & 10" B.C. Mounting Holes | | | |
| 1223A | Diameter: 48 Frame | Min B.C.D: 6-7/8" | Max B.C.D: 8-1/8" | Lug Size: SML. 1-3/4" |
| 1364A | Diameter: 48 Frame | Min B.C.D: 8-1/8" | Max B.C.D: 12-1/8" | Lug Size: LRG. 4" |

# 48 Frame
## Condenser Fan Motors

**Features:**

- P.S.C Design
- 60°C Ambient Rating
- Reversing Plug
- Extended Thru-Bolts
- Shaft Slinger
- Totally Enclosed - Air Over Construction
- Sealed Ball Bearings

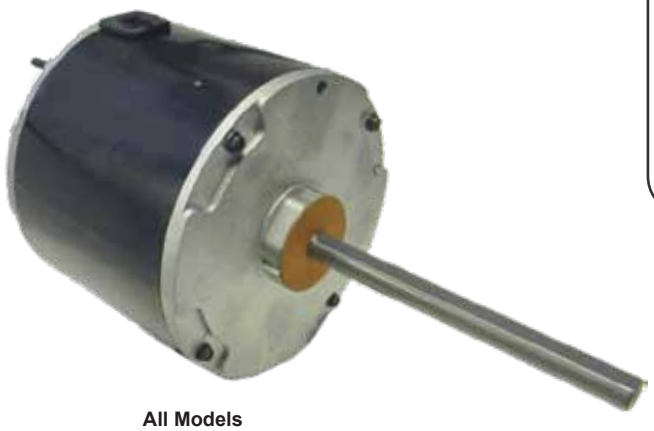

All Models

Available Accessories

POC5-1 - POC7.5-1
POC10-1

1330A

1223A - 1364A

## Motors

| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Capacitor |
|---|---|---|---|---|---|---|---|---|
| SS3727 | 1/6 | 208 - 230 | 1.30 | 1075 | 3.86" | 1/2" x 6.00" | REV. | 5 / 370 |
| SS3728 | 1/4 | 208 - 230 | 2.00 | 1075 | 4.11" | 1/2" x 6.00" | REV. | 5 / 370 |
| SS739B | 1/4 | 208 - 230 | 1.90 | 825 | 4.25" | 1/2" x 6.50" | REV. | 5 / 370 |
| SS3729 | 1/3 | 208 - 230 | 2.70 | 1075 | 4.61" | 1/2" x 6.00" | REV. | 7.5 / 370 |
| SS740B | 1/3 | 208 - 230 | 2.10 | 825 | 5.00" | 1/2" x 6.50" | REV. | 7.5 / 370 |
| SS3730 | 1/2 | 208 - 230 | 3.50 | 1075 | 5.11" | 1/2" x 6.00" | REV. | 10 / 370 |
| SS3731 | 3/4 | 208 - 230 | 5.30 | 1075 | 5.36" | 1/2" x 6.00" | REV. | 10 / 370 |

## Accessories

| Stock # | Description | | | |
|---|---|---|---|---|
| POC5-1 | 5 MFD / 370 VAC - Oval | Case Size: 2.16" x 2.062" | | |
| POC7.5-1 | 7.5 MFD / 370 VAC - Oval | Case Size: 2.16" x 2.812" | | |
| POC10-1 | 10 MFD / 370 VAC - Oval | Case Size: 2.16" x 2.812" | | |
| 1330A | Plastic Rain Shield 1/2" Bore | | | |
| 1223A | Diameter: 48 Frame | Min B.C.D: 6-7/8" | Max B.C.D: 8-1/8" | Lug Size: SML. 1-3/4" |
| 1364A | Diameter: 48 Frame | Min B.C.D: 8-1/8" | Max B.C.D: 12-1/8" | Lug Size: LRG. 4" |

# 48 Frame
## Unit Heater & Exhaust Fan Motors

**Features:**

- P.S.C Design
- Round Body, Includes Resilient Rings
- Reversing Plug
- Thermally Protected
- Totally Enclosed - Air Over Construction
- Sealed Ball Bearings

All Models




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Capacitor |
|---|---|---|---|---|---|---|---|---|
| SS749 | 1/6 | 115 | 2.40 | 1075 | 4.52" | 1/2" x 4.50" | REV. | Included |
| SS750 | 1/4 | 115 | 4.10 | 1075 | 4.52" | 1/2" x 4.50" | REV. | Included |
| SS751 | 1/3 | 115 | 5.00 | 1075 | 4.52" | 1/2" x 4.50" | REV. | Included |

# 48 Frame
## Pedestal Fan Air Circulator Motors

**Features:**

- P.S.C Design
- Yoke Mount - Extended Thru-Bolts
- 2 Speeds With Pull Chain
- 10 Foot Cord & Plug
- Thermally Protected
- Totally Enclosed - Air Over Construction
- Sealed Ball Bearings

All Models




| Stock # | HP | Volts | Amps. | RPM | "A" | Shaft | Rotation | Capacitor |
|---|---|---|---|---|---|---|---|---|
| SS486 | 1/4 | 115 | 3.40 | 1100 / 2 | 6.50" | 1/2" x 3.00" | REV. | Included |
| SS647 | 1/3 | 115 | 4.40 | 1100 / 2 | 6.90" | 1/2" x 3.00" | REV. | Included |

# General Purpose & Farm Duty
## Single Phase Motors - Rolled Steel TEFC

**Features:**

- Rolled Steel Construction
- Continuous Duty
- Class 'B' Insulation
- High Efficiency Capacitor Start/Run Design
- UL Listed & CSA Approved
- Reversible
- 40°C Ambient
- Removable Rigid Base
- Manual Overload
- 1.15 S.F.
- 60 Hz.
- Ball Bearings

All Models




| Stock # | HP | Volts | Amps. | RPM | "C" | Frame |
|---|---|---|---|---|---|---|
| FD141C | 1/3 | 115 / 208-230 | 4.70 / 2.50 | 3600 | 12.00" | 56C |
| FD142C | 1/2 | 115 / 208-230 | 5.90 / 3.10 | 3600 | 12.00" | 56C |
| FD143C | 3/4 | 115 / 208-230 | 8.10 / 4.20 | 3600 | 12.00" | 56C |
| FD144C | 1 | 115 / 208-230 | 8.30 / 4.40 | 3600 | 12.00" | 56C |
| FD145C | 1.5 | 115 / 208-230 | 14.00 / 7.00 | 3600 | 12.00" | 56C |
| FD146C | 2 | 115 / 208-230 | 16.20 / 8.40 | 3600 | 13.80" | 56C |
| FD147C | 3 | 115 / 208-230 | 12.40 | 3600 | 14.60" | 56C |
| FD161C | 1/3 | 115 / 208-230 | 4.30 / 2.30 | 1800 | 12.20" | 56C |
| FD162C | 1/2 | 115 / 208-230 | 5.80 / 3.00 | 1800 | 12.00" | 56C |
| FD163C | 3/4 | 115 / 208-230 | 8.10 / 4.20 | 1800 | 12.00" | 56C |
| FD164C | 1 | 115 / 208-230 | 9.20 / 5.00 | 1800 | 12.00" | 56C |
| FD165C | 1.5 | 115 / 208-230 | 13.30 / 7.10 | 1800 | 12.60" | 56C |
| FD166C | 2 | 115 / 208-230 | 16.50 / 9.00 | 1800 | 14.20" | 56HC |
| FD176 | 2 | 115 / 208-230 | 16.50 / 8.30 | 1800 | 14.20" | 145T |
| FD176C | 2 | 115 / 208-230 | 16.50 / 8.30 | 1800 | 14.20" | 145TC |

# General Purpose
## Single Phase Motors - Rolled Steel ODP

**Features:**

- Continuous Duty
- Class 'B' Insulation
- Capacitor Start/Run
- UL Listed & CSA Approved
- Reversible
- 40°C Ambient
- Rigid Base - Dual Mounting Holes
- No Overload
- Rolled Steel Construction
- 1.15 S.F.
- 60 Hz.
- Ball Bearings

All Models




| Stock # | HP | Volts | Amps | RPM | "C" | Frame | "AG" |
|---|---|---|---|---|---|---|---|
| OR547 | 3 | 208 - 230 | 13.50 - 11.90 | 1800 | 15.75" | 182T | 12.80" |
| OR548 | 5 | 208 - 230 | 22.50 - 20.00 | 1800 | 15.75" | 184T | 12.80" |

# General Purpose & Farm Duty
## Single Phase Motors - Rolled Steel TEFC

**Features:**

- Continuous Duty
- Class 'F' Insulation
- Capacitor Start/Run
- UL Listed & CSA Approved
- Reversible
- 'C' Face Kits Available
- 40°C Ambient
- Rigid Base - Dual Mounting Holes
- Rolled Steel Construction
- 1.15 S.F.
- 60 Hz.
- Ball Bearings

All Models




| Stock # | HP | Volts | Amps | RPM | "C" | Frame | Comments |
|---|---|---|---|---|---|---|---|
| FD127 | 3 | 208 - 230 | 12.40 - 14.00 | 3600 | 16.70" | 182T | Manual Overload |
| FD128 | 5 | 208 - 230 | 23.00 - 20.00 | 3600 | 16.70" | 184T | Manual Overload |
| FD129 | 7.5 | 208 - 230 | 31.50 - 29.00 | 3600 | 16.70" | 213T | No Overload |
| FD12A | 10 | 208 - 230 | 43.00 - 39.00 | 3600 | 20.30" | 215T | No Overload |
| FD177 | 3 | 208 - 230 | 14.50 - 12.60 | 1800 | 16.70" | 182T | Manual Overload |
| FD178 | 5 | 208 - 230 | 22.80 - 20.10 | 1800 | 18.10" | 184T | Manual Overload |
| FD179 | 7.5 | 208 - 230 | 33.00 - 30.00 | 1800 | 20.30" | 213T | No Overload |
| FD17A | 10 | 208 - 230 | 42.00 - 38.10 | 1800 | 20.30" | 215T | No Overload |

# 56 Frame
## Three Phase Motors - Rolled Steel ODP

**Features:**

- Continuous Duty
- Class ‘B’ Insulation
- UL Listed & CSA Approved
- 40°C Ambient
- Rigid Base
- Rolled Steel Construction
- 1.15 S.F.
- Ball Bearings

All Models




| Stock # | HP | Volts | Amps. | RPM | “C” | Frame |
|---|---|---|---|---|---|---|
| WD661 | 1/3 | 575 | 0.65 | 1800 | 11.00” | 56 |
| WD682 | 1/2 | 208-230 / 460 | 2.20 / 1.10 | 1800 | 11.00” | 56 |
| WD662 | 1/2 | 575 | 0.87 | 1800 | 11.00” | 56 |
| WD683 | 3/4 | 208-230 / 460 | 2.80 / 1.40 | 1800 | 11.00” | 56 |
| WD663 | 3/4 | 575 | 1.12 | 1800 | 11.00” | 56 |
| WD684 | 1 | 208-230 / 460 | 3.60 / 1.80 | 1800 | 11.00” | 56 |
| WD664 | 1 | 575 | 1.40 | 1800 | 11.00” | 56 |
| WD685 | 1.5 | 208-230 / 460 | 4.60 / 2.30 | 1800 | 11.00” | 56 |
| WD665 | 1.5 | 575 | 1.80 | 1800 | 11.00” | 56 |
| WD686 | 2 | 208-230 / 460 | 5.80 / 2.90 | 1800 | 11.00” | 56 |
| WD666 | 2 | 575 | 2.30 | 1800 | 11.00” | 56 |

# NEMA Premium
## Three Phase Motors - Rolled Steel ODP

**Features:**

- Rolled Steel Construction
- Continuous Duty
- Class 'F' Insulation
- UL Listed & CSA Approved
- 40°C Ambient
- Rigid Base
- Dual Mounting Holes in Base
- 1.15 S.F.
- Ball Bearings

All Models




| Stock # | HP | Volts | Amps. | RPM | "C" | Frame | Efficiency |
|---|---|---|---|---|---|---|---|
| ORP674 | 1 | 208-230 / 460 | 3.20 / 1.60 | 1800 | 11.60" | 143T | 85.5% |
| ORP654 | 1 | 575 | 1.40 | 1800 | 11.60" | 143T | 85.5% |
| ORP675 | 1.5 | 208-230 / 460 | 4.50 / 2.20 | 1800 | 11.60" | 145T | 86.5% |
| ORP655 | 1.5 | 575 | 1.80 | 1800 | 11.60" | 145T | 86.5% |
| ORP676 | 2 | 208-230 / 460 | 5.90 / 2.90 | 1800 | 11.60" | 145T | 86.5% |
| ORP656 | 2 | 575 | 2.30 | 1800 | 11.60" | 145T | 86.5% |
| ORP677 | 3 | 208-230 / 460 | 8.00 / 4.00 | 1800 | 13.80" | 182T | 89.5% |
| ORP657 | 3 | 575 | 3.30 | 1800 | 13.80" | 182T | 89.5% |
| ORP678 | 5 | 208-230 / 460 | 13.20 / 6.60 | 1800 | 13.80" | 184T | 89.5% |
| ORP658 | 5 | 575 | 5.40 | 1800 | 13.80" | 184T | 89.5% |
| ORP679 | 7.5 | 208-230 / 460 | 19.00 / 9.50 | 1800 | 16.90" | 213T | 91.0% |
| ORP659 | 7.5 | 575 | 7.80 | 1800 | 16.90" | 213T | 91.0% |
| ORP67A | 10 | 208-230 / 460 | 25.00 / 12.50 | 1800 | 16.90" | 215T | 91.7% |
| ORP65A | 10 | 575 | 10.50 | 1800 | 16.90" | 215T | 91.7% |
| ORP65B | 15 | 575 | 14.90 | 1800 | 19.75" | 254T | 93.0% |
| ORP65C | 20 | 575 | 19.70 | 1800 | 19.75" | 256T | 93.0% |

# 56 & 56HZ Frame
## Three Phase Motors - Aluminum Frame TEFC

**Features:**

- Aluminum Construction
- Continuous Duty
- Class 'B' Insulation
- Removable Bolt-on Feet
- 3 Positions for Feet Allow for F-1, F-2, F-0 Conduit Box Location
- Inverter Duty 10:1 V.T. / 2:1 C.T.
- Ball Bearings
- 40°C Ambient
- UL Listed & CSA Approved




| Stock # | HP | Volts | Amps. | RPM | "C" | Shaft (Dia.) | Frame |
|---|---|---|---|---|---|---|---|
| WA631 | 1/3 | 208-230 / 460 | 1.26 - 1.14 / 0.57 | 3600 | 12.67" | 5/8" | 56 |
| WA611 | 1/3 | 575 | 0.46 | 3600 | 12.67" | 5/8" | 56 |
| WA632 | 1/2 | 208-230 / 460 | 1.82 - 1.64 / 0.82 | 3600 | 12.67" | 5/8" | 56 |
| WA612 | 1/2 | 575 | 0.66 | 3600 | 12.67" | 5/8" | 56 |
| WA633 | 3/4 | 208-230 / 460 | 2.59 - 2.34 / 1.17 | 3600 | 12.67" | 5/8" | 56 |
| WA613 | 3/4 | 575 | 0.94 | 3600 | 12.67" | 5/8" | 56 |
| WA634 | 1 | 208-230 / 460 | 3.24 - 2.92 / 1.46 | 3600 | 13.66" | 5/8" | 56H |
| WA614 | 1 | 575 | 1.17 | 3600 | 13.66" | 5/8" | 56H |
| TA624 | 1 | 208-230 / 460 | 3.24 - 2.92 / 1.46 | 3600 | 14.02" | 7/8" | 56HZ |
| TA604 | 1 | 575 | 1.17 | 3600 | 14.02" | 7/8" | 56HZ |
| WA635 | 1-1/2 | 208-230/460 | 4.71 - 4.26 / 2.13 | 3600 | 13.66" | 5/8" | 56H |
| WA615 | 1-1/2 | 575 | 1.70 | 3600 | 13.66" | 5/8" | 56H |
| TA625 | 1-1/2 | 208-230/460 | 4.71 - 4.26 / 2.13 | 3600 | 14.02" | 7/8" | 56HZ |
| TA605 | 1-1/2 | 575 | 1.70 | 3600 | 14.02" | 7/8" | 56HZ |
| WA636 | 2 | 208-230/460 | 6.02 - 5.44 / 2.72 | 3600 | 13.66" | 5/8" | 56H |
| WA616 | 2 | 575 | 2.18 | 3600 | 13.66" | 5/8" | 56H |
| TA626 | 2 | 208-230/460 | 6.02 - 5.44 / 2.72 | 3600 | 14.02" | 7/8" | 56HZ |
| TA606 | 2 | 575 | 2.18 | 3600 | 14.02" | 7/8" | 56HZ |
| WA637 | 3 | 208-230/460 | 8.76 - 7.92 / 3.96 | 3600 | 13.66" | 5/8" | 56H |
| WA617 | 3 | 575 | 3.17 | 3600 | 13.66" | 5/8" | 56H |
| TA627 | 3 | 208-230/460 | 8.70 - 7.96 / 3.96 | 3600 | 14.02" | 7/8" | 56HZ |
| TA607 | 3 | 575 | 3.17 | 3600 | 14.02" | 7/8" | 56HZ |

# 56 & 56HZ Frame
## Three Phase Motors - Aluminum Frame TEFC

**Features:**

- Aluminum Construction
- Continuous Duty
- Class ‘B’ Insulation
- Removable Bolt-on Feet
- 3 Positions for Feet Allow for F-1, F-2, F-0 Conduit Box Location
- Inverter Duty 10:1 V.T. / 2:1 C.T.
- Ball Bearings
- 40°C Ambient
- UL Listed & CSA Approved




| Stock # | HP | Volts | Amps. | RPM | “C” | Shaft (Dia.) | Frame |
|---|---|---|---|---|---|---|---|
| WA681 | 1/3 | 208-230 / 460 | 1.43 - 1.30 / 0.65 | 1800 | 12.67” | 5/8” | 56 |
| WA661 | 1/3 | 575 | 0.52 | 1800 | 12.67” | 5/8” | 56 |
| WA682 | 1/2 | 208-230 / 460 | 2.12 - 1.92 / 0.96 | 1800 | 12.67” | 5/8” | 56 |
| WA662 | 1/2 | 575 | 0.77 | 1800 | 12.67” | 5/8” | 56 |
| WA683 | 3/4 | 208-230 / 460 | 2.94 - 2.66 / 1.33 | 1800 | 12.67” | 5/8” | 56 |
| WA663 | 3/4 | 575 | 1.06 | 1800 | 12.67” | 5/8” | 56 |
| WA684 | 1 | 208-230 / 460 | 3.84 - 3.48 / 1.74 | 1800 | 13.66” | 5/8” | 56H |
| WA664 | 1 | 575 | 1.39 | 1800 | 13.66” | 5/8” | 56H |
| TA674 | 1 | 208-230 / 460 | 3.84 - 3.48 / 1.74 | 1800 | 14.02” | 7/8” | 56HZ |
| TA654 | 1 | 575 | 1.39 | 1800 | 14.02” | 7/8” | 56HZ |
| WA685 | 1-1/2 | 208-230/460 | 5.28 - 4.78 / 2.39 | 1800 | 13.66” | 5/8” | 56H |
| WA665 | 1-1/2 | 575 | 1.91 | 1800 | 13.66” | 5/8” | 56H |
| TA675 | 1-1/2 | 208-230/460 | 5.28 - 4.78 / 2.39 | 1800 | 14.02” | 7/8” | 56HZ |
| TA655 | 1-1/2 | 575 | 1.91 | 1800 | 14.02” | 7/8” | 56HZ |
| WA686 | 2 | 208-230/460 | 6.73 - 6.08 / 3.04 | 1800 | 13.66” | 5/8” | 56H |
| WA666 | 2 | 575 | 2.43 | 1800 | 13.66” | 5/8” | 56H |
| TA676 | 2 | 208-230/460 | 6.73 - 6.08 / 3.04 | 1800 | 14.02” | 7/8” | 56HZ |
| TA656 | 2 | 575 | 2.43 | 1800 | 14.02” | 7/8” | 56HZ |

# 56C & 56HCZ Frame
## Three Phase Motors - Aluminum Frame TEFC

**Features:**

- Aluminum Construction
- Continuous Duty
- Class 'B' Insulation
- Removable Bolt-on Feet
- 3 Positions for Feet Allow for F-1, F-2, F-0 Conduit Box Location
- Inverter Duty 10:1 V.T. / 2:1 C.T.
- Ball Bearings
- 40°C Ambient
- UL Listed & CSA Approved




| Stock # | HP | Volts | Amps. | RPM | "C" | Shaft (Dia.) | Frame |
|---|---|---|---|---|---|---|---|
| WA631C | 1/3 | 208-230 / 460 | 1.26 - 1.14 / 0.57 | 3600 | 12.67" | 5/8" | 56C |
| WA611C | 1/3 | 575 | 0.46 | 3600 | 12.67" | 5/8" | 56C |
| WA632C | 1/2 | 208-230 / 460 | 1.82 - 1.64 / 0.82 | 3600 | 12.67" | 5/8" | 56C |
| WA612C | 1/2 | 575 | 0.66 | 3600 | 12.67" | 5/8" | 56C |
| WA633C | 3/4 | 208-230 / 460 | 2.59 - 2.34 / 1.17 | 3600 | 12.67" | 5/8" | 56C |
| WA613C | 3/4 | 575 | 0.94 | 3600 | 12.67" | 5/8" | 56C |
| WA634C | 1 | 208-230 / 460 | 3.24 - 2.92 / 1.46 | 3600 | 13.66" | 5/8" | 56HC |
| WA614C | 1 | 575 | 1.17 | 3600 | 13.66" | 5/8" | 56HC |
| TA624C | 1 | 208-230 / 460 | 3.24 - 2.92 / 1.46 | 3600 | 14.02" | 7/8" | 56HCZ |
| TA604C | 1 | 575 | 1.17 | 3600 | 14.02" | 7/8" | 56HCZ |
| WA635C | 1-1/2 | 208-230/460 | 4.71 - 4.26 / 2.13 | 3600 | 13.66" | 5/8" | 56HC |
| WA615C | 1-1/2 | 575 | 1.70 | 3600 | 13.66" | 5/8" | 56HC |
| TA625C | 1-1/2 | 208-230/460 | 4.71 - 4.26 / 2.13 | 3600 | 14.02" | 7/8" | 56HCZ |
| TA605C | 1-1/2 | 575 | 1.70 | 3600 | 14.02" | 7/8" | 56HCZ |
| WA636C | 2 | 208-230/460 | 6.02 - 5.44 / 2.72 | 3600 | 13.66" | 5/8" | 56HC |
| WA616C | 2 | 575 | 2.18 | 3600 | 13.66" | 5/8" | 56HC |
| TA626C | 2 | 208-230/460 | 6.02 - 5.44 / 2.72 | 3600 | 14.02" | 7/8" | 56HCZ |
| TA606C | 2 | 575 | 2.18 | 3600 | 14.02" | 7/8" | 56HCZ |
| WA637C | 3 | 208-230/460 | 8.76 - 7.92 / 3.96 | 3600 | 13.66" | 5/8" | 56HC |
| WA617C | 3 | 575 | 3.17 | 3600 | 13.66" | 5/8" | 56HC |
| TA627C | 3 | 208-230/460 | 8.70 - 7.96 / 3.96 | 3600 | 14.02" | 7/8" | 56HCZ |
| TA607C | 3 | 575 | 3.17 | 3600 | 14.02" | 7/8" | 56HCZ |

# 56C & 56HCZ Frame
## Three Phase Motors - Aluminum Frame TEFC

**Features:**

- Aluminum Construction
- Continuous Duty
- Class 'B' Insulation
- Removable Bolt-on Feet
- 3 Positions for Feet Allow for F-1, F-2, F-0 Conduit Box Location
- Inverter Duty 10:1 V.T. / 2:1 C.T.
- Ball Bearings
- 40°C Ambient
- UL Listed & CSA Approved




| Stock # | HP | Volts | Amps. | RPM | "C" | Shaft (Dia.) | Frame |
|---|---|---|---|---|---|---|---|
| WA681C | 1/3 | 208-230 / 460 | 1.43 - 1.30 / 0.65 | 1800 | 12.67" | 5/8" | 56C |
| WA661C | 1/3 | 575 | 0.52 | 1800 | 12.67" | 5/8" | 56C |
| WA682C | 1/2 | 208-230 / 460 | 2.12 - 1.92 / 0.96 | 1800 | 12.67" | 5/8" | 56C |
| WA662C | 1/2 | 575 | 0.77 | 1800 | 12.67" | 5/8" | 56C |
| WA683C | 3/4 | 208-230 / 460 | 2.94 - 2.66 / 1.33 | 1800 | 12.67" | 5/8" | 56C |
| WA663C | 3/4 | 575 | 1.06 | 1800 | 12.67" | 5/8" | 56C |
| WA684C | 1 | 208-230 / 460 | 3.84 - 3.48 / 1.74 | 1800 | 13.66" | 5/8" | 56HC |
| WA664C | 1 | 575 | 1.39 | 1800 | 13.66" | 5/8" | 56HC |
| TA674C | 1 | 208-230 / 460 | 3.84 - 3.48 / 1.74 | 1800 | 14.02" | 7/8" | 56HCZ |
| TA654C | 1 | 575 | 1.39 | 1800 | 14.02" | 7/8" | 56HCZ |
| WA685C | 1-1/2 | 208-230/460 | 5.28 - 4.78 / 2.39 | 1800 | 13.66" | 5/8" | 56HC |
| WA665C | 1-1/2 | 575 | 1.91 | 1800 | 13.66" | 5/8" | 56HC |
| TA675C | 1-1/2 | 208-230/460 | 5.28 - 4.78 / 2.39 | 1800 | 14.02" | 7/8" | 56HCZ |
| TA655C | 1-1/2 | 575 | 1.91 | 1800 | 14.02" | 7/8" | 56HCZ |
| WA686C | 2 | 208-230/460 | 6.73 - 6.08 / 3.04 | 1800 | 13.66" | 5/8" | 56HC |
| WA666C | 2 | 575 | 2.43 | 1800 | 13.66" | 5/8" | 56HC |
| TA676C | 2 | 208-230/460 | 6.73 - 6.08 / 3.04 | 1800 | 14.02" | 7/8" | 56HCZ |
| TA656C | 2 | 575 | 2.43 | 1800 | 14.02" | 7/8" | 56HCZ |

# 56C Frame
## Three Phase Motors - Rolled Steel TEFC

**Features:**

- Rolled Steel Construction
- Continuous Duty
- Class 'B' Insulation
- UL Listed & CSA Approved
- 40°C Ambient
- Rigid Base
- Removable Bolt-on Base
- 1.15 S.F.
- Ball Bearings

All Models




| Stock # | HP | Volts | Amps. | RPM | "C" | Frame |
|---|---|---|---|---|---|---|
| WE681C | 1/3 | 208-230 / 460 | 1.62 / 0.82 | 1770 | 12.60" | 56C |
| WE661C | 1/3 | 575 | 0.65 | 1800 | 12.60" | 56C |
| WE612C | 1/2 | 575 | 0.82 | 3600 | 12.60" | 56C |
| WE682C | 1/2 | 208-230 / 460 | 2.20 / 1.10 | 1800 | 12.60" | 56C |
| WE662C | 1/2 | 575 | 0.88 | 1800 | 12.60" | 56C |
| WE613C | 3/4 | 575 | 0.90 | 3600 | 12.60" | 56C |
| WE683C | 3/4 | 208-230 / 460 | 2.80 / 1.40 | 1800 | 12.60" | 56C |
| WE663C | 3/4 | 575 | 1.00 | 1800 | 12.60" | 56C |
| WE614C | 1 | 575 | 1.30 | 3600 | 12.60" | 56C |
| WE684C | 1 | 208-230 / 460 | 3.40 / 1.70 | 1800 | 12.60" | 56C |
| WE664C | 1 | 575 | 1.40 | 1800 | 12.60" | 56C |
| WE615C | 1.5 | 575 | 1.80 | 3600 | 12.60" | 56C |
| WE685C | 1.5 | 208-230 / 460 | 4.60 / 2.30 | 1800 | 12.60" | 56C |
| WE665C | 1.5 | 575 | 1.82 | 1800 | 12.60" | 56C |
| WE616C | 2 | 575 | 2.10 | 3600 | 12.60" | 56C |
| WE686C | 2 | 208-230 / 460 | 5.80 / 2.90 | 1800 | 12.60" | 56C |
| WE666C | 2 | 575 | 2.40 | 1800 | 12.60" | 56C |
| WE617C | 3 | 575 | 3.10 | 3600 | 13.00" | 56C |

# NEMA Premium
## Three Phase Motors - Rolled Steel TEFC

**Features:**

- Rolled Steel Construction
- Continuous Duty
- Class 'F' Insulation
- UL Listed & CSA Approved
- 40°C Ambient
- Rigid Base
- Dual Mounting Holes in Base
- 1.15 S.F.
- Ball Bearings



All Models

| Stock # | HP | Volts | Amps. | RPM | "C" | Frame | Efficiency |
|---|---|---|---|---|---|---|---|
| TRP674 | 1 | 208-230 / 460 | 3.00 / 1.50 | 1800 | 13.00" | 143T | 85.5% |
| TRP654 | 1 | 575 | 1.30 | 1800 | 13.00" | 143T | 85.5% |
| TRP704 | 1 | 575 | 1.40 | 1200 | 13.00" | 143T | 87.5% |
| TRP605 | 1.5 | 575 | 1.68 | 3600 | 13.00" | 143T | 84.0% |
| TRP675 | 1.5 | 208-230 / 460 | 4.80 / 2.40 | 1800 | 13.00" | 145T | 86.5% |
| TRP655 | 1.5 | 575 | 1.80 | 1800 | 13.00" | 145T | 86.5% |
| TRP705 | 1.5 | 575 | 2.02 | 1200 | 15.70" | 182T | 87.5% |
| TRP606 | 2 | 575 | 2.10 | 3600 | 13.25" | 145T | 85.5% |
| TRP676 | 2 | 208-230 / 460 | 6.00 / 3.00 | 1800 | 13.00" | 145T | 86.5% |
| TRP656 | 2 | 575 | 2.40 | 1800 | 13.00" | 145T | 86.5% |
| TRP706 | 2 | 575 | 2.64 | 1200 | 15.50" | 184T | 88.5% |
| TRP607 | 3 | 575 | 2.10 | 3600 | 13.00" | 182T | 86.5% |
| TRP677 | 3 | 208-230 / 460 | 19.20 / 9.60 | 1800 | 15.70" | 182T | 89.5% |
| TRP657 | 3 | 575 | 3.40 | 1800 | 15.70" | 182T | 89.5% |
| TRP707 | 3 | 575 | 3.92 | 1200 | 19.20" | 213T | 89.5% |
| TRP608 | 5 | 575 | 5.00 | 3600 | 15.70" | 184T | 88.5% |
| TRP678 | 5 | 208-230 / 460 | 12.40 / 6.20 | 1800 | 15.82" | 184T | 89.5% |
| TRP658 | 5 | 575 | 5.20 | 1800 | 15.70" | 184T | 89.5% |
| TRP708 | 5 | 575 | 6.00 | 1200 | 19.20" | 215T | 89.5% |
| TRP609 | 7.5 | 575 | 7.40 | 3600 | 19.20" | 213T | 89.5% |
| TRP679 | 7.5 | 208-230 / 460 | 19.20 / 9.60 | 1800 | 18.72" | 213T | 91.7% |
| TRP659 | 7.5 | 575 | 8.00 | 1800 | 19.20" | 213T | 91.7% |
| TRP60A | 10 | 575 | 9.60 | 3600 | 19.20" | 215T | 90.2% |
| TRP67A | 10 | 208-230 / 460 | 19.20 / 9.60 | 1800 | 19.20" | 215T | 91.7% |
| TRP65A | 10 | 575 | 10.40 | 1800 | 19.20" | 215T | 91.7% |

# NEMA Premium
## Three Phase Motors - Cast Iron TEFC

**Features:**

- Cast Iron Construction
- Solid Full Frame Length Mounting Feet
- Dual Mounting Holes
- Cast Iron Gasketed Conduit Box
- Stainless Steel Nameplate
- Double Lip Seal on Both Ends
- Class ‘F’ Insulation - Class ‘B’ Temp. Rise
- NEMA MG 1, EEMAC M1-6, CSA C390
- Double Sealed ‘ZZ’ Bearings up to 215T
- Standard (Non-Metric) Hardware
- F-2 Field Convertible
- Conduit Box Can be Rotated 90 Degrees
- Ground Lug in Conduit Box
- Rust Preventative Treated Steel Fan Cover
- VPI Insulation System
- ‘C’ Face Kits Available
- Regreasable Bearings 254T & Larger
- Inverter Duty 20:1 V.T. / 10:1 C.T.
- Oversized Ball Bearings

All Models




**Three Year Warranty**

| Stock # | HP | Volts | Amps. | RPM | “C” | Frame | Efficiency | C Face Kit |
|---|---|---|---|---|---|---|---|---|
| TCP657 | 3 | 575 | 3.10 | 1800 | 15.25” | 182T | 87.5% | CFP18 |
| TCP658 | 5 | 575 | 5.20 | 1800 | 16.00” | 184T | 87.5% | CFP18 |
| TCP659 | 7.5 | 575 | 7.50 | 1800 | 19.00” | 213T | 89.5% | CFP21 |
| TCP65A | 10 | 575 | 10.00 | 1800 | 22.50” | 215T | 89.5% | CFP21 |
| TCP65B | 15 | 575 | 14.90 | 1800 | 23.38” | 254T | 91.0% | CFP25 |
| TCP65C | 20 | 575 | 19.60 | 1800 | 25.13” | 256T | 91.0% | CFP25 |
| TCP65D | 25 | 575 | 23.60 | 1800 | 28.00” | 284T | 92.4% | CFP28 |
| TCP65E | 30 | 575 | 28.30 | 1800 | 29.50” | 286T | 92.4% | CFP28 |
| TCP65F | 40 | 575 | 37.00 | 1800 | 30.25” | 324T | 93.0% | CFP32 |
| TCP65G | 50 | 575 | 46.30 | 1800 | 31.75” | 326T | 93.0% | CFP32 |
| TCP65H | 60 | 575 | 53.60 | 1800 | 33.70” | 364T | 95.0% | CFP36 |
| TCP65I | 75 | 575 | 66.60 | 1800 | 37.10” | 365T | 95.4% | CFP36 |
| TCP65J | 100 | 575 | 90.00 | 1800 | 38.00” | 405T | 95.4% | CFP40 |
| TCP65K | 125 | 575 | 109.00 | 1800 | 45.10” | 444T | 95.4% | CFP44 |
| TCP65L | 150 | 575 | 130.00 | 1800 | 45.10” | 445T | 95.8% | CFP44 |
| TCP65M | 200 | 575 | 172.00 | 1800 | 53.60” | 447T | 96.2% | CFP44 |

# Circulator Motors
## Single Phase Motors - ODP

### Features:

- Mounting Bracket
- Open Drip-Proof
- 1800 RPM
- Single Phase
- Thermally Protected
- Replacements for OEM Motors such as Armstrong, Bell & Gossett & Taco
- Permanently Sealed Ball Bearings

Type 2A & 2B

Type 2C

Type 2C

### Notes:

Type '2A' 4.67" B.C.D. fits # 2 Bearing Assembly
Type '2B' 5.00" B.C.D. fits # 3 & 4 Bearing Assembly
Type '2C' 5.875" B.C.D. fits # 5, 6 & 7 Bearing Assembly

| Stock # | HP | Volts | Amps. | Type | Bearing | Rotation | Replaces |
|---|---|---|---|---|---|---|---|
| SS1350 | 1/12 | 115 | 2.50 | 2A | Ball | CWSE | R1350, 805316-010, 831000-61, 111034 |
| SS1355 | 1/6 | 115 | 3.80 | 2A | Ball | CWSE | ---- |
| SS1352 | 1/6 | 115 | 3.80 | 2B | Ball | CWSE | R1352, 817025-001, 831001-061, 111031 |
| SS1354 | 1/4 | 115 | 4.60 | 2B | Ball | CWSE | R1354, 817025-007, 831002-061, 111040 |
| SS1444 | 1/4 | 115 | 4.60 | 2C | Ball | CCWSE | R1444, 816141-001 |
| SS1356 | 1/3 | 115 | 6.00 | 2B | Ball | CWSE | R1356, 817025-013, 831003-061, 111042 |
| SS1446 | 1/3 | 115 | 6.00 | 2C | Ball | CCWSE | R1446, 816141-002 |
| SS1459 | 1/2 | 115-208 / 230 | 5.70 / 3.00 - 2.90 | 2C | Ball | REV. | R1459, 811757-001, 111044 |
| SS1462 | 3/4 | 115-208 / 230 | 8.20 / 4.70 - 4.20 | 2C | Ball | REV. | R1462, 811757-002, 033, 111047 |

# Jet Pump Motors
## Three Phase Motors - Aluminum Frame TEFC

**Features:**

- 56J Threaded Shaft
- Aluminum Construction
- Continuous Duty
- Class ‘B’ Insulation
- Removable Bolt-on Feet
- 3 Positions for Feet Allow for F-1, F-2, F-0 Conduit Box Location
- Inverter Duty 10:1 V.T. / 2:1 C.T.
- Ball Bearings
- 40°C Ambient
- UL Listed & CSA Approved

All Models




| Stock # | HP | Volts | Amps. | RPM | “C” | Frame |
|---|---|---|---|---|---|---|
| WA631J | 1/3 | 208-230 / 460 | 1.26 - 1.14 / 0.57 | 3600 | 13.19” | 56J |
| WA611J | 1/3 | 575 | 0.46 | 3600 | 13.19” | 56J |
| WA632J | 1/2 | 208-230 / 460 | 1.82 - 1.64 / 0.82 | 3600 | 13.19” | 56J |
| WA612J | 1/2 | 575 | 0.66 | 3600 | 13.19” | 56J |
| WA633J | 3/4 | 208-230 / 460 | 2.59 - 2.34 / 1.17 | 3600 | 13.19” | 56J |
| WA613J | 3/4 | 575 | 0.94 | 3600 | 13.19” | 56J |
| WA634J | 1 | 208-230 / 460 | 3.24 - 2.92 / 1.46 | 3600 | 14.17” | 56HJ |
| WA614J | 1 | 575 | 1.17 | 3600 | 14.17” | 56HJ |
| WA635J | 1-1/2 | 208-230 / 460 | 4.71 - 4.26 / 2.13 | 3600 | 14.17” | 56HJ |
| WA615J | 1-1/2 | 575 | 1.70 | 3600 | 14.17” | 56HJ |
| WA636J | 2 | 208-230 / 460 | 6.02 - 5.44 / 2.72 | 3600 | 14.17” | 56HJ |
| WA616J | 2 | 575 | 2.18 | 3600 | 14.17” | 56HJ |
| WA637J | 3 | 208-230 / 460 | 8.76 - 7.92 / 3.96 | 3600 | 14.17” | 56HJ |
| WA617J | 3 | 575 | 3.17 | 3600 | 14.17” | 56HJ |

# Close Coupled Motors

## Three Phase Motors - Rolled Steel ODP & TEFC

**Features:**

- Rigid Base - Dual Mounting Holes
- Rolled Steel Construction
- Class ‘F’ Insulation
- UL Listed & CSA Approved
- 40°C Ambient
- 1.15 S.F.
- Ball Bearings



TEFC

ODP

| Stock # | HP | Volts | Amps. | RPM | “C” | Frame | Enclosure |
|---|---|---|---|---|---|---|---|
| JM617 | 3 | 575 | 3.10 | 3600 | 15.75” | 145JM | TEFC |
| JM627 | 3 | 575 | 3.20 | 3600 | 14.40” | 145JM | ODP |
| JM607 | 3 | 575 | 3.00 | 3600 | 18.10” | 182JM | TEFC |
| JM657 | 3 | 575 | 3.20 | 1800 | 18.10” | 182JM | TEFC |
| JM608 | 5 | 575 | 4.70 | 3600 | 18.10” | 184JM | TEFC |
| JM658 | 5 | 575 | 5.20 | 1800 | 18.10” | 184JM | TEFC |
| JM629 | 7.5 | 575 | 7.10 | 3600 | 18.50” | 184JM | ODP |
| JM659 | 7.5 | 575 | 7.30 | 1800 | 21.50” | 213JM | TEFC |
| JM60A | 10 | 575 | 9.44 | 3600 | 20.00” | 215JM | TEFC |
| JM65A | 10 | 575 | 10.00 | 1800 | 21.50” | 215JM | TEFC |

# Permanent Magnet
## DC Motors - TEFC & TENV Construction

**Features:**

- Continuous Duty
- Class 'F' Insulation
- UL Listed & CSA Approved
- 40°C Ambient
- 1725 RPM
- 56C or 143/5TC Frame
- Removable Rigid Base
- TENV (Type A)
- TEFC (Type B)
- 20:1 C.T. Speed Range
- Reversible
- Ball Bearings



Type A

Type B

| Stock # | HP | Volts | Amps. | "C" | Type | Frame | Enclosure | Comments |
|---|---|---|---|---|---|---|---|---|
| DC500 | 1/4 | 90 | 2.60 | 10.25" | A | 56C | TENV | Brush Number BR56 |
| DC501 | 1/3 | 90 | 3.50 | 10.25" | A | 56C | TENV | Brush Number BR56 |
| DC502 | 1/2 | 90 | 5.00 | 12.25" | B | 56C | TEFC | Brush Number BR56 |
| DC503 | 3/4 | 90 | 7.60 | 13.75" | B | 56C | TEFC | Brush Number BR56 |
| DC504 | 1 | 90 | 10.00 | 14.75" | B | 56C | TEFC | Brush Number BR56 |
| DC511 | 1/3 | 180 | 1.70 | 10.25" | A | 56C | TENV | Brush Number BR56 |
| DC512 | 1/2 | 180 | 2.50 | 12.25" | B | 56C | TEFC | Brush Number BR56 |
| DC513 | 3/4 | 180 | 3.80 | 13.75" | B | 56C | TEFC | Brush Number BR56 |
| DC514 | 1 | 180 | 5.00 | 14.75" | B | 56C | TEFC | Brush Number BR56 |
| DC515 | 1.5 | 180 | 8.00 | 15.50" | B | 145TC | TEFC | Brush Number BR140 |
| DC516 | 2 | 180 | 9.50 | 18.75" | B | 145TC | TEFC | Brush Number BR140 |
| DC517 | 3 | 180 | 14.00 | 19.25" | B | 145TC | TEFC | Brush Number BR140 |

# Stainless Steel
## Three Phase Motors - TEFC & TENV

**Features:**

- 304 Stainless Steel
- Class 'F' Insulation
- Double Lipped Seals on Both Ends
- Standardized Bearing Cap on All Motors
- C-Face as a Standard on All Motors
- Engraved Name Plates on All Motors
- Totally Enclosed, Fan Cooled (TEFC)
- Totally Enclosed, Non-Ventilated (TENV)
- Oversized Ball Bearings on Both Ends
- High Efficiency
- VPI, Dip and Bake
- 1.15 S.F.

TEFC

TENV




| Stock # | HP | RPM | Volts | Amps. | "C" | Frame | Enclosure | Efficiency |
|---|---|---|---|---|---|---|---|---|
| MS612C | 1/2 | 3600 | 575 | 0.56 | 9-7/8" | 56C | TENV | 78.3% |
| MS613C | 3/4 | 3600 | 575 | 0.84 | 10.00" | 56C | TENV | 81.8% |
| MS614C | 1 | 3600 | 575 | 0.96 | 12-3/8" | 56C | TEFC | 83.2% |
| MS605C | 1.5 | 3600 | 575 | 1.66 | 13.00" | 143TC | TEFC | 84.2% |
| MS606C | 2 | 3600 | 575 | 1.92 | 13-1/2" | 145TC | TEFC | 85.0% |
| MS607C | 3 | 3600 | 575 | 3.00 | 18-5/16" | 182TC | TEFC | 85.5% |
| MS608C | 5 | 3600 | 575 | 4.80 | 19.00" | 184TC | TEFC | 87.5% |
| MS609C | 7.5 | 3600 | 575 | 7.70 | 20-3/16" | 213TC | TEFC | 88.5% |
| MS60AC | 10 | 3600 | 575 | 9.86 | 21-3/8" | 215TC | TEFC | 89.5% |
| MS661C | 1/3 | 1800 | 575 | 0.46 | 10-1/2" | 56C | TENV | 82.7% |
| MS662C | 1/2 | 1800 | 575 | 0.57 | 10.00" | 56C | TENV | 83.0% |
| MS663C | 3/4 | 1800 | 575 | 0.86 | 10.00" | 56C | TENV | 83.2% |
| MS664C | 1 | 1800 | 575 | 1.14 | 12-1/2" | 56C | TEFC | 85.4% |
| MS665C | 1.5 | 1800 | 575 | 1.64 | 13-1/8" | 56C | TEFC | 84.0% |
| MS655C | 1.5 | 1800 | 575 | 1.64 | 13.00" | 145TC | TEFC | 84.0% |
| MS666C | 2 | 1800 | 575 | 2.09 | 13-3/4" | 56C | TEFC | 85.0% |
| MS656C | 2 | 1800 | 575 | 2.09 | 13-3/4" | 145TC | TEFC | 85.0% |
| MS657C | 3 | 1800 | 575 | 3.04 | 18-1/2" | 182TC | TEFC | 87.5% |
| MS658C | 5 | 1800 | 575 | 5.20 | 18-7/8" | 184TC | TEFC | 87.5% |
| MS659C | 7.5 | 1800 | 575 | 8.50 | 19-3/8" | 213TC | TEFC | 89.5% |
| MS65AC | 10 | 1800 | 575 | 10.63 | 21-7/8" | 215TC | TEFC | 89.5% |
| MS702C | 1/2 | 1200 | 575 | 0.22 | 10-3/8" | 56C | TENV | 79.1% |
| MS703C | 3/4 | 1200 | 575 | 1.04 | 10-3/8" | 56C | TENV | 82.9% |
| MS704C | 1 | 1200 | 575 | 1.52 | 12-3/4" | 143TC | TEFC | 85.1% |

# Worm Gear
## Right Angle Speed Reducer

**Features:**

- Hardened Worm Shaft
- NEMA 56C Face Input
- Double-Lip Oil Seals
- Two Bearings on Input Shaft
- O-Rings on Input & Output Covers
- Worm Reducer Ratings at 1750 RPM Input
- Aluminum Alloy Housing with Heat Sink Design
- Standard Hollow Shaft Output Shaft Design
- Permanently Sealed with Synthetic Lubrication

WGR050 WGR063

Left Hand Single

Right Hand Single

Double Shafts

Output Flange (Size 50)

Output Flange (Size 63)

## Technical Specifications

| Stock # | Ratio: | 5 | 7.5 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 80 | 100 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| WGR050 | OUTPUT RPM | 350 | 233 | 175 | 117 | 88 | 70 | 58 | 44 | 35 | 29 | 22 | 18 |
| | MAX. INPUT HP | 3.43 | 2.64 | 2.06 | 1.48 | 1.14 | 0.90 | 0.96 | 0.70 | 0.57 | 0.47 | 0.38 | 0.28 |
| | O/P TORQUE in-lbs | 549 | 628 | 637 | 655 | 646 | 619 | 743 | 672 | 646 | 602 | 575 | 487 |
| WGR063 | OUTPUT RPM | --- | 233 | 175 | 117 | 88 | 70 | 58 | 44 | 35 | 29 | 22 | 18 |
| | MAX. INPUT HP | --- | 4.77 | 3.67 | 2.76 | 2.05 | 1.64 | 1.77 | 1.27 | 1.01 | 0.86 | 0.66 | 0.57 |
| | O/P TORQUE in-lbs | --- | 1133 | 1150 | 1239 | 1194 | 1150 | 1416 | 1283 | 1194 | 1150 | 1079 | 1044 |

## Accessories

| Stock # | Description |
|---|---|
| WGR050-S1, WGR063-S1 | Single Shafts |
| WGR050-S2, WGR063-S2 | Double Shafts |
| WGR050-OF | Output Flange - Size 50 |
| WGR063-OF | Output Flange - Size 63 |

# NEMA Transition Motor Bases

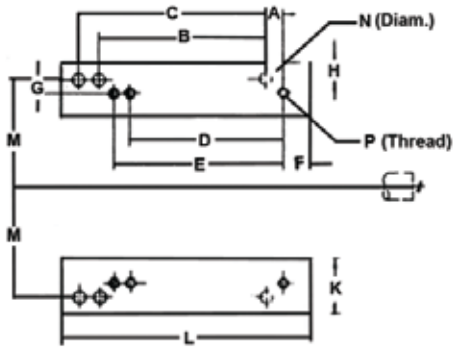


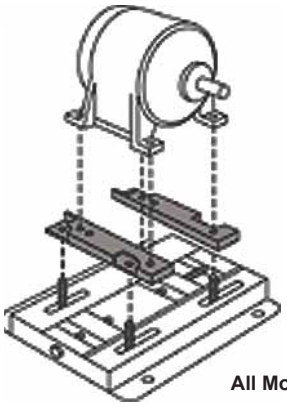

All Models

| Part Number | Former NEMA | New NEMA | O.A. Height | A | B | C | D | E | F | G | H | K | L | M | N | P |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1814T | 182 | 143T | 1 | 1/2 | 4-1/2 | | 4 | | 3/4 | 1 | 1/2 | 2-1/4 | 7-1/2 | 3-3/4 | 7/16 | 5/16-18 |
| | 182 | 145T | 1 | 1/2 | 4-1/2 | | | 5 | 3/4 | 1 | 1/2 | 2-1/4 | 7-1/2 | 3-3/4 | 7/16 | 5/16-18 |
| | 184 | 143T | 1 | 1/2 | | 5-1/2 | 4 | | 3/4 | 1 | 1/2 | 2-1/4 | 7-1/2 | 3-3/4 | 7/16 | 5/16-18 |
| | 184 | 145T | 1 | 1/2 | | 5-1/2 | | 5 | 3/4 | 1 | 1/2 | 2-1/4 | 7-1/2 | 3-3/4 | 7/16 | 5/16-18 |
| 2118T | 213 | 182T | 3/4 | 1 | 5-1/2 | | 4-1/2 | | 1 | 1/2 | 5/8 | 1-7/8 | 9-1/2 | 4-1/4 | 7/16 | 3/8-16 |
| | 213 | 184T | 3/4 | 1 | 5-1/2 | | | 5-1/2 | 1 | 1/2 | 5/8 | 1-7/8 | 9-1/2 | 4-1/4 | 7/16 | 3/8-16 |
| | 215 | 182T | 3/4 | 1 | | 7 | 4-1/2 | | 1 | 1/2 | 5/8 | 1-7/8 | 9-1/2 | 4-1/4 | 7/16 | 3/8-16 |
| | 215 | 184T | 3/4 | 1 | | 7 | | 5-1/2 | 1 | 1/2 | 5/8 | 1-7/8 | 9-1/2 | 4-1/4 | 7/16 | 3/8-16 |
| 25U21T | 254U | 213T | 1 | 1-1/8 | 8-1/4 | | 5-1/2 | | 1 | 3/4 | 3/4 | 2-1/2 | 13 | 5 | 9/16 | 3/8-16 |
| | 253U | 215T | 1 | 1-1/8 | 8-1/4 | | | 7 | 1 | 3/4 | 3/4 | 2-1/2 | 13 | 5 | 9/16 | 3/8-16 |
| | 256U | 213T | 1 | 1-1/8 | | 10 | 5-1/2 | | 1 | 3/4 | 3/4 | 2-1/2 | 13 | 5 | 9/16 | 3/8-16 |
| | 256U | 215T | 1 | 1-1/8 | | 10 | | 7 | 1 | 3/4 | 3/4 | 2-1/2 | 13 | 5 | 9/16 | 3/8-16 |
| 28U25T | 284 | 254T | 3/4 | 1-3/8 | 9-1/2 | | 8-1/4 | | 1-1/4 | 1/2 | 3/4 | 2-1/2 | 14-1/2 | 5-1/2 | 9/16 | 1/2-13 |
| | 284U | 256T | 3/4 | 1-3/8 | 9-1/2 | | | 10 | 1-1/4 | 1/2 | 3/4 | 2-1/2 | 14-1/2 | 5-1/2 | 9/16 | 1/2-13 |
| | 286U | 254T | 3/4 | 1-3/8 | | 11 | 8-1/4 | | 1-1/4 | 1/2 | 3/4 | 2-1/2 | 14-1/2 | 5-1/2 | 9/16 | 1/2-13 |
| | 286U | 256T | 3/4 | 1-3/8 | | 11 | | 10 | 1-1/4 | 1/2 | 3/4 | 2-1/2 | 14-1/2 | 5-1/2 | 9/16 | 1/2-13 |
| 32U28T | 324U | 284T | 1 | 1-1/2 | 10-1/2 | | 9-1/2 | | 1-1/2 | 3/4 | 3/4 | 3 | 16 | 6-1/4 | 11/16 | 1/2-13 |
| | 324U | 286T | 1 | 1-1/2 | 10-1/2 | | | 11 | 1-1/2 | 3/4 | 3/4 | 3 | 16 | 6-1/4 | 11/16 | 1/2-13 |
| | 326U | 284T | 1 | 1-1/2 | | 12 | 9-1/2 | | 1-1/2 | 3/4 | 3/4 | 3 | 16 | 6-1/4 | 11/16 | 1/2-13 |
| | 326U | 286T | 1 | 1-1/2 | | 12 | | 11 | 1-1/2 | 3/4 | 3/4 | 3 | 16 | 6-1/4 | 11/16 | 1/2-13 |
| 36U32T | 364U | 324T | 1 | 1-3/4 | 11-1/4 | | 10-1/2 | | 1-3/4 | 3/4 | 3/4 | 3-1/2 | 16-3/4 | 7 | 11/16 | 5/8-11 |
| | 364U | 326T | 1 | 1-3/4 | 11-1/4 | | | 12 | 1-3/4 | 3/4 | 3/4 | 3-1/2 | 16-3/4 | 7 | 11/16 | 5/8-11 |
| | 365U | 324T | 1 | 1-3/4 | | 12-1/4 | 10-1/2 | | 1-3/4 | 3/4 | 3/4 | 3-1/2 | 16-3/4 | 7 | 11/16 | 5/8-11 |
| | 365U | 326T | 1 | 1-3/4 | | 12-1/4 | | 12 | 1-3/4 | 3/4 | 3/4 | 3-1/2 | 16-3/4 | 7 | 11/16 | 5/8-11 |
| 40U36T | 404U | 364T | 1 | 2 | 12-1/4 | | 11-1/4 | | 2 | 1 | 1-1/4 | 4 | 18-3/4 | 8 | 13/16 | 5/8-11 |
| | 404U | 365T | 1 | 2 | 12-1/4 | | | 12-1/4 | 2 | 1 | 1-1/4 | 4 | 18-3/4 | 8 | 13/16 | 5/8-11 |
| | 405U | 364T | 1 | 2 | | 13-3/4 | 11-1/4 | | 2 | 1 | 1-1/4 | 4 | 18-3/4 | 8 | 13/16 | 5/8-11 |
| | 405U | 365T | 1 | 2 | | 13-3/4 | | 12-1/4 | 2 | 1 | 1-1/4 | 4 | 18-3/4 | 8 | 13/16 | 5/8-11 |
| 44U40T | 444U | 404T | 1 | 2-1/4 | 14-1/2 | | 12-1/4 | | 2-1/4 | 1 | 1-1/4 | 4 | 22 | 9 | 13/16 | 3/4-10 |
| | 444U | 405T | 1 | 2-1/4 | 14-1/2 | | | 13-3/4 | 2-1/4 | 1 | 1-1/4 | 4 | 22 | 9 | 13/16 | 3/4-10 |
| | 445U | 404T | 1 | 2-1/4 | | 16-1/2 | 12-1/4 | | 2-1/4 | 1 | 1-1/4 | 4 | 22 | 9 | 13/16 | 3/4-10 |
| | 445U | 405T | 1 | 2-1/4 | | 16-1/2 | | 13-3/4 | 2-1/4 | 1 | 1-1/4 | 4 | 22 | 9 | 13/16 | 3/4-10 |
| 44U36T | 444U | 364T | 2 | 4-3/8 | 14-1/2 | | 11-1/4 | | 2-1/8 | 2 | 1 | 4-3/4 | 24 | 9 | 13/16 | 5/8-11 |
| | 444U | 365T | 2 | 4-3/8 | 14-1/2 | | | 12-1/4 | 2-1/8 | 2 | 1 | 4-3/4 | 24 | 9 | 13/16 | 5/8-11 |
| | 445U | 364T | 2 | 4-3/8 | | 16-1/2 | 11-1/4 | | 2-1/8 | 2 | 1 | 4-3/4 | 24 | 9 | 13/16 | 5/8-11 |
| | 445U | 365T | 2 | 4-3/8 | | 16-1/2 | | 12-1/4 | 2-1/8 | 2 | 1 | 4-3/4 | 24 | 9 | 13/16 | 5/8-11 |

Dimensions are in inches

# NEMA Adjustable Motor Bases
## Single Adjusting Bolt

**Notes:**

- Weight is Measured in Pounds
- Bases Noted (*) Are Also Available In Standard
- Stock Double Adjusting Style A2
- Adjusting Bolts on Style A2 Bases Are in Line D Bolts on F Dimension
- Custom Built Available
- Made in USA

All Models

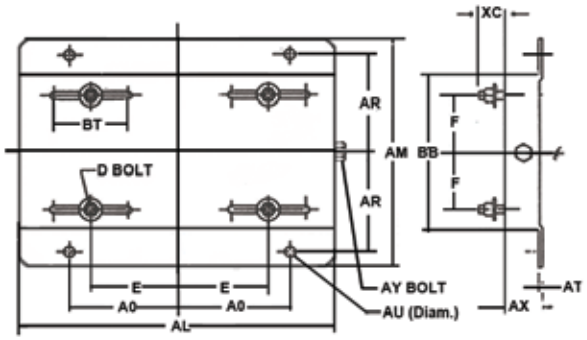


| Frame & Part Number | AL | AM | AX | BB | E | F | AO | AR | AU | BT | AT | XC | D Bolt | AY Bolt | Wgt. (lbs) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| SASB56 | 10-5/8 | 6-1/2 | 1-1/8 | 4-1/2 | 2-7/16 | 1-1/2 | 3-13/16 | 2-7/8 | 3/8 | 3 | 0.078 | 7/8 | 5/16x1 | 3/8x4 | 3 |
| SASB66 | 12 | 8-1/2 | 1-1/8 | 6-1/2 | 3-1/8 | 2-1/2 | 4-1/2 | 3-7/8 | 3/8 | 3 | 0.078 | 7/8 | 5/16x1 | 3/8x4 | 4 |
| SASB143T * | 10-1/2 | 7-1/2 | 1-1/8 | 5-1/2 | 2-3/4 | 2 | 3-3/4 | 3-3/8 | 3/8 | 3 | 0.119 | 13/16 | 5/16x1 | 3/8x4 | 5 |
| SASB145T * | 10-1/2 | 8-1/2 | 1-1/8 | 6-1/2 | 2-3/4 | 2-1/2 | 3-3/4 | 3-7/8 | 3/8 | 3 | 0.119 | 13/16 | 5/16x1 | 3/8x4 | 6 |
| SASB182T * | 12-3/4 | 9-1/2 | 1-1/2 | 6-1/2 | 3-3/4 | 2-1/4 | 4-1/2 | 4-1/4 | 1/2 | 3 | 0.134 | 1-1/2 | 3/8x1-3/4 | 1/2x6 | 9 |
| SASB184T * | 12-3/4 | 10-1/2 | 1-1/2 | 7-1/2 | 3-3/4 | 2-3/4 | 4-1/2 | 4-3/4 | 1/2 | 3 | 0.134 | 1-1/2 | 3/8x1-3/4 | 1/2x6 | 9-1/2 |
| SASB213T * | 15 | 11 | 1-3/4 | 7-1/2 | 4-1/4 | 2-3/4 | 5-1/4 | 4-3/4 | 1/2 | 3-1/2 | 0.164 | 1-1/2 | 3/8x1-3/4 | 1/2x6 | 13-1/2 |
| SASB215T * | 15 | 12-1/2 | 1-3/4 | 9 | 4-1/4 | 3-1/2 | 5-1/4 | 5-1/2 | 1/2 | 3-1/2 | 0.164 | 1-1/2 | 3/8x1-3/4 | 1/2x6 | 15-1/2 |

# NEMA Adjustable Motor Bases
## Double Adjusting Bolt

**Notes:**

- Weight is Measured in Pounds
- Bases Noted (*) Are Also Available With Gussets For Additional Strength; Add The Letter “G” After The Part Number. Example “DASB324T-G”
- Made in USA

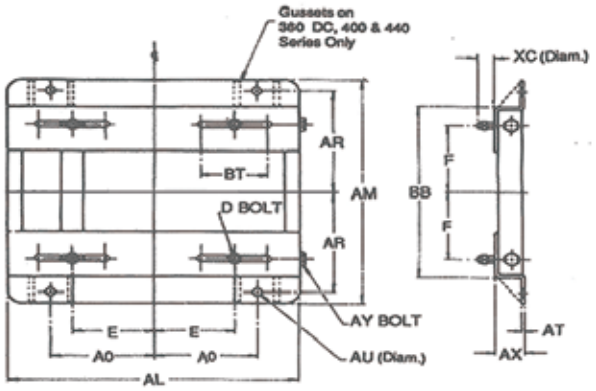


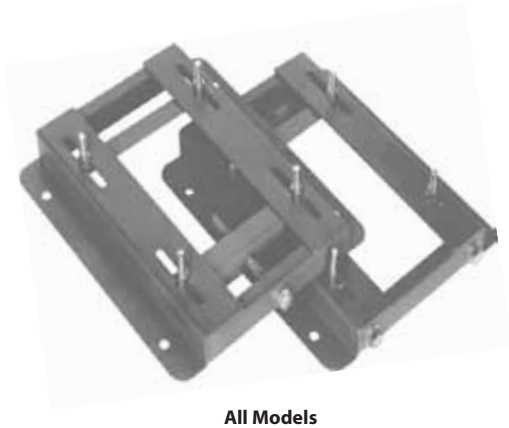

All Models

| Frame & Part Number | AL | AM | AX | BB | E | F | AO | AR | AU | BT | AT | XC | D Bolt | AY Bolt | Wgt. (lbs) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| DASB182T | 12-3/4 | 9-1/2 | 1-1/2 | 6-1/2 | 3-3/4 | 2-1/4 | 4-1/2 | 4-1/4 | 1/3x9/16 | 3 | 0.134 | 1-1/2 | --- | --- | 9 |
| DASB184T | 12-3/4 | 10-1/2 | 1-1/2 | 7-1/2 | 3-3/4 | 2-3/4 | 4-1/2 | 4-3/4 | 1/3x9/16 | 3 | 0.134 | 1-1/2 | --- | --- | 10 |
| DASB213T | 15 | 11 | 1-3/4 | 7-1/2 | 4-1/4 | 2-3/4 | 5-1/4 | 4-3/4 | 1/2x9/16 | 3-1/2 | 0.164 | 1-1/2 | --- | --- | 14 |
| DASB215T | 15 | 12-1/2 | 1-3/4 | 9 | 4-1/4 | 3-1/2 | 5-1/4 | 5-1/2 | 1/2x9/16 | 3-1/2 | 0.164 | 1-1/2 | --- | --- | 16 |
| DASB254T | 17-3/4 | 15-1/8 | 2 | 10-3/4 | 5 | 4-1/8 | 6-1/4 | 6-5/8 | 5/8 | 4 | 3/16 | 1-3/8 | 1/2x1-3/4 | 5/8x9 | 17 |
| DASB256T | 17-3/4 | 16-7/8 | 2 | 12-1/2 | 5 | 5 | 6-1/4 | 7-1/2 | 5/8 | 4 | 3/16 | 1-3/8 | 1/2x1-3/4 | 5/8x9 | 18 |
| DASB284T | 19-3/4 | 16-7/8 | 2 | 12-1/2 | 5-1/2 | 4-3/4 | 7 | 7-1/2 | 5/8 | 4-1/2 | 3/16 | 1-5/8 | 1/2x2 | 5/8x9 | 21 |
| DASB286T | 19-3/4 | 18-3/8 | 2 | 14 | 5-1/2 | 5-1/2 | 7 | 8-1/4 | 5/8 | 4-1/2 | 3/16 | 1-5/8 | 1/2x2 | 5/8x9 | 22 |
| DASB324T * | 22-3/4 | 19-1/4 | 2-1/2 | 14 | 6-1/4 | 5-1/4 | 8 | 8-1/2 | 3/4 | 5-1/4 | 3/16 | 2-1/8 | 5/8x2-1/2 | 3/4x9 | 30 |
| DASB326T * | 22-3/4 | 20-3/4 | 2-1/2 | 15-1/2 | 6-1/4 | 6 | 8 | 9-1/4 | 3/4 | 5-1/4 | 3/16 | 2-1/8 | 5/8x2-1/2 | 3/4x9 | 31 |
| DASB364T * | 25-1/2 | 20-1/2 | 2-1/2 | 15-1/2 | 7 | 5-5/8 | 9 | 9-1/8 | 3/4 | 6 | 1/4 | 2 | 5/8x2-1/2 | 3/4x11 | 45 |
| DASB365T * | 25-1/2 | 21-1/2 | 2-1/2 | 16-1/2 | 7 | 6-1/8 | 9 | 9-5/8 | 3/4 | 6 | 1/4 | 2 | 5/8x2-1/2 | 3/4x11 | 46 |
| DASB404T | 28-3/4 | 22-3/8 | 3 | 16-1/2 | 8 | 6-1/8 | 10 | 9-7/8 | 7/8 | 7 | 1/4 | 2-9/16 | 3/4x3 | 3/4x14 | 55 |
| DASB405T | 28-3/4 | 23-7/8 | 3 | 18 | 8 | 6-7/8 | 10 | 10-5/8 | 7/8 | 7 | 1/4 | 2-9/16 | 3/4x3 | 3/4x14 | 56 |
| DASB444T | 31-1/4 | 24-5/8 | 3 | 19-1/4 | 9 | 7-1/4 | 11 | 11 | 7/8 | 7-1/2 | 5/16 | 2-1/2 | 3/4x3 | 3/4x14 | 74 |
| DASB445T | 31-1/4 | 26-5/8 | 3 | 21-1/4 | 9 | 8-1/4 | 11 | 12 | 7/8 | 7-1/2 | 5/16 | 2-1/2 | 3/4x3 | 3/4x14 | 75 |
| DASB447T | 31-1/4 | 30-1/8 | 3 | 24-3/4 | 9 | 10 | 11 | 13-3/4 | 7/8 | 7-1/2 | 5/16 | 2-1/2 | 3/4x3 | 3/4x14 | 89 |
| DASB449T | 31-1/4 | 35-1/8 | 3 | 29-3/4 | 9 | 12-1/2 | 11 | 16-1/4 | 7/8 | 7-1/2 | 5/16 | 2-1/2 | 3/4x3 | 3/4x14 | 95 |

# Index - Stock Number to Page


| Stock # | Page |
|---|---|
| 1479 | 41 |
| 1495 | 41 |
| 11811 | 38 |
| ‡ 12026 | 38 |
| ‡ 12027 | 11, 38 |
| ‡ 16230 | 19 |
| ‡ 56342 | 34 |
| 56343 | 34 |
| 56344 | 34 |
| ‡ 56345 | 34 |
| 56346 | 34 |
| ‡ 56347 | 11, 34 |
| ‡ 56348 | 34 |
| ‡ 60024 | 34 |
| ‡ 60030 | 35 |
| ‡ 60076 | 35 |
| ‡ 63699 | 35 |
| ‡ 63745 | 35 |
| 63746 | 35 |
| ‡ 63747 | 35 |
| ‡ 63748 | 35 |
| ‡ 63749 | 35 |
| ‡ 63750 | 35 |
| ‡ 63751 | 35 |
| ‡ 63752 | 35 |
| ‡ 63821 | 35 |
| 87219 | 36 |
| ‡ 131410 | 8, 36 |
| ‡ 148053 | 8, 36 |
| ‡ 148055 | 8, 36 |
| ‡ 30080058 | 19 |
| ‡ 30080135 | 19 |
| ‡ 99080481 | 19 |
| ‡ 99080482 | 19 |
| ‡ 99080483 | 19 |
| ‡ 99080484 | 19 |
| ‡ 99080485 | 19 |
| ‡ 99080486 | 19 |
| ‡ 99080487 | 19 |
| ‡ 99080488 | 19 |
| 1223A | 41, 42, 43 |
| 1330A | 43 |
| 1364A | 41, 42, 43 |
| ‡ 1814T | 58 |
| ‡ 2118T | 58 |
| ‡ 25U21T | 58 |
| ‡ 28U25T | 58 |
| ‡ 32U28T | 58 |

| Stock # | Page |
|---|---|
| ‡ 36U32T | 58 |
| ‡ 40U36T | 58 |
| ‡ 44U36T | 58 |
| ‡ 44U40T | 58 |
| ‡ 5BD1076 | 29, 41 |
| ‡ 5BD1106 | 20, 41 |
| ‡ 950-1020 | 37 |
| ‡ 950-1021 | 37 |
| ‡ 950-1022 | 37 |
| ‡ A2000 | 17 |
| BF101 | 4 |
| BF102 | 4 |
| BF51 | 4 |
| BF52 | 4 |
| BF61 | 4 |
| BF62 | 4 |
| BFC24 | 4 |
| BFC36 | 4 |
| ‡ C06E2A | 31 |
| ‡ C07E4A | 31 |
| ‡ C09E4A | 31 |
| ‡ DASB182T | 64 |
| ‡ DASB184T | 64 |
| ‡ DASB213T | 64 |
| ‡ DASB215T | 64 |
| ‡ DASB254T | 64 |
| ‡ DASB256T | 64 |
| ‡ DASB284T | 64 |
| ‡ DASB286T | 64 |
| ‡ DASB324T | 64 |
| ‡ DASB326T | 64 |
| ‡ DASB364T | 64 |
| ‡ DASB365T | 64 |
| ‡ DASB404T | 64 |
| ‡ DASB405T | 64 |
| ‡ DASB444T | 64 |
| ‡ DASB445T | 64 |
| ‡ DASB447T | 64 |
| ‡ DASB449T | 64 |
| DC500 | 59 |
| DC501 | 59 |
| DC502 | 59 |
| DC503 | 59 |
| DC504 | 59 |
| DC511 | 59 |
| DC512 | 59 |
| DC513 | 59 |
| DC514 | 59 |

| Stock # | Page |
|---|---|
| DC515 | 59 |
| DC516 | 59 |
| DC517 | 59 |
| E004 | 21, 34 |
| E015 | 29 |
| ‡ ECR161 | 6 |
| ‡ ECR501 | 6 |
| ‡ ECR502 | 6 |
| F006 | 21 |
| F026 | 34 |
| ‡ F062 | 15, 28 |
| ‡ FD127 | 46 |
| ‡ FD128 | 46 |
| ‡ FD129 | 46 |
| ‡ FD12A | 46 |
| ‡ FD141C | 45 |
| ‡ FD142C | 45 |
| ‡ FD143C | 45 |
| ‡ FD144C | 45 |
| ‡ FD145C | 45 |
| ‡ FD146C | 45 |
| ‡ FD147C | 45 |
| ‡ FD161C | 45 |
| ‡ FD162C | 45 |
| ‡ FD163C | 45 |
| ‡ FD164C | 45 |
| ‡ FD165C | 45 |
| ‡ FD166C | 45 |
| ‡ FD176 | 45 |
| ‡ FD176C | 45 |
| FD177 | 46 |
| FD178 | 46 |
| ‡ FD179 | 46 |
| ‡ FD17A | 46 |
| FG10 | 4 |
| FG5 | 4 |
| FG6 | 4 |
| FLEX50 | 42 |
| FLEX55 | 42 |
| G004 | 29 |
| ‡ G018 | 15, 21 |
| G156 | 31 |
| ‡ HD60FE575 | 20 |
| ‡ J011 | 16, 21 |
| J020 | 31 |
| J055 | 28, 29 |
| JM607 | 58 |
| JM608 | 58 |

# Index - Stock Number to Page


| Stock # | Page |
|---|---|
| JM60A | 58 |
| JM617 | 58 |
| JM627 | 58 |
| JM629 | 58 |
| JM657 | 58 |
| JM658 | 58 |
| JM659 | 58 |
| JM65A | 58 |
| ‡ MA1074 | 20, 35 |
| MO-019 | 34 |
| MO-020 | 34 |
| MO-022 | 34 |
| ‡ MS605C | 60 |
| ‡ MS606C | 60 |
| ‡ MS607C | 60 |
| ‡ MS608C | 60 |
| ‡ MS609C | 60 |
| ‡ MS60AC | 60 |
| ‡ MS612C | 60 |
| ‡ MS613C | 60 |
| ‡ MS614C | 60 |
| ‡ MS655C | 60 |
| ‡ MS656C | 60 |
| ‡ MS657C | 60 |
| ‡ MS658C | 60 |
| ‡ MS659C | 60 |
| ‡ MS65AC | 60 |
| ‡ MS661C | 60 |
| ‡ MS662C | 60 |
| ‡ MS663C | 60 |
| ‡ MS664C | 60 |
| ‡ MS665C | 60 |
| ‡ MS666C | 60 |
| ‡ MS702C | 60 |
| ‡ MS703C | 60 |
| ‡ MS704C | 60 |
| OR547 | 46 |
| OR548 | 46 |
| ‡ ORP654 | 48 |
| ‡ ORP655 | 48 |
| ‡ ORP656 | 48 |
| ‡ ORP657 | 48 |
| ‡ ORP658 | 48 |
| ‡ ORP659 | 48 |
| ‡ ORP65A | 48 |
| ‡ ORP65B | 48 |
| ‡ ORP65C | 48 |
| ‡ ORP674 | 48 |
| ‡ ORP675 | 48 |
| ‡ ORP676 | 48 |
| ‡ ORP677 | 48 |
| ‡ ORP678 | 48 |
| ‡ ORP679 | 48 |
| ‡ ORP67A | 48 |
| P1000-B4 | 20 |
| POC10-1 | 42, 43 |
| POC15-1 | 41, 42 |
| POC25-1 | 41 |
| POC5-1 | 42, 43 |
| POC7.5-1 | 42, 43 |
| ‡ RMT0004 | 35 |
| ‡ RMT0005 | 35 |
| ‡ RMT0062 | 18, 35 |
| ‡ SASB143T | 63 |
| ‡ SASB145T | 63 |
| ‡ SASB182T | 63 |
| ‡ SASB184T | 63 |
| ‡ SASB213T | 63 |
| ‡ SASB215T | 63 |
| ‡ SASB56 | 63 |
| ‡ SASB66 | 63 |
| SS008 | 14, 25 |
| ‡ SS030 | 10 |
| SS101 | 7, 25 |
| SS101L | 7, 25 |
| SS103 | 7, 25 |
| SS103L | 7, 25 |
| SS108 | 7, 28, 30 |
| SS119 | 7, 25 |
| SS120 | 7, 25 |
| SS122 | 7, 21, 25 |
| SS123 | 7, 28 |
| SS124 | 7, 22, 25 |
| SS125 | 7, 22, 25 |
| SS127 | 7, 25 |
| SS130 | 11, 18 |
| SS133 | 7, 31 |
| ‡ SS1332 | 9, 11 |
| ‡ SS1350 | 56 |
| ‡ SS1352 | 56 |
| ‡ SS1354 | 56 |
| ‡ SS1355 | 56 |
| ‡ SS1356 | 56 |
| SS137 | 7, 21 |
| ‡ SS1444 | 56 |
| ‡ SS1446 | 56 |
| ‡ SS1459 | 56 |
| ‡ SS1462 | 56 |
| SS174 | 14, 24 |
| SS201 | 12, 17, 33 |
| SS202 | 12, 33 |
| SS203 | 12, 32, 33 |
| SS205 | 10, 29 |
| SS206 | 12, 17, 32 |
| SS207 | 12, 32, 33 |
| SS208 | 12, 26 |
| SS209 | 12, 32, 33 |
| SS210 | 13, 21, 24 |
| SS212B | 13, 21, 24 |
| SS212S | 13, 21, 34 |
| SS213 | 12, 21, 24, 37 |
| SS214 | 12, 32, 33 |
| SS215 | 13, 21 |
| SS217 | 13, 21, 24, 34 |
| SS219 | 12, 33 |
| SS220 | 12, 30, 32 |
| ‡ SS2224 | 31 |
| ‡ SS2269 | 29 |
| SS230 | 12, 20, 21 |
| SS232 | 12, 33 |
| SS235 | 12, 39 |
| SS236 | 12, 39 |
| SS2360 | 16, 36, 39 |
| ‡ SS2380 | 16, 36, 39 |
| SS2398 | 15, 26 |
| ‡ SS2497 | 15, 31 |
| SS250 | 7, 39 |
| SS260 | 12, 35 |
| SS2603 | 14, 35 |
| SS2604 | 14, 35 |
| SS2605 | 15, 35 |
| SS2609 | 14, 28 |
| SS2612 | 14, 28 |
| SS2615 | 16, 36, 39 |
| SS262 | 12, 26, 35 |
| SS264 | 12, 35 |
| ‡ SS2655 | 34 |
| SS2657 | 14, 29 |
| SS2658 | 14, 24, 29 |
| SS266 | 12, 35 |
| ‡ SS2799 | 37, 38 |
| SS2930 | 15, 26 |
| SS2932 | 15, 26 |
| SS2940 | 15, 26 |


(‡) New Product

# Index - Stock Number to Page


| Stock # | Page |
|---|---|
| SS2942 | 15, 26 |
| SS300 | 10, 18 |
| SS302 | 11, 18, 24 |
| SS303 | 10, 19, 37 |
| SS304 | 10, 33 |
| SS305 | 10, 33 |
| SS307 | 10, 29, 33 |
| SS3100 | 1, 33 |
| SS3101 | 1, 33 |
| SS3103 | 1, 24, 33 |
| SS311 | 10, 33 |
| SS313 | 10, 29, 37 |
| SS315 | 10, 33 |
| SS318 | 10, 18 |
| SS319 | 10 |
| ‡ SS3234 | 31 |
| ‡ SS324 | 19, 23, 11 |
| ‡ SS326 | 10, 18 |
| SS332 | 10, 18 |
| SS336 | 10, 39 |
| ‡ SS34201 | 28 |
| ‡ SS348 | 38 |
| SS350 | 10, 31 |
| SS355 | 10, 33 |
| SS356 | 10, 17, 24, 26 |
| SS357 | 10, 24, 26 |
| SS358 | 10, 18 |
| ‡ SS3583 | 42 |
| ‡ SS3584 | 42 |
| ‡ SS3585 | 42 |
| ‡ SS3586 | 42 |
| ‡ SS3587 | 42 |
| ‡ SS3588 | 42 |
| ‡ SS3589 | 42 |
| SS359 | 11, 18, 24 |
| ‡ SS3590 | 42 |
| SS360 | 10, 29 |
| SS3670 | 1, 17, 21, 33 |
| SS368 | 10, 24, 35 |
| SS369 | 11, 24, 35 |
| SS370 | 10, 24, 29 |
| SS371 | 11, 24, 29 |
| ‡ SS3727 | 43 |
| ‡ SS3728 | 43 |
| ‡ SS3729 | 18, 43 |
| ‡ SS3730 | 18, 43 |
| ‡ SS3731 | 43 |
| SS401 | 12, 23 |
| SS403 | 12, 23, 32 |
| SS408 | 11, 24, 30 |
| SS409 | 10, 24, 26 |
| SS413 | 11, 30 |
| ‡ SS4200 | 31 |
| ‡ SS438 | 38 |
| SS440 | 13, 24, 33 |
| ‡ SS462 | 11, 38 |
| SS467 | 11, 33 |
| SS480 | 11, 21 |
| ‡ SS486 | 44 |
| SS506 | 12, 33, 39 |
| SS510 | 11, 19, 24, 39 |
| ‡ SS5109 | 5 |
| SS511 | 13, 18, 24 |
| ‡ SS5200 | 31 |
| ‡ SS5211 | 5 |
| ‡ SS5212 | 5 |
| ‡ SS5221 | 5 |
| ‡ SS5222 | 5 |
| ‡ SS5311 | 5 |
| ‡ SS5312 | 5 |
| ‡ SS5411 | 5 |
| ‡ SS5412 | 5 |
| ‡ SS5421 | 5 |
| ‡ SS5422 | 5 |
| ‡ SS574 | 18 |
| ‡ SS575 | 18 |
| ‡ SS5811 | 5 |
| ‡ SS5812 | 5 |
| ‡ SS5821 | 5 |
| ‡ SS5822 | 5 |
| SS601 | 1, 33 |
| SS603 | 1, 17, 33 |
| SS604 | 1, 33 |
| SS605 | 1, 18, 25, 33, 38 |
| SS610 | 1, 32, 33, 37 |
| SS611 | 1, 21, 28, 33 |
| SS613 | 1, 33 |
| SS617 | 1, 21 |
| ‡ SS6264 | 31 |
| ‡ SS630 | 1, 35 |
| ‡ SS635 | 1, 21 |
| ‡ SS647 | 44 |
| ‡ SS671 | 9, 11 |
| ‡ SS672 | 9, 11 |
| ‡ SS6920 | 16, 36, 39 |
| ‡ SS739B | 18, 43 |
| ‡ SS740B | 43 |
| ‡ SS749 | 44 |
| ‡ SS750 | 44 |
| ‡ SS751 | 44 |
| ‡ SS752 | 42 |
| ‡ SS753 | 42 |
| ‡ SS754 | 42 |
| ‡ SS799 | 37, 38 |
| SS801 | 12, 33 |
| ‡ SS8318 | 15, 27 |
| ‡ SS9316 | 19 |
| ‡ SS9317 | 19 |
| ‡ SS933 | 40 |
| ‡ SS933D | 40 |
| ‡ SS934 | 40 |
| ‡ SS934B | 40 |
| ‡ SS934D | 40 |
| ‡ SS935 | 40 |
| ‡ SS935B | 40 |
| ‡ SS935D | 40 |
| ‡ SS936D | 40 |
| ‡ SS9428 | 22 |
| SS958 | 14, 26 |
| ‡ SS9721 | 18 |
| ‡ SS973 | 42 |
| ‡ SS974 | 42 |
| ‡ TA604 | 49 |
| ‡ TA604C | 51 |
| ‡ TA605 | 49 |
| ‡ TA605C | 51 |
| ‡ TA606 | 49 |
| ‡ TA606C | 51 |
| ‡ TA607 | 49 |
| ‡ TA607C | 51 |
| ‡ TA624 | 49 |
| ‡ TA624C | 51 |
| ‡ TA625 | 49 |
| ‡ TA625C | 51 |
| ‡ TA626 | 49 |
| ‡ TA626C | 51 |
| ‡ TA627 | 49 |
| ‡ TA627C | 51 |
| ‡ TA654 | 50 |
| ‡ TA654C | 52 |
| ‡ TA655 | 50 |
| ‡ TA655C | 52 |
| ‡ TA656 | 50 |
| ‡ TA656C | 52 |

# Index - Stock Number to Page


| Stock # | Page |
|---|---|
| ‡ TA674 | 50 |
| ‡ TA674C | 52 |
| ‡ TA675 | 50 |
| ‡ TA675C | 52 |
| ‡ TA676 | 50 |
| ‡ TA676C | 52 |
| ‡ TCP657 | 55 |
| ‡ TCP658 | 55 |
| ‡ TCP659 | 55 |
| ‡ TCP65A | 55 |
| ‡ TCP65B | 55 |
| ‡ TCP65C | 55 |
| ‡ TCP65D | 55 |
| ‡ TCP65E | 55 |
| ‡ TCP65F | 55 |
| ‡ TCP65G | 55 |
| ‡ TCP65H | 55 |
| ‡ TCP65I | 55 |
| ‡ TCP65J | 55 |
| ‡ TCP65K | 55 |
| ‡ TCP65L | 55 |
| ‡ TCP65M | 55 |
| ‡ TRP605 | 54 |
| ‡ TRP606 | 54 |
| ‡ TRP607 | 54 |
| ‡ TRP608 | 54 |
| ‡ TRP609 | 54 |
| ‡ TRP60A | 54 |
| ‡ TRP654 | 54 |
| ‡ TRP655 | 54 |
| ‡ TRP656 | 54 |
| ‡ TRP657 | 54 |
| ‡ TRP658 | 54 |
| ‡ TRP659 | 54 |
| ‡ TRP65A | 54 |
| ‡ TRP674 | 54 |
| ‡ TRP675 | 54 |
| ‡ TRP676 | 54 |
| ‡ TRP677 | 54 |
| ‡ TRP678 | 54 |
| ‡ TRP679 | 54 |
| ‡ TRP67A | 54 |
| ‡ TRP704 | 54 |
| ‡ TRP705 | 54 |
| ‡ TRP706 | 54 |
| ‡ TRP707 | 54 |
| ‡ TRP708 | 54 |
| UB1 | 2, 3, 23, 25 |

| Stock # | Page |
|---|---|
| UB160 | 2, 3, 17, 23, 25, 26, 27 |
| UB168 | 2, 3, 27 |
| UB200T-2 | 2, 3, 22 |
| UB265 | 2, 3, 17, 23, 25, 26, 27 |
| UB3 | 2, 3, 23, 25, 32 |
| UB33 | 2, 3, 22, 27, 32 |
| UB4 | 2, 3, 23, 25 |
| UB465 | 2, 3, 17, 23, 25, 26, 27 |
| UB5 | 2, 3, 23, 25 |
| ‡ UB579 | 2, 3, 36 |
| ‡ UFB189 | 2, 3 |
| UFB500 | 2, 3, 22, 23, 27 |
| UFM3714 | 8, 20, 26 |
| UFM410 | 8, 24, 36 |
| UFM653 | 8, 20, 26, 39 |
| UFM78 | 8, 26, 36 |
| ‡ VENT-100 | 4 |
| ‡ VENT-150 | 4 |
| ‡ VENT-200 | 4 |
| ‡ VENT-250 | 4 |
| ‡ VENT-315 | 4 |
| ‡ WA611 | 49 |
| ‡ WA611C | 51 |
| ‡ WA611J | 57 |
| ‡ WA612 | 49 |
| ‡ WA612C | 51 |
| ‡ WA612J | 57 |
| ‡ WA613 | 49 |
| ‡ WA613C | 51 |
| ‡ WA613J | 57 |
| ‡ WA614 | 49 |
| ‡ WA614C | 51 |
| ‡ WA614J | 57 |
| ‡ WA615 | 49 |
| ‡ WA615C | 51 |
| ‡ WA615J | 57 |
| ‡ WA616 | 49 |
| ‡ WA616C | 51 |
| ‡ WA616J | 57 |
| ‡ WA617 | 49 |
| ‡ WA617C | 51 |
| ‡ WA617J | 57 |
| ‡ WA631 | 49 |
| ‡ WA631C | 51 |
| ‡ WA631J | 57 |
| ‡ WA632 | 49 |
| ‡ WA632C | 51 |
| ‡ WA632J | 57 |

| Stock # | Page |
|---|---|
| ‡ WA633 | 49 |
| ‡ WA633C | 51 |
| ‡ WA633J | 57 |
| ‡ WA634 | 49 |
| ‡ WA634C | 51 |
| ‡ WA634J | 57 |
| ‡ WA635 | 49 |
| ‡ WA635C | 51 |
| ‡ WA635J | 57 |
| ‡ WA636 | 49 |
| ‡ WA636C | 51 |
| ‡ WA636J | 57 |
| ‡ WA637 | 49 |
| ‡ WA637C | 51 |
| ‡ WA637J | 57 |
| ‡ WA661 | 50 |
| ‡ WA661C | 52 |
| ‡ WA662 | 50 |
| ‡ WA662C | 52 |
| ‡ WA663 | 50 |
| ‡ WA663C | 52 |
| ‡ WA664 | 50 |
| ‡ WA664C | 52 |
| ‡ WA665 | 50 |
| ‡ WA665C | 52 |
| ‡ WA666 | 50 |
| ‡ WA666C | 52 |
| ‡ WA681 | 50 |
| ‡ WA681C | 52 |
| ‡ WA682 | 50 |
| ‡ WA682C | 52 |
| ‡ WA683 | 50 |
| ‡ WA683C | 52 |
| ‡ WA684 | 50 |
| ‡ WA684C | 52 |
| ‡ WA685 | 50 |
| ‡ WA685C | 52 |
| ‡ WA686 | 50 |
| ‡ WA686C | 52 |
| WD661 | 47 |
| WD662 | 47 |
| WD663 | 47 |
| WD664 | 47 |
| WD665 | 47 |
| WD666 | 47 |
| WD682 | 47 |
| WD683 | 47 |
| WD684 | 47 |


(‡) New Product

# Index - Stock Number to Page


| Stock # | Page |
|---|---|
| WD685 | 47 |
| WD686 | 47 |
| WE612C | 53 |
| WE613C | 53 |
| WE614C | 53 |
| WE615C | 53 |
| WE616C | 53 |
| WE617C | 53 |
| WE661C | 53 |
| WE662C | 53 |
| WE663C | 53 |
| WE664C | 53 |
| WE665C | 53 |
| WE666C | 53 |
| WE681C | 53 |
| WE682C | 53 |
| WE683C | 53 |
| WE684C | 53 |
| WE685C | 53 |
| WE686C | 53 |
| ‡ WGR050 | 61 |
| ‡ WGR063 | 61 |


INTEGRITY OF CATALOG: The information contained in this catalog is for reference purposes only. We strive to ensure that the information is as accurate and current as possible. We are in no way responsible for any errors that may arise. We reserve the right to change specifications and other information included without prior notice. If you are concerned about the validity of the information on a certain product, please visit www.omnidrive.ca and contact us.

DISCLAIMER: All content offered from or available in our catalog are provided to you on an “as is” basis, without representations, warranties or conditions of any kind. You acknowledge and agree that any reliance by you on any information available in this catalog shall be at your own risk.

In no event shall OmniDrive be liable for any consequential, incidental, or any other damages. OmniDrive is also no way liable for any loss of profits the company may face. If for whatever reason, OmniDrive may face an accusation, OmniDrive’s liability does not exceed the purchase price of the equipment involved. All users are solely responsible to evaluate and acknowledge that the goods purchased will suitably meet the requirements of their intended use.

COPYRIGHT AND TRADEMARKS: OmniDrive is a registered trademark. It is owned and operated by 1279311 Ontario Inc. OmniDrive, the OmniDrive logo; images and layouts are and shall remain the trade-marks and exclusive property of OmniDrive. Any misuses of these marks are unlawful.

All rights reserved. You may not produce, copy, modify or redistribute the design or layout of the OmniDrive catalog.

It is important to note that OmniDrive is not affiliated with any of the original equipment manufacturers or their brands which may be referred to herein. Other trade-marks featured in this catalog are the property of their respective owners. No association between OmniDrive and any trademark holder is expressed or implied. The names, numbers, symbols and descriptions featured throughout this catalog are for cross reference purposes only.

Notes:

**BULLETIN # OD-513**

Available from:

© 2013 OmniDrive® All Rights Reserved. OmniDrive® is a Division of 1279311 Ontario Inc. Catalog Printed in Canada